

Two hole 45° Catalog

Compression Connectors

CATEGORY EDITION

Table of Contents

Catalog structure and section page index

#14-#10	3
#8 AWG	5
#6 AWG	8
#4 AWG	13
#2 AWG	16
#1 AWG	20
1/0 AWG	24
2/0 AWG	28
3/0 AWG	31
4/0 AWG	34
250 kcmil	37
300 kcmil	40
350 kcmil	42
400 kcmil	45
450 kcmil	47
500 kcmil	49
600 kcmil	52
700 kcmil	54
750 kcmil	56
800 kcmil	58
900 kcmil	60
1000 kcmil	62
350 kcmil	64
400 kcmil	66
500 kcmil	68
650 kcmil	70
750 kcmil	72
4/0 weld	74
250 kcmil	76
300 kcmil	78

#14-#10

Compression Connectors / Two hole 45°

#14-#10

Compression Connectors / Two hole 45° / #14-#10



Installation Information

Manufacturer	Tools	Color	Code
T&B	ERG2002	--	-
Panduit	CT-100	--	-
Burndy	Y8MRB-1	--	-


#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB141058F	14-10 AWG	-	#10	1.22	0.37	0.05	0.63	0.13
2	DB141058F-250	14-10 AWG	-	#10	1.17	0.38	0.06	0.63	0.13
3	DB141458F-250	#14-#10 AWG	-	1/4	1.25	0.42	0.05	0.63	0.18
4	DB143801F-250	#14-#10 AWG	-	3/8	1.84	0.56	0.04	1.00	0.18
5	LB141058-34F	#14-#10 AWG	-	#10	1.25	0.37	0.07	0.63-0.75	0.18
6	LB141434FP-250	#14-#10 AWG	-	1/4	1.37	0.42	0.05	0.75	0.18
7	LB141434FP-260	#14-#10 AWG	-	1/4	1.39	0.41	0.05	0.75	0.17
8	LB141458-34F	#14-#10 AWG	-	1/4	1.31	0.50	0.13	0.63-0.75	0.18
9	LB141458F	#14-#10 AWG	-	1/4	1.22	0.50	0.05	0.62	0.18
10	LB141458FP-250	#14-#10 AWG	-	1/4	1.25	0.42	0.05	0.63	0.18
11	LB141458FP-260	#14-#10 AWG	-	1/4	1.27	0.41	0.05	0.62	0.17

#8 AWG

Compression Connectors / Two hole 45°

#8 AWG

Compression Connectors / Two hole 45° / #8 AWG

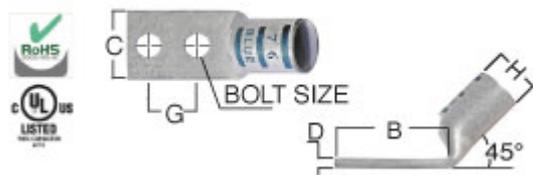


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB081034F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.27	0.41	0.08	0.75	0.23
2	DB081058F	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.18	0.42	0.08	0.62	0.22
3	DB081058F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.17	0.41	0.08	0.62	0.23
4	DB081058F-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.17	0.41	0.08	0.63	0.23
5	DB081058F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.15	0.41	0.08	0.62	0.23
6	DB081058F-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.15	0.41	0.08	0.62	0.23
7	DB081243F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/2	2.83	0.83	0.12	1.75	0.23
8	DB081401F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.62	0.48	0.07	1.00	0.23
9	DB081401F-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.62	0.48	0.07	1.00	0.23
10	DB081401F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.64	0.41	0.08	1.00	0.23
11	DB081401F-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.64	0.44	0.08	1.00	0.23
12	DB081434F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.37	0.48	0.07	0.75	0.23
13	DB081434F-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.37	0.48	0.07	0.75	0.23
14	DB081434F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.39	0.41	0.08	0.75	0.23
15	DB081434F-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.39	0.44	0.08	0.75	0.23
16	DB081458F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.25	0.48	0.07	0.62	0.23
17	DB081458F-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.25	0.48	0.07	0.63	0.23
18	DB081458F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.26	0.41	0.08	0.62	0.23
19	DB081458F-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.26	0.44	0.08	0.62	0.23
20	DB083801F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.73	0.63	0.05	1.00	0.23
21	DB083801F-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.84	0.60	0.05	1.00	0.23
22	DB083801F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.83	0.57	0.06	1.00	0.23
23	DB083801F-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.83	0.58	0.06	1.00	0.23
24	LB081034FP-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.29	0.41	0.08	0.75	0.23
25	LB081034FP-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.29	0.41	0.08	0.75	0.23
26	LB081034FP-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.27	0.41	0.08	0.75	0.23
27	LB081034FP-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.27	0.41	0.08	0.75	0.23
28	LB081058F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.17	0.41	0.08	0.63	0.23
29	LB081058FP-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.17	0.41	0.08	0.63	0.23
30	LB081058FP-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.17	0.41	0.08	0.63	0.23

#8 AWG

Compression Connectors / Two hole 45° / #8 AWG

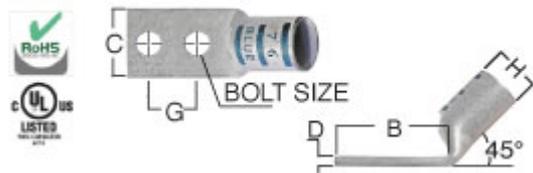

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB081058FP-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.15	0.41	0.08	0.62	0.23
32	LB081058FP-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.15	0.41	0.08	0.63	0.23
33	LB081401F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.62	0.48	0.07	1.00	0.23
34	LB081401FP-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.62	0.48	0.07	1.00	0.23
35	LB081401FP-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.62	0.48	0.07	1.00	0.23
36	LB081401FP-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.83	0.44	0.08	1.00	0.23
37	LB081401FP-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.64	0.44	0.08	1.00	0.23
38	LB081434F	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.29	0.47	0.06	0.75	0.22
39	LB081434F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.37	0.48	0.07	0.75	0.23
40	LB081434F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.39	0.41	0.08	0.75	0.23
41	LB081434FP-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.37	0.48	0.07	0.75	0.23
42	LB081434FP-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.37	0.48	0.07	0.75	0.23
43	LB081434FP-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.39	0.44	0.08	0.75	0.23
44	LB081434FP-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.39	0.44	0.08	0.75	0.23
45	LB081458F	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.89	0.42	0.07	0.62	0.22
46	LB081458F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.25	0.48	0.07	0.63	0.23
47	LB081458F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.26	0.40	0.08	0.62	0.23
48	LB081458FP-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.25	0.48	0.07	0.63	0.23
49	LB081458FP-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.25	0.48	0.07	0.63	0.23
50	LB081458FP-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.26	0.44	0.08	0.62	0.23
51	LB083801F-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.84	0.60	0.05	1.00	0.23
52	LB083801F-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.83	0.73	0.06	1.00	0.23
53	LB083801FP-250	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.84	0.60	0.05	1.00	0.23
54	LB083801FP-251	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.84	0.60	0.05	1.00	0.23
55	LB083801FP-260	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.83	0.58	0.06	1.00	0.23
56	LB083801FP-261	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.83	0.58	0.06	1.00	0.23
57	LB083834F	#8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	1.42	0.47	0.06	0.75	0.22

#6 AWG

Compression Connectors / Two hole 45°

#6 AWG

Compression Connectors / Two hole 45° / #6 AWG

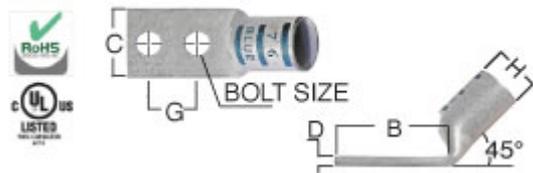


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB061001F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.54	0.46	0.08	1.00	0.27
2	DB061012F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.02	0.42	0.09	0.50	0.26
3	DB061012F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.02	0.48	0.08	0.50	0.27
4	DB061016F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.21	0.44	0.07	0.69	0.27
5	DB061021F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.04	0.46	0.08	1.50	0.27
6	DB061034F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.08	0.75	0.27
7	DB061034F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.08	0.75	0.27
8	DB061034F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.48	0.08	0.75	0.27
9	DB061058-34F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.19	0.44	0.08	0.63-0.75	0.26
10	DB061058F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.08	0.63	0.27
11	DB061058F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.08	0.63	0.27
12	DB061058F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.15	0.42	0.09	0.62	0.26
13	DB061058F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.15	0.44	0.07	0.62	0.27
14	DB061069F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.23	0.46	0.08	0.69	0.27
15	DB061243F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.81	0.12	1.75	0.26
16	DB061243F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.83	0.12	1.75	0.27
17	DB061401F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.56	0.43	0.08	1.00	0.26
18	DB061401F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	0.08	1.00	0.27
19	DB061401F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	0.08	1.00	0.27
20	DB061401F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	0.08	1.00	0.26
21	DB061401F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.48	0.08	1.00	0.27
22	DB061412F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.14	0.45	0.08	0.50	0.26
23	DB061434F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.08	0.75	0.27
24	DB061434F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.08	0.75	0.27
25	DB061434F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.44	0.08	0.75	0.26
26	DB061434F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.48	0.08	0.75	0.27
27	DB061458F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.28	0.44	0.08	0.62	0.26
28	DB061458F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.08	0.63	0.27
29	DB061458F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.08	0.63	0.27
30	DB061458F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.08	0.62	0.26

#6 AWG

Compression Connectors / Two hole 45° / #6 AWG

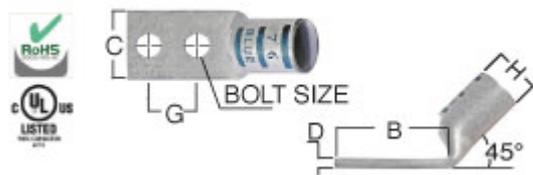


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	DB061458F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.48	0.08	0.62	0.27
32	DB063801F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	0.06	1.00	0.27
33	DB063801F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	0.06	1.00	0.27
34	DB063801F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.63	0.06	1.00	0.26
35	DB063801F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	0.06	1.00	0.27
36	DB065601F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.74	0.56	0.07	1.00	0.27
37	DB065601F-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.74	0.56	0.07	1.00	0.27
38	DB065601F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.70	0.52	0.07	1.00	0.26
39	DB065601F-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.70	0.52	0.07	1.00	0.27
40	DB065634F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.45	0.52	0.07	0.75	0.26
41	LB061034FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.08	0.75	0.27
42	LB061034FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.29	0.46	0.08	0.75	0.27
43	LB061034FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.42	0.09	0.75	0.26
44	LB061034FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.27	0.48	0.08	0.75	0.27
45	LB061058F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.08	0.63	0.27
46	LB061058FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.17	0.46	0.08	0.63	0.27
47	LB061243F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	3.00	0.88	0.11	1.75	0.26
48	LB061243F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.81	0.12	1.75	0.26
49	LB061243FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	2.83	0.83	0.12	1.75	0.26
50	LB061401F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.63	0.43	0.08	1.00	0.26
51	LB061401F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	0.08	1.00	0.27
52	LB061401F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	0.08	1.00	0.26
53	LB061401FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	0.08	1.00	0.27
54	LB061401FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.62	0.48	0.08	1.00	0.27
55	LB061401FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.45	0.08	1.00	0.26
56	LB061401FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.64	0.48	0.08	1.00	0.27
57	LB061412FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.12	0.48	0.08	0.50	0.27
58	LB061434F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.43	0.43	0.08	0.75	0.26
59	LB061434F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.08	0.75	0.27
60	LB061434F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.45	0.08	0.75	0.26

#6 AWG

Compression Connectors / Two hole 45° / #6 AWG

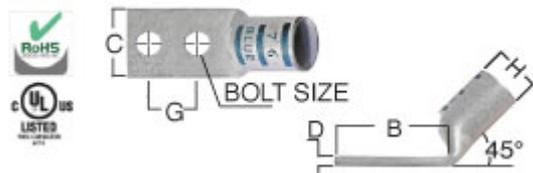


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
61	LB061434FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.08	0.75	0.27
62	LB061434FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.37	0.48	0.08	0.75	0.27
63	LB061434FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.45	0.08	0.75	0.26
64	LB061434FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.39	0.48	0.08	0.75	0.27
65	LB061441FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.87	0.48	0.08	1.25	0.27
66	LB061458F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.28	0.44	0.08	0.62	0.26
67	LB061458F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.08	0.63	0.27
68	LB061458F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.08	0.62	0.26
69	LB061458FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.08	0.63	0.27
70	LB061458FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.25	0.48	0.08	0.63	0.27
71	LB061458FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.26	0.45	0.08	0.62	0.26
72	LB061458FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.27	0.48	0.08	0.63	0.27
73	LB063801F	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.93	0.59	0.06	1.00	0.26
74	LB063801F-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	0.06	1.00	0.27
75	LB063801F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.63	0.06	1.00	0.26
76	LB063801FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	0.06	1.00	0.27
77	LB063801FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.84	0.62	0.06	1.00	0.27
78	LB063801FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	0.06	1.00	0.26
79	LB063801FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.83	0.58	0.06	1.00	0.27
80	LB063834F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.63	0.06	0.75	0.26
81	LB063834FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.59	0.62	0.06	0.75	0.27
82	LB063834FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.58	0.06	0.75	0.26
83	LB063834FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.58	0.58	0.06	0.75	0.27
84	LB063858FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.47	0.62	0.06	0.63	0.27
85	LB063878F-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.63	0.06	0.88	0.26
86	LB063878FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.72	0.62	0.06	0.88	0.27
87	LB063878FP-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.72	0.62	0.06	0.88	0.27
88	LB063878FP-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.58	0.06	0.75	0.26
89	LB063878FP-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	1.71	0.58	0.06	0.88	0.27
90	LB065634FP-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	1.49	0.56	0.07	0.75	0.27

#6 AWG

Compression Connectors / Two hole 45° / #6 AWG

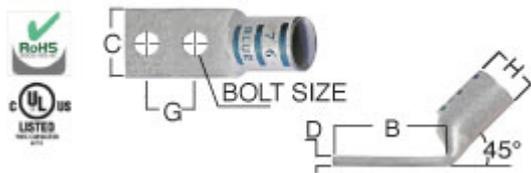

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
91	WP061401F-113	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.15	0.44	0.09	1.00	0.26

#4 AWG

Compression Connectors / Two hole 45°

#4 AWG

Compression Connectors / Two hole 45° / #4 AWG

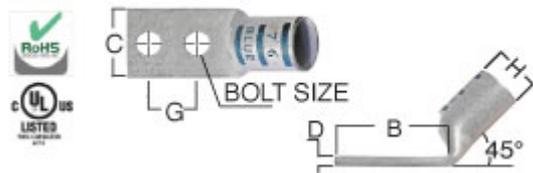


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB041001F-261	#4 AWG	105/24 #4 Weld	#10	1.52	0.41	0.09	1.00	0.33
2	DB041034F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.29	0.55	0.09	0.75	0.33
3	DB041058F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.17	0.55	0.09	0.63	0.33
4	DB041058F-261	#4 AWG	105/24 #4 Weld	#10	1.15	0.41	0.09	0.62	0.33
5	DB041243F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.83	0.12	1.75	0.30
6	DB041243F-261	#4 AWG	105/24 #4 Weld	1/2	2.83	0.83	0.12	1.75	0.33
7	DB041401F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.62	0.55	0.09	1.00	0.33
8	DB041401F-251	#4 AWG	105/24 #4 Weld	1/4	1.62	0.55	0.09	1.00	0.33
9	DB041401F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.64	0.49	0.09	1.00	0.30
10	DB041401F-261	#4 AWG	105/24 #4 Weld	1/4	1.64	0.55	0.09	1.00	0.33
11	DB041434F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.09	0.75	0.33
12	DB041434F-251	#4 AWG	105/24 #4 Weld	1/4	1.37	0.55	0.09	0.75	0.33
13	DB041434F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.49	0.09	0.75	0.30
14	DB041434F-261	#4 AWG	105/24 #4 Weld	1/4	1.39	0.55	0.09	0.75	0.33
15	DB041458F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.28	0.52	0.10	0.63	0.32
16	DB041458F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.09	0.63	0.33
17	DB041458F-251	#4 AWG	105/24 #4 Weld	1/4	1.25	0.55	0.09	0.63	0.33
18	DB041458F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.49	0.09	0.62	0.30
19	DB041458F-261	#4 AWG	105/24 #4 Weld	1/4	1.26	0.55	0.09	0.62	0.33
20	DB043801F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	0.08	1.00	0.33
21	DB043801F-251	#4 AWG	105/24 #4 Weld	3/8	1.84	0.62	0.08	1.00	0.33
22	DB043801F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.58	0.08	1.00	0.30
23	DB043801F-261	#4 AWG	105/24 #4 Weld	3/8	1.83	0.58	0.08	1.00	0.33
24	DB045601F-251	#4 AWG	105/24 #4 Weld	5/16	1.74	0.55	0.09	1.00	0.33
25	DB045601F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	1.70	0.52	0.09	1.00	0.30
26	DB045601F-261	#4 AWG	105/24 #4 Weld	5/16	1.70	0.55	0.09	1.00	0.33
27	LB041034FP-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.29	0.55	0.09	0.75	0.33
28	LB041034FP-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.27	0.49	0.09	0.75	0.30
29	LB041058FP-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	1.17	0.55	0.09	0.63	0.33
30	LB041243F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	3.00	0.88	0.09	1.75	0.32

#4 AWG

Compression Connectors / Two hole 45° / #4 AWG

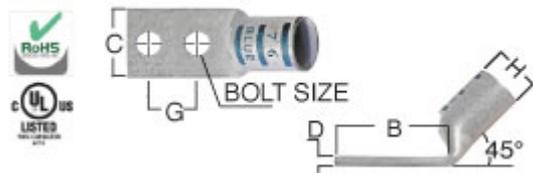

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
31	LB041243F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.81	0.12	1.75	0.30	
32	LB041243FP-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	2.83	0.83	0.12	1.75	0.30	
33	LB041401F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.88	0.58	0.09	1.00	0.32	
34	LB041434F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.31	0.56	0.09	0.75	0.32	
35	LB041434F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.09	0.75	0.33	
36	LB041434F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.50	0.09	0.75	0.30	
37	LB041434FP-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.37	0.55	0.09	0.75	0.33	
38	LB041434FP-251	#4 AWG	105/24 #4 Weld	1/4	1.37	0.55	0.09	0.75	0.33	
39	LB041434FP-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.39	0.49	0.09	0.75	0.30	
40	LB041434FP-261	#4 AWG	105/24 #4 Weld	1/4	1.39	0.55	0.09	0.75	0.33	
41	LB041458F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.19	0.52	0.10	0.62	0.32	
42	LB041458F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.09	0.63	0.33	
43	LB041458F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.50	0.09	0.62	0.30	
44	LB041458FP-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.25	0.55	0.09	0.63	0.33	
45	LB041458FP-251	#4 AWG	105/24 #4 Weld	1/4	1.25	0.55	0.09	0.63	0.33	
46	LB041458FP-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	1.26	0.49	0.09	0.62	0.30	
47	LB041458FP-261	#4 AWG	105/24 #4 Weld	1/4	1.27	0.55	0.09	0.63	0.33	
48	LB043801F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.98	0.59	0.09	1.00	0.32	
49	LB043801F-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	0.08	1.00	0.33	
50	LB043801F-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.56	0.08	1.00	0.30	
51	LB043801FP-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.84	0.62	0.08	1.00	0.33	
52	LB043801FP-251	#4 AWG	105/24 #4 Weld	3/8	1.84	0.62	0.08	1.00	0.33	
53	LB043801FP-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	1.83	0.58	0.08	1.00	0.30	
54	LB043801FP-261	#4 AWG	105/24 #4 Weld	3/8	1.83	0.58	0.08	1.00	0.33	
55	LB043834FP-251	#4 AWG	105/24 #4 Weld	3/8	1.59	0.62	0.08	0.75	0.33	
56	LB043834FP-261	#4 AWG	105/24 #4 Weld	3/8	1.58	0.58	0.08	0.75	0.33	
57	LB045601F	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	1.75	0.56	0.10	1.00	0.32	

#2 AWG

Compression Connectors / Two hole 45°

#2 AWG

Compression Connectors / Two hole 45° / #2 AWG

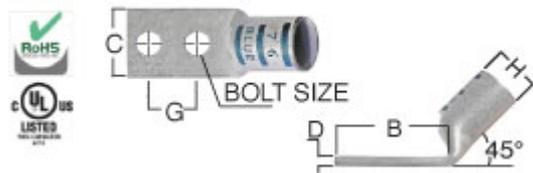


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB021243F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.01	0.75	0.08	1.75	0.37
2	DB021243F-251	#2 AWG	150/24 #2 Weld	1/2	3.01	0.75	0.09	1.75	0.42
3	DB021243F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	2.83	0.83	0.11	1.75	0.36
4	DB021243F-261	#2 AWG	150/24 #2 Weld	1/2	2.83	0.83	0.08	1.75	0.41
5	DB021401F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.63	0.60	0.10	1.00	0.37
6	DB021401F-251	#2 AWG	150/24 #2 Weld	1/4	1.63	0.70	0.11	1.00	0.42
7	DB021401F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.64	0.60	0.11	1.00	0.36
8	DB021401F-261	#2 AWG	150/24 #2 Weld	1/4	1.64	0.68	0.10	1.00	0.41
9	DB021434F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.38	0.60	0.10	0.75	0.37
10	DB021434F-251	#2 AWG	150/24 #2 Weld	1/4	1.38	0.70	0.11	0.75	0.42
11	DB021434F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.39	0.60	0.11	0.75	0.36
12	DB021434F-261	#2 AWG	150/24 #2 Weld	1/4	1.39	0.68	0.10	0.75	0.41
13	DB021458F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.28	0.59	0.11	0.63	0.36
14	DB021458F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.10	0.63	0.37
15	DB021458F-251	#2 AWG	150/24 #2 Weld	1/4	1.26	0.70	0.11	0.63	0.42
16	DB021458F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.11	0.62	0.36
17	DB021458F-261	#2 AWG	150/24 #2 Weld	1/4	1.26	0.68	0.10	0.62	0.41
18	DB023801F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.81	0.60	0.11	1.00	0.36
19	DB023801F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.86	0.66	0.10	1.00	0.37
20	DB023801F-251	#2 AWG	150/24 #2 Weld	3/8	1.83	0.70	0.11	1.00	0.42
21	DB023801F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.60	0.11	1.00	0.36
22	DB023801F-261	#2 AWG	150/24 #2 Weld	3/8	1.83	0.68	0.10	1.00	0.41
23	DB025601F-251	#2 AWG	150/24 #2 Weld	5/16	1.76	0.70	0.11	1.00	0.42
24	DB025601F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.70	0.60	0.11	1.00	0.36
25	DB025601F-261	#2 AWG	150/24 #2 Weld	5/16	1.70	0.68	0.10	1.00	0.41
26	DB025634F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.51	0.66	0.10	0.75	0.37
27	DB025634F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.45	0.60	0.11	0.75	0.36
28	LB021034FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	1.29	0.60	0.10	0.75	0.37
29	LB021034FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	1.27	0.60	0.11	0.75	0.36
30	LB021058FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	1.17	0.60	0.10	0.63	0.37

#2 AWG

Compression Connectors / Two hole 45° / #2 AWG

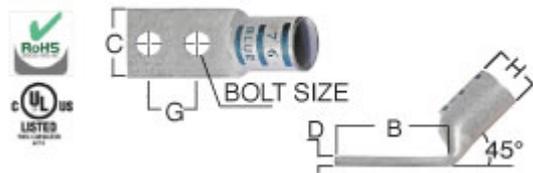


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB021243F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.00	0.88	0.11	1.75	0.36
32	LB021243F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.01	0.75	0.08	1.75	0.37
33	LB021243F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	2.83	0.81	0.12	1.75	0.36
34	LB021243FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.01	0.75	0.08	1.75	0.37
35	LB021243FP-251	#2 AWG	150/24 #2 Weld	1/2	3.01	0.75	0.09	1.75	0.42
36	LB021243FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	2.83	0.83	0.12	1.75	0.36
37	LB021243FP-261	#2 AWG	150/24 #2 Weld	1/2	2.83	0.83	0.10	1.75	0.41
38	LB021401F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.88	0.67	0.09	1.00	0.36
39	LB021401FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.63	0.60	0.10	1.00	0.37
40	LB021401FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.64	0.60	0.11	1.00	0.36
41	LB021434F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.35	0.68	0.11	0.75	0.36
42	LB021434F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.38	0.60	0.10	0.75	0.37
43	LB021434F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.39	0.60	0.11	0.75	0.36
44	LB021434FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.38	0.60	0.10	0.75	0.37
45	LB021434FP-251	#2 AWG	150/24 #2 Weld	1/4	1.38	0.70	0.11	0.75	0.42
46	LB021434FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.39	0.60	0.11	0.75	0.36
47	LB021434FP-261	#2 AWG	150/24 #2 Weld	1/4	1.39	0.68	0.10	0.75	0.41
48	LB021458F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.28	0.59	0.11	0.62	0.36
49	LB021458F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.10	0.63	0.37
50	LB021458F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.11	0.62	0.36
51	LB021458FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.10	0.63	0.37
52	LB021458FP-251	#2 AWG	150/24 #2 Weld	1/4	1.26	0.70	0.11	0.63	0.42
53	LB021458FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	1.26	0.60	0.11	0.62	0.36
54	LB021458FP-261	#2 AWG	150/24 #2 Weld	1/4	1.27	0.68	0.10	0.63	0.41
55	LB023801F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.94	0.59	0.11	1.00	0.36
56	LB023801F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.66	0.10	1.00	0.37
57	LB023801F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.60	0.11	1.00	0.36
58	LB023801FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.66	0.10	1.00	0.37
59	LB023801FP-251	#2 AWG	150/24 #2 Weld	3/8	1.83	0.70	0.11	1.00	0.42
60	LB023801FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.83	0.60	0.11	1.00	0.36

#2 AWG

Compression Connectors / Two hole 45° / #2 AWG

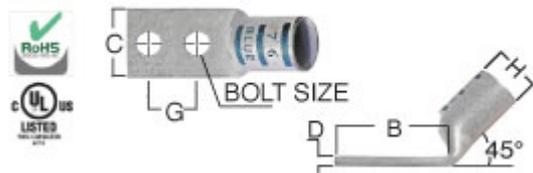

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
61	LB023801FP-261	#2 AWG	150/24 #2 Weld	3/8	1.83	0.68	0.10	1.00	0.41
62	LB023834F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.58	0.60	0.11	0.75	0.36
63	LB023834FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.58	0.66	0.10	0.75	0.37
64	LB023834FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.58	0.60	0.11	0.75	0.36
65	LB023843F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.57	0.59	0.11	1.75	0.36
66	LB023843F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.66	0.10	1.75	0.37
67	LB023843F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.60	0.11	1.75	0.36
68	LB023843FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.66	0.10	1.75	0.37
69	LB023843FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.58	0.60	0.11	1.75	0.36
70	LB023878F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.60	0.11	0.88	0.36
71	LB023878FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.66	0.10	0.88	0.37
72	LB023878FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.60	0.11	=7/8	0.36
73	LB025634F	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.63	0.59	0.11	0.75	0.36
74	LB025634F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.51	0.66	0.10	0.75	0.37
75	LB025634F-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.45	0.60	0.11	0.75	0.36
76	LB025634FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.51	0.66	0.10	0.75	0.37
77	LB025634FP-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.45	0.60	0.11	0.75	0.36
78	LB025678F-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.64	0.66	0.10	0.88	0.37
79	LB025678FP-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	1.64	0.66	0.10	0.88	0.37
80	WP023801F-124	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	1.71	0.59	0.11	1.00	0.36

#1 AWG

Compression Connectors / Two hole 45°

#1 AWG

Compression Connectors / Two hole 45° / #1 AWG

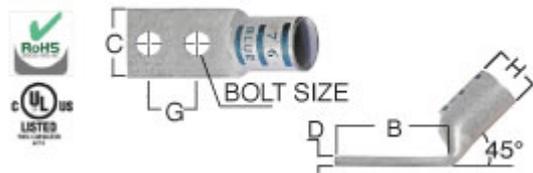


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11

#	Cat.No	Code	Wire Size	Dimension (in.)					
			Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB011243F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	3.01	0.75	0.09	1.75	0.42
2	DB011243F-251	#1 AWG	225/24 #1 Weld	1/2	3.01	0.80	0.12	1.75	0.46
3	DB011243F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	2.83	0.81	0.12	1.75	0.41
4	DB011243F-261	#1 AWG	225/24 #1 Weld	1/2	2.83	0.83	0.11	1.75	0.45
5	DB011401F-251	#1 AWG	225/24 #1 Weld	1/4	1.70	0.76	0.12	1.00	0.46
6	DB011401F-261	#1 AWG	225/24 #1 Weld	1/4	1.64	0.75	0.12	1.00	0.45
7	DB011434F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.38	0.70	0.11	0.75	0.42
8	DB011434F-251	#1 AWG	225/24 #1 Weld	1/4	1.45	0.76	0.12	0.75	0.46
9	DB011434F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.39	0.68	0.10	0.75	0.41
10	DB011434F-261	#1 AWG	225/24 #1 Weld	1/4	1.39	0.75	0.12	0.75	0.45
11	DB011458F	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.28	0.68	0.11	0.63	0.41
12	DB011458F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.26	0.70	0.11	0.63	0.42
13	DB011458F-251	#1 AWG	225/24 #1 Weld	1/4	1.33	0.76	0.12	0.63	0.46
14	DB011458F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.26	0.68	0.10	0.62	0.41
15	DB011458F-261	#1 AWG	225/24 #1 Weld	1/4	1.26	0.75	0.12	0.62	0.45
16	DB013801F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.83	0.70	0.11	1.00	0.42
17	DB013801F-251	#1 AWG	225/24 #1 Weld	3/8	1.83	0.76	0.12	1.00	0.46
18	DB013801F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.83	0.68	0.10	1.00	0.41
19	DB013801F-261	#1 AWG	225/24 #1 Weld	3/8	1.83	0.75	0.12	1.00	0.45
20	DB015601F-251	#1 AWG	225/24 #1 Weld	5/16	1.76	0.76	0.12	1.00	0.46
21	DB015601F-261	#1 AWG	225/24 #1 Weld	5/16	1.70	0.75	0.12	1.00	0.45
22	DB015678F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.64	0.70	0.11	0.88	0.42
23	DB015678F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.57	0.68	0.10	0.88	0.41
24	LB011243F	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	3.00	0.88	0.11	1.75	0.41
25	LB011243F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	3.01	0.75	0.09	1.75	0.42
26	LB011243F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	2.83	0.81	0.12	1.75	0.41
27	LB011243FP-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	3.01	0.75	0.09	1.75	0.42
28	LB011243FP-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	2.83	0.83	0.12	1.75	0.41
29	LB011401FP-251	#1 AWG	225/24 #1 Weld	1/4	1.70	0.76	0.12	1.00	0.46
30	LB011401FP-261	#1 AWG	225/24 #1 Weld	1/4	1.64	0.75	0.12	1.00	0.45

#1 AWG

Compression Connectors / Two hole 45° / #1 AWG

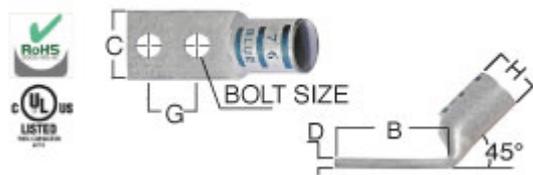


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB011434F	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.40	0.67	0.11	0.75	0.41
32	LB011434F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.38	0.70	0.11	0.75	0.42
33	LB011434F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.39	0.75	0.10	0.75	0.41
34	LB011434FP-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.38	0.70	0.11	0.75	0.42
35	LB011434FP-251	#1 AWG	225/24 #1 Weld	1/4	1.45	0.76	0.12	0.75	0.46
36	LB011434FP-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.39	0.67	0.10	0.75	0.41
37	LB011434FP-261	#1 AWG	225/24 #1 Weld	1/4	1.39	0.75	0.12	0.75	0.45
38	LB011458F	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.19	0.67	0.11	0.62	0.41
39	LB011458F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.26	0.70	0.11	0.63	0.42
40	LB011458F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.26	0.68	0.10	0.62	0.41
41	LB011458FP-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.26	0.70	0.11	0.63	0.42
42	LB011458FP-251	#1 AWG	225/24 #1 Weld	1/4	1.33	0.76	0.12	0.63	0.46
43	LB011458FP-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	1.26	0.67	0.10	0.62	0.41
44	LB011458FP-261	#1 AWG	225/24 #1 Weld	1/4	1.27	0.75	0.12	0.63	0.45
45	LB013801F	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.98	0.67	0.11	1.00	0.41
46	LB013801F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.83	0.70	0.11	1.00	0.42
47	LB013801F-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.83	0.68	0.10	1.00	0.41
48	LB013801FP-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.83	0.70	0.11	1.00	0.42
49	LB013801FP-251	#1 AWG	225/24 #1 Weld	3/8	1.83	0.76	0.12	1.00	0.46
50	LB013801FP-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	1.83	0.67	0.10	1.00	0.41
51	LB013801FP-261	#1 AWG	225/24 #1 Weld	3/8	1.83	0.75	0.12	1.00	0.45
52	LB015601FP-251	#1 AWG	225/24 #1 Weld	5/16	1.76	0.76	0.12	1.00	0.46
53	LB015601FP-261	#1 AWG	225/24 #1 Weld	5/16	1.70	0.75	0.12	1.00	0.45
54	LB015634F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.51	0.70	0.11	0.75	0.42
55	LB015634FP-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.51	0.70	0.11	0.75	0.42
56	LB015678F	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.63	0.67	0.11	0.88	0.41
57	LB015678F-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.64	0.70	0.11	0.88	0.42
58	LB015678FP-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	1.64	0.70	0.11	0.88	0.42
59	LB015678FP-251	#1 AWG	225/24 #1 Weld	5/16	1.64	0.76	0.12	0.88	0.46
60	LB015678FP-261	#1 AWG	225/24 #1 Weld	5/16	1.57	0.75	0.12	0.88	0.45

#1 AWG

Compression Connectors / Two hole 45° / #1 AWG

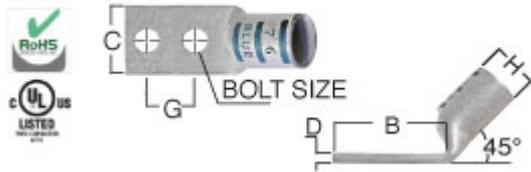

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11


#	Cat.No	Wire Size			Dimension (in.)						
		Code	Flex Class G,H,I,K,M		Bolt Size	B	C	D	G	H	
61	WP011458F-193	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil	175/24 = 70.6 kcmil	133/.0223	1/4	1.23	0.68	0.11	0.62	0.41

1/0 AWG

Compression Connectors / Two hole 45°

1/0 AWG

Compression Connectors / Two hole 45° / 1/0 AWG

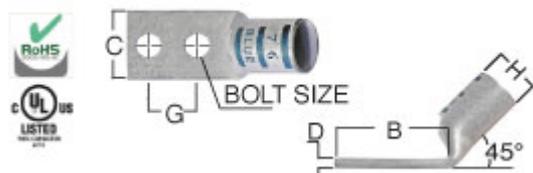


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB101201F-251	1/0 AWG	275/24 1/0 Weld	1/2	2.09	0.85	0.13	1.00	0.52
2	DB101201F-261	1/0 AWG	275/24 1/0 Weld	1/2	2.08	0.83	0.12	1.00	0.50
3	DB101243F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	3.01	0.80	0.12	1.75	0.46
4	DB101243F-251	1/0 AWG	275/24 1/0 Weld	1/2	3.01	0.85	0.13	1.75	0.52
5	DB101243F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	2.83	0.83	0.11	1.75	0.45
6	DB101243F-261	1/0 AWG	275/24 1/0 Weld	1/2	2.83	0.83	0.12	1.75	0.50
7	DB101401F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.64	0.75	0.12	1.00	0.45
8	DB101434F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.55	0.75	0.13	0.75	0.46
9	DB101434F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.45	0.76	0.12	0.75	0.46
10	DB101434F-251	1/0 AWG	275/24 1/0 Weld	1/4	1.53	0.85	0.13	0.75	0.52
11	DB101434F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.39	0.75	0.12	0.75	0.45
12	DB101434F-261	1/0 AWG	275/24 1/0 Weld	1/4	1.39	0.83	0.12	0.75	0.50
13	DB101458F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.33	0.76	0.12	0.63	0.46
14	DB101458F-251	1/0 AWG	275/24 1/0 Weld	1/4	1.41	0.85	0.13	0.63	0.52
15	DB101458F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.26	0.75	0.12	0.62	0.45
16	DB101458F-261	1/0 AWG	275/24 1/0 Weld	1/4	1.26	0.83	0.12	0.62	0.50
17	DB103801F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.93	0.75	0.13	1.00	0.46
18	DB103801F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.83	0.76	0.12	1.00	0.46
19	DB103801F-251	1/0 AWG	275/24 1/0 Weld	3/8	1.84	0.85	0.13	1.00	0.52
20	DB103801F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.83	0.75	0.12	1.00	0.45
21	DB103801F-261	1/0 AWG	275/24 1/0 Weld	3/8	1.83	0.83	0.12	1.00	0.50
22	DB105601F-251	1/0 AWG	275/24 1/0 Weld	5/16	1.78	0.85	0.13	1.00	0.52
23	DB105601F-261	1/0 AWG	275/24 1/0 Weld	5/16	1.70	0.83	0.12	1.00	0.50
24	DB105634F-251	1/0 AWG	275/24 1/0 Weld	5/16	1.53	0.85	0.13	0.75	0.52
25	DB105634F-261	1/0 AWG	275/24 1/0 Weld	5/16	1.45	0.83	0.12	0.75	0.50
26	DB105678F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.64	0.76	0.12	0.88	0.46
27	DB105678F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.57	0.75	0.12	0.88	0.45
28	LB101201F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	2.10	0.80	0.12	1.00	0.46
29	LB101201FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	2.10	0.80	0.12	1.00	0.46
30	LB101243F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	3.00	0.75	0.13	1.75	0.46

1/0 AWG

Compression Connectors / Two hole 45° / 1/0 AWG

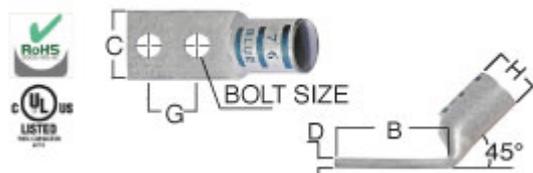


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
31	LB101243F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	3.01	0.80	0.12	1.75	0.46	
32	LB101243F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	2.83	0.81	0.11	1.75	0.45	
33	LB101243FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	3.01	0.80	0.12	1.75	0.46	
34	LB101243FP-251	1/0 AWG	275/24 1/0 Weld	1/2	3.01	0.85	0.13	1.75	0.52	
35	LB101243FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/2	2.83	0.83	0.11	1.75	0.45	
36	LB101243FP-261	1/0 AWG	275/24 1/0 Weld	1/2	2.83	0.83	0.12	1.75	0.48	
37	LB101401F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.88	0.75	0.13	1.00	0.46	
38	LB101401FP	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.88	0.75	0.13	1.00	0.46	
39	LB101401FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.70	0.76	0.12	1.00	0.46	
40	LB101401FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.64	0.75	0.12	1.00	0.45	
41	LB101434F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.38	0.75	0.13	0.75	0.46	
42	LB101434F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.45	0.76	0.12	0.75	0.46	
43	LB101434F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.39	0.75	0.12	0.75	0.45	
44	LB101434FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.45	0.76	0.12	0.75	0.46	
45	LB101434FP-251	1/0 AWG	275/24 1/0 Weld	1/4	1.53	0.85	0.13	0.75	0.52	
46	LB101434FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.39	0.75	0.12	0.75	0.45	
47	LB101434FP-261	1/0 AWG	275/24 1/0 Weld	1/4	1.39	0.83	0.12	0.75	0.48	
48	LB101458F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.19	0.75	0.13	0.62	0.46	
49	LB101458F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.33	0.76	0.12	0.63	0.46	
50	LB101458F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.26	0.75	0.12	0.62	0.45	
51	LB101458FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.33	0.76	0.12	0.63	0.46	
52	LB101458FP-251	1/0 AWG	275/24 1/0 Weld	1/4	1.41	0.85	0.13	0.63	0.52	
53	LB101458FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.26	0.75	0.12	0.62	0.45	
54	LB101458FP-261	1/0 AWG	275/24 1/0 Weld	1/4	1.27	0.83	0.12	0.63	0.48	
55	LB103801F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.98	0.75	0.13	1.00	0.46	
56	LB103801F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.83	0.76	0.12	1.00	0.46	
57	LB103801F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.83	0.75	0.12	1.00	0.45	
58	LB103801FP	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.93	0.75	0.13	1.00	0.46	
59	LB103801FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.83	0.76	0.12	1.00	0.46	
60	LB103801FP-251	1/0 AWG	275/24 1/0 Weld	3/8	1.84	0.85	0.13	1.00	0.52	

1/0 AWG

Compression Connectors / Two hole 45° / 1/0 AWG

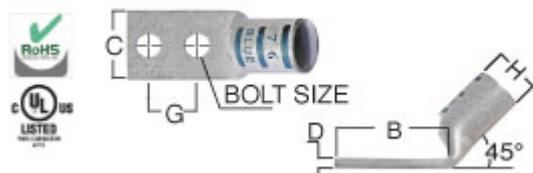

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
61	LB103801FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	1.83	0.75	0.12	1.00	0.45	
62	LB103801FP-261	1/0 AWG	275/24 1/0 Weld	3/8	1.83	0.83	0.12	1.00	0.48	
63	LB103843F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	2.58	0.75	0.12	1.75	0.45	
64	LB103843FP-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	2.58	0.76	0.12	1.75	0.46	
65	LB103843FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	3/8	2.58	0.75	0.12	1.75	0.45	
66	LB105601F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.76	0.76	0.12	1.00	0.46	
67	LB105601F-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.70	0.75	0.12	1.00	0.45	
68	LB105601FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.70	0.75	0.12	1.00	0.45	
69	LB105678F	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.63	0.75	0.13	0.88	0.46	
70	LB105678F-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.64	0.76	0.12	0.88	0.46	
71	LB105678FP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	5/16	1.57	0.75	0.12	0.88	0.45	
72	WP101434F-139	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0 254	1/4	1.79	0.74	0.12	0.75	0.45	

2/0 AWG

Compression Connectors / Two hole 45°

2/0 AWG

Compression Connectors / Two hole 45° / 2/0 AWG

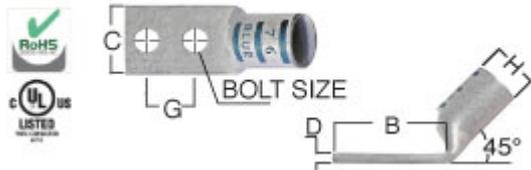


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
1	DB201201F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.81	0.83	0.14	1.00	0.51	
2	DB201201F-251	2/0 AWG	325/24 2/0 Weld	1/2	2.09	0.96	0.13	1.00	0.58	
3	DB201201F-261	2/0 AWG	325/24 2/0 Weld	1/2	2.08	0.93	0.13	1.00	0.57	
4	DB201243F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.01	0.85	0.13	1.75	0.52	
5	DB201243F-251	2/0 AWG	325/24 2/0 Weld	1/2	3.01	0.96	0.13	1.75	0.58	
6	DB201243F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	0.12	1.75	0.50	
7	DB201243F-261	2/0 AWG	325/24 2/0 Weld	1/2	2.83	0.93	0.13	1.75	0.57	
8	DB201401F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.64	0.83	0.12	1.00	0.50	
9	DB201434F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.13	0.75	0.52	
10	DB201434F-251	2/0 AWG	325/24 2/0 Weld	1/4	1.53	0.96	0.13	0.75	0.58	
11	DB201434F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.12	0.75	0.50	
12	DB201434F-261	2/0 AWG	325/24 2/0 Weld	1/4	1.39	0.93	0.13	0.75	0.57	
13	DB201458F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.41	0.85	0.13	0.62	0.52	
14	DB201458F-251	2/0 AWG	325/24 2/0 Weld	1/4	1.41	0.96	0.13	0.62	0.58	
15	DB201458F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.12	0.62	0.50	
16	DB201458F-261	2/0 AWG	325/24 2/0 Weld	1/4	1.26	0.93	0.13	0.62	0.57	
17	DB203801F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.93	0.83	0.13	1.00	0.51	
18	DB203801F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	0.13	1.00	0.52	
19	DB203801F-251	2/0 AWG	325/24 2/0 Weld	3/8	1.84	0.96	0.13	1.00	0.58	
20	DB203801F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	0.12	1.00	0.50	
21	DB203801F-261	2/0 AWG	325/24 2/0 Weld	3/8	1.83	0.93	0.13	1.00	0.57	
22	DB205601F-251	2/0 AWG	325/24 2/0 Weld	5/16	1.78	0.96	0.13	1.00	0.58	
23	DB205601F-261	2/0 AWG	325/24 2/0 Weld	5/16	1.70	0.93	0.13	1.00	0.57	
24	DB205678F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.63	0.83	0.14	0.88	0.51	
25	DB205678F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.66	0.85	0.13	0.88	0.52	
26	DB205678F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.57	0.83	0.12	0.88	0.50	
27	LB201201F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.09	0.85	0.13	1.00	0.52	
28	LB201201FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.09	0.85	0.13	1.00	0.52	
29	LB201243F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.81	0.83	0.13	1.75	0.51	
30	LB201243F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.01	0.85	0.13	1.75	0.52	

2/0 AWG

Compression Connectors / Two hole 45° / 2/0 AWG

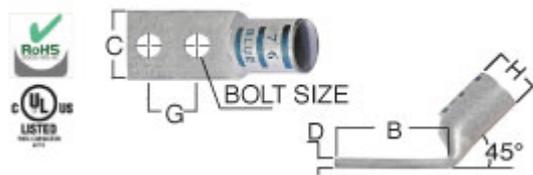

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13


#	Cat.No	Code	Wire Size	Dimension (in.)						
			Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
31	LB201243F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	0.12	1.75	0.50	
32	LB201243FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.01	0.85	0.13	1.75	0.52	
33	LB201243FP-251	2/0 AWG	325/24 2/0 Weld	1/2	3.01	0.96	0.13	1.75	0.58	
34	LB201243FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	2.83	0.83	0.12	1.75	0.50	
35	LB201243FP-261	2/0 AWG	325/24 2/0 Weld	1/2	2.83	0.93	0.13	1.75	0.57	
36	LB201434F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.31	0.81	0.13	0.75	0.51	
37	LB201434F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.13	0.75	0.52	
38	LB201434F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.12	0.75	0.50	
39	LB201434FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.53	0.85	0.13	0.75	0.52	
40	LB201434FP-251	2/0 AWG	325/24 2/0 Weld	1/4	1.53	0.96	0.13	0.75	0.58	
41	LB201434FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.39	0.83	0.12	0.75	0.50	
42	LB201434FP-261	2/0 AWG	325/24 2/0 Weld	1/4	1.39	0.93	0.13	0.75	0.57	
43	LB201458F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.25	0.83	0.13	0.62	0.51	
44	LB201458F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.41	0.85	0.13	0.63	0.52	
45	LB201458F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.12	0.62	0.50	
46	LB201458FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.41	0.85	0.13	0.63	0.52	
47	LB201458FP-251	2/0 AWG	325/24 2/0 Weld	1/4	1.41	0.96	0.13	0.63	0.58	
48	LB201458FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	1.26	0.83	0.12	0.62	0.50	
49	LB201458FP-261	2/0 AWG	325/24 2/0 Weld	1/4	1.27	0.93	0.13	0.63	0.57	
50	LB203801F	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.81	0.83	0.13	1.00	0.51	
51	LB203801F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	0.13	1.00	0.52	
52	LB203801F-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	0.12	1.00	0.50	
53	LB203801FP	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.81	0.83	0.13	1.00	0.51	
54	LB203801FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.84	0.85	0.13	1.00	0.52	
55	LB203801FP-251	2/0 AWG	325/24 2/0 Weld	3/8	1.84	0.96	0.13	1.00	0.58	
56	LB203801FP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	1.83	0.83	0.12	1.00	0.50	
57	LB203801FP-261	2/0 AWG	325/24 2/0 Weld	3/8	1.83	0.93	0.13	1.00	0.57	
58	LB205601F-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.78	0.85	0.13	1.00	0.52	
59	LB205601FP-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	1.78	0.85	0.13	1.00	0.52	

3/0 AWG

Compression Connectors / Two hole 45°

3/0 AWG

Compression Connectors / Two hole 45° / 3/0 AWG

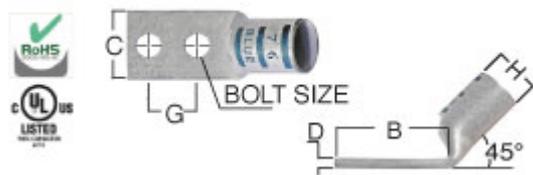


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB301243F	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	2.81	0.94	0.14	1.75	0.57
2	DB301243F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	3.01	0.96	0.13	1.75	0.58
3	DB301243F-251	3/0 AWG	450/24 3/0 Weld	1/2	3.01	1.06	0.14	1.75	0.64
4	DB301243F-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	2.83	0.91	0.13	1.75	0.56
5	DB301243F-261	3/0 AWG	450/24 3/0 Weld	1/2	2.83	1.03	0.14	1.75	0.63
6	DB301434F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/4	1.53	0.96	0.13	0.75	0.58
7	DB301434F-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/4	1.39	0.91	0.12	0.75	0.56
8	DB301458F-251	3/0 AWG	450/24 3/0 Weld	1/4	1.41	1.06	0.14	0.62	0.64
9	DB301458F-261	3/0 AWG	450/24 3/0 Weld	1/4	1.26	1.03	0.14	0.62	0.63
10	DB303801F	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	3/8	1.81	0.94	0.14	1.00	0.57
11	DB303801F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	3/8	1.84	0.96	0.13	1.00	0.58
12	DB303801F-251	3/0 AWG	450/24 3/0 Weld	3/8	1.86	1.06	0.14	1.00	0.64
13	DB303801F-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	3/8	1.83	0.91	0.12	1.00	0.56
14	DB303801F-261	3/0 AWG	450/24 3/0 Weld	3/8	1.83	1.03	0.14	1.00	0.63
15	DB305601F	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	5/16	1.75	0.94	0.14	1.00	0.57
16	DB305601F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	5/16	1.78	0.96	0.13	1.00	0.58
17	DB305601F-251	3/0 AWG	450/24 3/0 Weld	5/16	1.79	1.06	0.14	1.00	0.64
18	DB305601F-261	3/0 AWG	450/24 3/0 Weld	5/16	1.70	1.03	0.14	1.00	0.63
19	LB301201F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	2.09	0.96	0.13	1.00	0.58
20	LB301201FP-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	2.09	0.96	0.13	1.00	0.58
21	LB301243F	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	3.00	0.94	0.13	1.75	0.57
22	LB301243F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	3.01	0.96	0.13	1.75	0.58
23	LB301243F-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	2.83	0.91	0.13	1.75	0.56
24	LB301243FP-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	3.01	0.96	0.13	1.75	0.58
25	LB301243FP-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/2	2.83	0.91	0.13	1.75	0.56
26	LB301434F	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/4	1.45	0.92	0.13	0.75	0.57
27	LB301434F-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/4	1.53	0.96	0.13	0.75	0.58
28	LB301434F-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/4	1.39	0.91	0.12	0.75	0.56
29	LB301434FP-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177	1/4	1.53	0.96	0.13	0.75	0.58
30	LB301434FP-251	3/0 AWG	450/24 3/0 Weld	1/4	1.53	1.06	0.14	0.75	0.64

3/0 AWG

Compression Connectors / Two hole 45° / 3/0 AWG

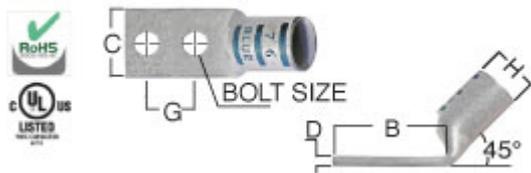

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14


#	Cat.No	Wire Size				Dimension (in.)								
		Code	Flex Class G,H,I,K,M			Bolt Size	B	C	D	G	H			
31	LB301434FP-260	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	1/4	1.39	0.90	0.12	0.75	0.56
32	LB301434FP-261	3/0 AWG	450/24	3/0 Weld					1/4	1.39	1.03	0.14	0.75	0.63
33	LB303801F	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	1.63	0.92	0.13	1.00	0.57
34	LB303801F-250	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	1.84	0.96	0.13	1.00	0.58
35	LB303801F-260	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	1.83	0.90	0.12	1.00	0.56
36	LB303801FP-250	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	1.84	0.96	0.13	1.00	0.58
37	LB303801FP-251	3/0 AWG	450/24	3/0 Weld					3/8	1.86	1.06	0.14	1.00	0.64
38	LB303801FP-260	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	1.83	0.90	0.12	1.00	0.56
39	LB303801FP-261	3/0 AWG	450/24	3/0 Weld					3/8	1.83	1.03	0.14	1.00	0.63
40	LB305601FP-250	3/0 AWG	150 Navy	2/0 Weld	325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	5/16	1.78	0.96	0.13	1.00	0.58

4/0 AWG

Compression Connectors / Two hole 45°

4/0 AWG

Compression Connectors / Two hole 45° / 4/0 AWG

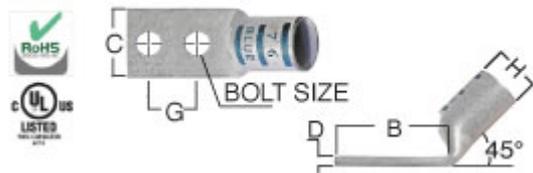


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
1	DB401201F-251	4/0 AWG	550/24 4/0 Weld	1/2	2.09	1.19	0.16	1.00	0.73	
2	DB401201F-261	4/0 AWG	550/24 4/0 Weld	1/2	2.08	1.14	0.15	1.00	0.71	
3	DB401241F-251	4/0 AWG	550/24 4/0 Weld	1/2	2.37	1.19	0.16	1.25	0.73	
4	DB401241F-261	4/0 AWG	550/24 4/0 Weld	1/2	2.33	1.14	0.15	1.25	0.71	
5	DB401243F	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.00	1.03	0.14	1.75	0.63	
6	DB401243F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.01	1.06	0.14	1.75	0.64	
7	DB401243F-251	4/0 AWG	550/24 4/0 Weld	1/2	3.01	1.19	0.16	1.75	0.73	
8	DB401243F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	2.83	1.02	0.14	1.75	0.63	
9	DB401243F-261	4/0 AWG	550/24 4/0 Weld	1/2	2.83	1.20	0.15	1.75	0.71	
10	DB401243F-263	4/0 AWG	550/24 4/0 Weld	1/2	2.83	1.14	0.15	1.75	0.71	
11	DB401401F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.64	1.02	0.14	1.00	0.63	
12	DB401434F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.53	1.06	0.14	0.75	0.64	
13	DB401434F-251	4/0 AWG	550/24 4/0 Weld	1/4	1.41	1.19	0.16	0.75	0.73	
14	DB401434F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.39	1.02	0.14	0.75	0.63	
15	DB401434F-261	4/0 AWG	550/24 4/0 Weld	1/4	1.39	1.12	0.15	0.75	0.71	
16	DB401458F-251	4/0 AWG	550/24 4/0 Weld	1/4	1.22	1.19	0.16	0.63	0.73	
17	DB401458F-261	4/0 AWG	550/24 4/0 Weld	1/4	1.26	1.12	0.15	0.62	0.71	
18	DB403801F	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.93	1.03	0.14	1.00	0.63	
19	DB403801F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.86	1.06	0.14	1.00	0.64	
20	DB403801F-251	4/0 AWG	550/24 4/0 Weld	3/8	1.82	1.19	0.16	1.00	0.73	
21	DB403801F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.83	1.02	0.14	1.00	0.63	
22	DB403801F-261	4/0 AWG	550/24 4/0 Weld	3/8	1.83	1.12	0.15	1.00	0.71	
23	DB403834F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.58	1.02	0.14	0.75	0.63	
24	DB405601F-251	4/0 AWG	550/24 4/0 Weld	5/16	1.79	1.19	0.16	1.00	0.73	
25	DB405601F-261	4/0 AWG	550/24 4/0 Weld	5/16	1.70	1.12	0.15	1.00	0.71	
26	DB405643F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	2.45	1.02	0.14	1.75	0.63	
27	LB401201F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	2.09	1.06	0.14	1.00	0.64	
28	LB401201FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	2.09	1.06	0.14	1.00	0.64	
29	LB401243F	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.00	1.03	0.14	1.75	0.63	
30	LB401243F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.01	1.06	0.14	1.75	0.64	

4/0 AWG

Compression Connectors / Two hole 45° / 4/0 AWG

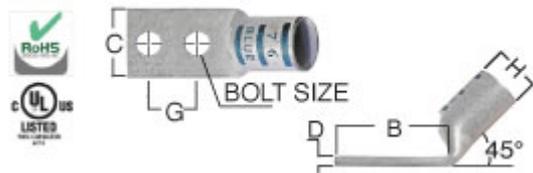

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
31	LB401243F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	2.83	1.02	0.14	1.75	0.63	
32	LB401243FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.01	1.06	0.14	1.75	0.64	
33	LB401243FP-251	4/0 AWG	550/24 4/0 Weld	1/2	3.01	1.19	0.16	1.75	0.73	
34	LB401243FP-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	2.83	1.02	0.14	1.75	0.63	
35	LB401243FP-261	4/0 AWG	550/24 4/0 Weld	1/2	2.83	1.14	0.15	1.75	0.71	
36	LB401434F	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.38	1.03	0.14	0.75	0.63	
37	LB401434F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.53	1.06	0.14	0.75	0.64	
38	LB401434F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.39	1.02	0.14	0.75	0.63	
39	LB401434FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.53	1.06	0.14	0.75	0.64	
40	LB401434FP-251	4/0 AWG	550/24 4/0 Weld	1/4	1.41	1.19	0.16	0.75	0.73	
41	LB401434FP-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.39	1.02	0.14	0.75	0.63	
42	LB401434FP-261	4/0 AWG	550/24 4/0 Weld	1/4	1.39	1.14	0.15	0.75	0.71	
43	LB401458FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.41	1.06	0.14	0.63	0.64	
44	LB403801F	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.81	1.03	0.14	1.00	0.63	
45	LB403801F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.86	1.06	0.14	1.00	0.64	
46	LB403801F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.83	1.02	0.14	1.00	0.63	
47	LB403801FP	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.88	1.03	0.14	1.00	0.63	
48	LB403801FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.86	1.06	0.14	1.00	0.64	
49	LB403801FP-251	4/0 AWG	550/24 4/0 Weld	3/8	1.82	1.19	0.16	1.00	0.73	
50	LB403801FP-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.83	1.02	0.14	1.00	0.63	
51	LB403801FP-261	4/0 AWG	550/24 4/0 Weld	3/8	1.83	1.14	0.15	1.00	0.71	
52	LB403843F	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.63	1.03	0.14	1.75	0.63	
53	LB403843F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.61	1.06	0.14	1.75	0.64	
54	LB403843F-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.58	1.02	0.14	1.75	0.63	
55	LB403843FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.61	1.06	0.14	1.75	0.64	
56	LB403843FP-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.58	1.02	0.14	1.75	0.63	
57	LB405601F-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	1.79	1.06	0.14	1.00	0.64	
58	LB405601FP-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	1.79	1.06	0.14	1.00	0.64	
59	LB405643FP-261	-	550/24 4/0 Weld	5/16	2.45	1.20	0.16	1.75	0.71	

250 kcmil

Compression Connectors / Two hole 45°

250 kcmil

Compression Connectors / Two hole 45° / 250 kcmil

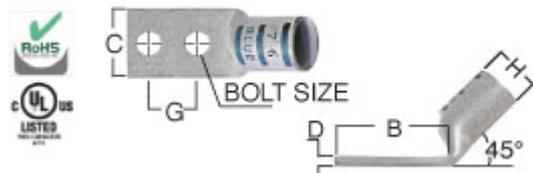


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB251241F-251	250 kcmil	262.6 kcmil	1/2	2.37	1.28	0.17	1.25	0.79
2	DB251241F-261	250 kcmil	Class G 259 Str Class H 427 Str	1/2	2.33	1.20	0.16	1.25	0.73
3	DB251241F-263	-	250 kcmil 637/24 Class I, K, M	1/2	2.33	1.29	0.18	1.25	0.79
4	DB251243F	250 kcmil	250 Navy	1/2	2.81	1.13	0.18	1.75	0.71
5	DB251243F-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.018	1/2	2.81	0.94	0.14	1.75	0.75
6	DB251243F-250	250 kcmil	250 Navy	1/2	3.01	1.17	0.14	1.75	0.70
7	DB251243F-251	250 kcmil	262.6 kcmil	1/2	3.01	1.28	0.17	1.75	0.79
8	DB251243F-260	250 kcmil	250 Navy	1/2	2.83	1.11	0.16	1.75	0.68
9	DB251243F-261	250 kcmil	Class G 259 Str Class H 427 Str	1/2	2.83	1.20	0.16	1.75	0.73
10	DB251243F-263	-	250 kcmil 637/24 Class I, K, M	1/2	2.83	1.29	0.18	1.75	0.79
11	DB253801F	250 kcmil	250 Navy	3/8	1.93	1.13	0.14	1.00	0.71
12	DB253801F-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.018	3/8	2.80	1.25	0.15	1.00	0.75
13	DB253801F-250	250 kcmil	250 Navy	3/8	1.86	1.17	0.14	1.00	0.70
14	DB253801F-251	250 kcmil	262.6 kcmil	3/8	1.82	1.28	0.17	1.00	0.79
15	DB253801F-260	250 kcmil	250 Navy	3/8	1.83	1.11	0.16	1.00	0.68
16	DB253801F-261	250 kcmil	Class G 259 Str Class H 427 Str	3/8	1.83	1.20	0.16	1.00	0.73
17	DB253801F-263	-	250 kcmil 637/24 Class I, K, M	3/8	1.83	1.29	0.18	1.00	0.79
18	DB253843F-251	250 kcmil	262.6 kcmil	3/8	2.57	1.28	0.17	1.75	0.79
19	DB253843F-261	-	250 kcmil 637/24 Class I, K, M	3/8	2.58	1.29	0.18	1.75	0.79
20	LB251201F-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.09	1.17	0.14	1.00	0.70
21	LB251201FP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.09	1.17	0.14	1.00	0.70
22	LB251243F	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	3.00	1.13	0.14	1.75	0.70
23	LB251243F-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	3.01	1.17	0.14	1.75	0.70
24	LB251243F-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.83	1.11	0.16	1.75	0.68
25	LB251243FP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	3.01	1.17	0.14	1.75	0.70
26	LB251243FP-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.83	1.10	0.16	1.75	0.68
27	LB251434FP-251	250 kcmil	262.6 kcmil	1/4	1.34	1.28	0.17	0.75	0.79
28	LB251434FP-261	-	250 kcmil 637/24 Class I, K, M	1/4	1.39	1.29	0.18	0.75	0.76
29	LB253801F	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.93	1.13	0.14	1.00	0.70
30	LB253801F-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.86	1.17	0.14	1.00	0.70

250 kcmil

Compression Connectors / Two hole 45° / 250 kcmil

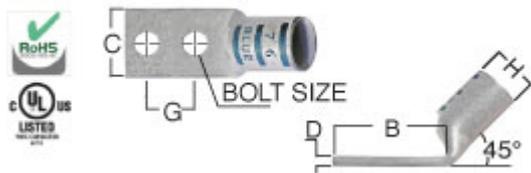

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB253801F-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.83	1.10	0.16	1.00	0.68
32	LB253801FP	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.93	1.13	0.14	1.00	0.70
33	LB253801FP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.86	1.17	0.14	1.00	0.70
34	LB253801FP-251	250 kcmil	262.6 kcmil	3/8	1.82	1.28	0.17	1.00	0.79
35	LB253801FP-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.83	1.10	0.14	1.00	0.68
36	LB253801FP-261	250 kcmil	Class G 259 Str Class H 427 Str	3/8	1.83	1.20	0.16	1.00	0.79
37	LB253801FP-263	-	250 kcmil 637/24 Class I, K, M	3/8	1.83	1.28	0.18	1.00	0.79
38	LB255601FP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	5/16	1.79	1.17	0.14	1.00	0.70

300 kcmil

Compression Connectors / Two hole 45°

300 kcmil

Compression Connectors / Two hole 45° / 300 kcmil

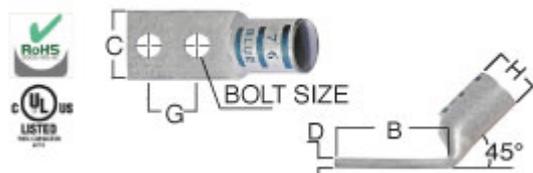

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	CT-720 CT-920	White	P66
Burndy	Y35 Y45	White	17


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB311243F	300 kcmil	300 Navy	1/2	3.00	1.25	0.15	1.75	0.78
2	DB311243F-250	300 kcmil	300 Navy	1/2	3.01	1.19	0.16	1.75	0.72
3	DB311243F-251	-	313.1 kcmil 775/24 300 kcmil	1/2	3.01	1.39	0.18	1.75	0.86
4	DB311243F-260	300 kcmil	300 Navy	1/2	2.83	1.20	0.16	1.75	0.73
5	DB311243F-261	-	313.1 kcmil 775/24 300 kcmil	1/2	2.83	1.38	0.19	1.75	0.86
6	DB313801F	300 kcmil	300 Navy	3/8	1.93	1.25	0.15	1.00	0.78
7	DB313801F-250	300 kcmil	300 Navy	3/8	1.82	1.19	0.16	1.00	0.72
8	DB313801F-251	-	313.1 kcmil 775/24 300 kcmil	3/8	1.82	1.39	0.18	1.00	0.86
9	DB313801F-260	300 kcmil	300 Navy	3/8	1.83	1.20	0.16	1.00	0.73
10	DB313801F-261	-	313.1 kcmil 775/24 300 kcmil	3/8	1.83	1.38	0.19	1.00	0.86
11	LB311243F	300 kcmil	300 Navy	1/2	3.00	1.25	0.15	1.75	0.78
12	LB311243F-250	300 kcmil	300 Navy	1/2	3.01	1.19	0.16	1.75	0.72
13	LB311243F-260	300 kcmil	300 Navy	1/2	2.83	1.20	0.16	1.75	0.73
14	LB311243FP-250	300 kcmil	300 Navy	1/2	3.01	1.19	0.16	1.75	0.72
15	LB311243FP-260	300 kcmil	300 Navy	1/2	2.83	1.20	0.16	1.75	0.73
16	LB313801F	300 kcmil	300 Navy	3/8	2.80	1.25	0.15	1.00	0.78
17	LB313801F-250	300 kcmil	300 Navy	3/8	1.82	1.19	0.16	1.00	0.72
18	LB313801F-260	300 kcmil	300 Navy	3/8	1.83	1.20	0.16	1.00	0.73
19	LB313801FP-250	300 kcmil	300 Navy	3/8	1.82	1.19	0.16	1.00	0.72
20	LB313801FP-251	-	313.1 kcmil 775/24 300 kcmil	3/8	1.82	1.39	0.18	1.00	0.86
21	LB313801FP-260	300 kcmil	300 Navy	3/8	1.83	1.20	0.16	1.00	0.73
22	LB313801FP-261	-	313.1 kcmil 775/24 300 kcmil	3/8	1.83	1.55	0.19	1.00	0.86

350 kcmil

Compression Connectors / Two hole 45°

350 kcmil

Compression Connectors / Two hole 45° / 350 kcmil

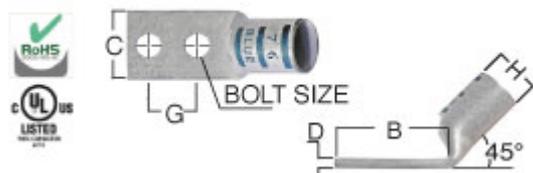


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
1	DB351241F-250	350 kcmil	350 Navy	1/2	2.37	1.28	0.17	1.25	0.79	
2	DB351241F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.37	1.54	0.22	1.25	0.95	
3	DB351241F-260	350 kcmil	350 Navy	1/2	2.33	1.29	0.18	1.25	0.79	
4	DB351241F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.33	1.52	0.23	1.25	0.95	
5	DB351243F	350 kcmil	350 Navy	1/2	3.00	1.36	0.18	1.75	0.84	
6	DB351243F-250	350 kcmil	350 Navy	1/2	3.01	1.28	0.16	1.75	0.79	
7	DB351243F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	3.01	1.54	0.22	1.75	0.95	
8	DB351243F-260	350 kcmil	350 Navy	1/2	2.83	1.29	0.18	1.75	0.79	
9	DB351243F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.83	1.52	0.23	1.75	0.95	
10	DB351434F-250	350 kcmil	350 Navy	1/4	1.34	1.28	0.17	0.75	0.79	
11	DB351434F-260	350 kcmil	350 Navy	1/4	1.39	1.29	0.18	0.75	0.79	
12	DB353801F	350 kcmil	350 Navy	3/8	1.93	1.36	0.18	1.00	0.84	
13	DB353801F-250	350 kcmil	350 Navy	3/8	1.82	1.28	0.17	1.00	0.79	
14	DB353801F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.82	1.54	0.22	1.00	0.95	
15	DB353801F-260	350 kcmil	350 Navy	3/8	1.83	1.29	0.18	1.00	0.79	
16	DB353801F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.83	1.52	0.23	1.00	0.95	
17	DB353843F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	2.57	1.54	0.22	1.75	0.95	
18	DB353843F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	2.58	1.55	0.23	1.75	0.95	
19	DB355601F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	5/16	1.75	1.55	0.22	1.00	0.95	
20	DB355601F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	5/16	1.70	1.55	0.23	1.00	0.95	
21	DB355643F-260	350 kcmil	350 Navy	5/16	2.45	1.29	0.18	1.75	0.79	
22	LB351243F	350 kcmil	350 Navy	1/2	3.00	1.36	0.18	1.75	0.84	
23	LB351243F-250	350 kcmil	350 Navy	1/2	3.01	1.28	0.17	1.75	0.79	
24	LB351243F-260	350 kcmil	350 Navy	1/2	2.83	1.29	0.18	1.75	0.79	
25	LB351243FP-250	350 kcmil	350 Navy	1/2	3.01	1.28	0.17	1.75	0.79	
26	LB351243FP-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	3.01	1.54	0.22	1.75	0.95	
27	LB351243FP-260	350 kcmil	350 Navy	1/2	2.83	1.29	0.18	1.75	0.79	
28	LB351243FP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.83	1.55	0.23	1.75	0.95	
29	LB351434F	350 kcmil	350 Navy	1/4	1.93	1.36	0.18	0.75	0.84	
30	LB351434F-250	350 kcmil	350 Navy	1/4	1.34	1.28	0.17	0.75	0.79	

350 kcmil

Compression Connectors / Two hole 45° / 350 kcmil

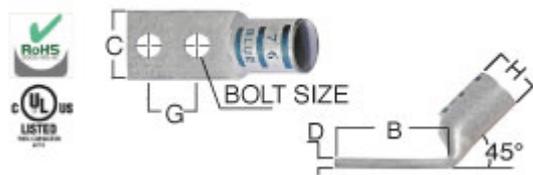

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB351434F-260	350 kcmil	350 Navy	1/4	1.39	1.29	0.18	0.75	0.79
32	LB351434FP-250	350 kcmil	350 Navy	1/4	1.34	1.28	0.17	0.75	0.79
33	LB351434FP-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/4	1.34	1.54	0.22	0.75	0.95
34	LB351434FP-260	350 kcmil	350 Navy	1/4	1.39	1.29	0.18	0.75	0.79
35	LB351434FP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/4	1.39	1.55	0.23	0.75	0.95
36	LB353801F	350 kcmil	350 Navy	3/8	1.93	1.36	0.18	1.00	0.84
37	LB353801F-250	350 kcmil	350 Navy	3/8	1.82	1.28	0.17	1.00	0.79
38	LB353801F-260	350 kcmil	350 Navy	3/8	1.83	1.29	0.18	1.00	0.79
39	LB353801FP	350 kcmil	350 Navy	3/8	1.93	1.36	0.18	1.00	0.84
40	LB353801FP-250	350 kcmil	350 Navy	3/8	1.82	1.28	0.17	1.00	0.79
41	LB353801FP-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.82	1.54	0.22	1.00	0.95
42	LB353801FP-260	350 kcmil	350 Navy	3/8	1.83	1.29	0.18	1.00	0.79
43	LB353801FP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.83	1.55	0.23	1.00	0.95
44	WP351243F-082	350 kcmil	350 Navy	1/2	2.79	1.29	0.18	1.75	0.80
45	WP353801F-044	350 kcmil	350 Navy	3/8	1.79	1.29	0.18	1.00	0.80

400 kcmil

Compression Connectors / Two hole 45°

400 kcmil

Compression Connectors / Two hole 45° / 400 kcmil

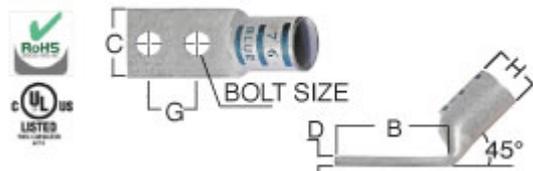

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-720 CT-920	Blue	P76
Burndy	Y35 Y45	Blue	19


#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB411243F-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.03066	1/2	3.00	1.61	0.22	1.75	0.89
2	DB411243F-250	400 kcmil	400 Navy	1/2	3.01	1.39	0.18	1.75	0.86
3	DB411243F-260	400 kcmil	400 Navy	1/2	2.83	1.38	0.19	1.75	0.86
4	DB413801F	400 kcmil	400 Navy	3/8	1.93	1.41	0.17	1.00	0.88
5	DB413801F-250	400 kcmil	400 Navy	3/8	1.82	1.39	0.18	1.00	0.86
6	DB413801F-260	400 kcmil	400 Navy	3/8	1.83	1.40	0.19	1.00	0.86
7	DB413861F	400 kcmil	400 Navy	3/8	1.93	1.41	0.17	1.06	0.88
8	DB413861F-260	400 kcmil	400 Navy	3/8	1.89	1.40	0.19	1.06	0.86
9	LB411243F	400 kcmil	400 Navy	1/2	3.00	1.41	0.17	1.75	0.88
10	LB411243F-250	400 kcmil	400 Navy	1/2	3.01	1.39	0.18	1.75	0.86
11	LB411243F-260	400 kcmil	400 Navy	1/2	2.83	1.38	0.19	1.75	0.86
12	LB411243FP-250	400 kcmil	400 Navy	1/2	3.01	1.28	0.17	1.75	0.86
13	LB411243FP-260	400 kcmil	400 Navy	1/2	2.83	1.40	0.19	1.75	0.86
14	LB411434F	400 kcmil	400 Navy	1/4	1.93	1.41	0.17	0.75	0.88
15	LB411434F-250	400 kcmil	400 Navy	1/4	1.34	1.39	0.18	0.75	0.86
16	LB411434FP-250	400 kcmil	400 Navy	1/4	1.34	1.39	0.18	0.75	0.86
17	LB413801F	400 kcmil	400 Navy	3/8	1.93	1.41	0.17	1.00	0.88
18	LB413801F-250	400 kcmil	400 Navy	3/8	1.82	1.39	0.18	1.00	0.86
19	LB413801F-260	400 kcmil	400 Navy	3/8	1.83	1.38	0.19	1.00	0.86
20	LB413801FP-250	400 kcmil	400 Navy	3/8	1.82	1.39	0.18	1.00	0.86
21	LB413801FP-260	400 kcmil	400 Navy	3/8	1.83	1.40	0.19	1.00	0.86
22	WP41243F-035	400 kcmil	400 Navy	1/2	2.87	1.55	0.23	1.75	0.94

450 kcmil

Compression Connectors / Two hole 45°

450 kcmil

Compression Connectors / Two hole 45° / 450 kcmil

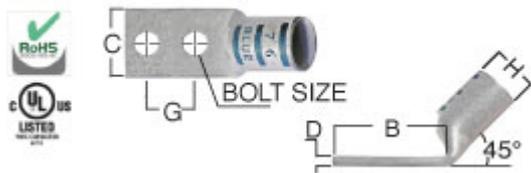

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Brown	-
Panduit	CT-920 CT-930	Brown	P87
Burndy	Y35 Y45	Brown	20


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H	
1	DB451243F-251	450 kcmil	444.4 kcmil 450 kcmil 1100/24	1/2	3.01	1.70	0.26	1.75	1.06	
2	DB451243F-261	450 kcmil	444.4 kcmil 450 kcmil 1100/24	1/2	2.83	1.72	0.27	1.75	1.06	
3	DB453801F-251	450 kcmil	444.4 kcmil 450 kcmil 1100/24	3/8	1.82	1.70	0.26	1.00	1.06	
4	DB453801F-261	450 kcmil	444.4 kcmil 450 kcmil 1100/24	3/8	1.83	1.72	0.27	1.00	1.06	

500 kcmil

Compression Connectors / Two hole 45°

500 kcmil

Compression Connectors / Two hole 45° / 500 kcmil

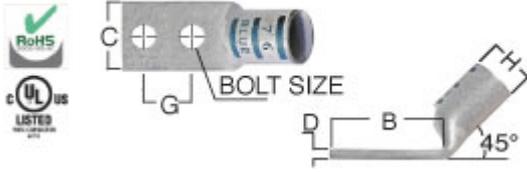


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB511241F-250	500 kcmil	500 Navy	1/2	2.37	1.54	0.22	1.25	0.95
2	DB511241F-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	2.51	1.89	0.26	1.25	1.17
3	DB511241F-260	500 kcmil	500 Navy	1/2	2.33	1.52	0.23	1.25	0.95
4	DB511241F-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	2.33	1.81	0.27	1.25	1.12
5	DB511243F	500 kcmil	500 Navy	1/2	3.00	1.61	0.22	1.75	0.99
6	DB511243F-250	500 kcmil	500 Navy	1/2	3.01	1.54	0.22	1.75	0.95
7	DB511243F-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	3.01	1.89	0.26	1.75	1.17
8	DB511243F-260	500 kcmil	500 Navy	1/2	2.83	1.52	0.23	1.75	0.95
9	DB511243F-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	2.83	1.81	0.27	1.75	1.12
10	DB511243F-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	2.83	1.63	0.27	1.75	1.12
11	DB511434F-250	500 kcmil	500 Navy	1/4	1.34	1.54	0.22	0.75	0.95
12	DB511434F-260	500 kcmil	500 Navy	1/4	1.39	1.52	0.23	0.75	0.95
13	DB513801F	500 kcmil	500 Navy	3/8	1.93	1.61	0.22	1.00	0.99
14	DB513801F-250	500 kcmil	500 Navy	3/8	1.82	1.54	0.22	1.00	0.95
15	DB513801F-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	1.82	1.89	0.26	1.00	1.17
16	DB513801F-260	500 kcmil	500 Navy	3/8	1.83	1.52	0.23	1.00	0.95
17	DB513801F-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	1.83	1.81	0.27	1.00	1.12
18	DB513801F-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	1.83	1.63	0.27	1.00	1.12
19	DB513801F-262	500 kcmil	500 Navy	3/8	1.83	1.55	0.23	1.00	0.95
20	DB515601F-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	5/16	1.75	1.89	0.26	1.00	1.17
21	DB515601F-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	5/16	1.70	1.84	0.27	1.00	1.12
22	LB511243F	500 kcmil	500 Navy	1/2	3.00	1.61	0.22	1.75	0.99
23	LB511243F-250	500 kcmil	500 Navy	1/2	3.01	1.54	0.22	1.75	0.95
24	LB511243F-260	500 kcmil	500 Navy	1/2	2.83	1.52	0.23	1.75	0.95
25	LB511243FP-250	500 kcmil	500 Navy	1/2	3.01	1.54	0.22	1.75	0.95
26	LB511243FP-260	500 kcmil	500 Navy	1/2	2.83	1.55	0.23	1.75	0.95
27	LB511243FP-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	2.83	1.81	0.27	1.75	1.12
28	LB511434F	500 kcmil	500 Navy	1/4	1.94	1.61	0.22	0.75	0.99
29	LB511434F-250	500 kcmil	500 Navy	1/4	1.34	1.54	0.22	0.75	0.95
30	LB511434F-260	500 kcmil	500 Navy	1/4	1.39	1.55	0.23	0.75	0.95

500 kcmil

Compression Connectors / Two hole 45° / 500 kcmil

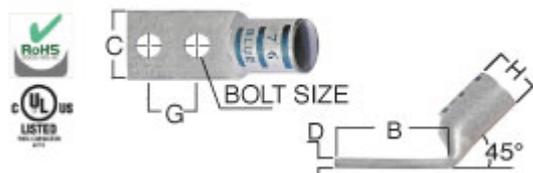

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20


#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB511434FP-250	500 kcmil	500 Navy	1/4	1.34	1.54	0.22	0.75	0.95
32	LB511434FP-260	500 kcmil	500 Navy	1/4	1.39	1.55	0.23	0.75	0.95
33	LB513801F	500 kcmil	500 Navy	3/8	1.93	1.61	0.22	1.00	0.99
34	LB513801F-250	500 kcmil	500 Navy	3/8	1.82	1.54	0.22	1.00	0.95
35	LB513801F-260	500 kcmil	500 Navy	3/8	1.83	1.55	0.23	1.00	0.95
36	LB513801FP	500 kcmil	500 Navy	3/8	1.93	1.61	0.22	1.00	0.99
37	LB513801FP-250	500 kcmil	500 Navy	3/8	1.82	1.54	0.22	1.00	0.95
38	LB513801FP-260	500 kcmil	500 Navy	3/8	1.83	1.55	0.23	1.00	0.95
39	LB513801FP-261	500 kcmil	500 Navy	3/8	1.83	1.72	0.27	1.00	1.09
40	LB513801FP-263	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	1.83	1.81	0.27	1.00	1.12
41	WP511243F-090	500 kcmil	500 Navy	1/2	2.79	1.55	0.23	1.75	0.96
42	WP513801F-068	500 kcmil	500 Navy	3/8	1.79	1.55	0.23	1.00	0.96

600 kcmil

Compression Connectors / Two hole 45°

600 kcmil

Compression Connectors / Two hole 45° / 600 kcmil

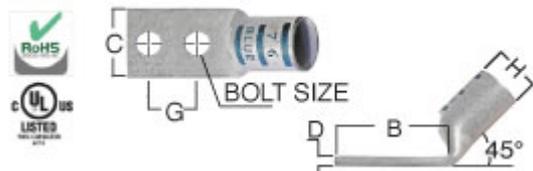

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14	Green	94
Panduit	CT-920 CT-980	Green	P94
Burndy	Y35 Y45	Green	22


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB611243F	600 kcmil	1100/24 = 444 kcmil	1/2	3.00	1.75	0.24	1.75	1.08
2	DB611243F-250	600 kcmil	1100/24 = 444 kcmil	1/2	3.01	1.70	0.26	1.75	1.06
3	DB611243F-251	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	3.01	1.89	0.26	1.75	1.17
4	DB611243F-260	600 kcmil	1100/24 = 444 kcmil	1/2	2.83	1.74	0.27	1.75	1.06
5	DB611243F-261	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	2.83	1.91	0.27	1.75	1.17
6	DB613801F	600 kcmil	1100/24 = 444 kcmil	3/8	1.93	1.75	0.24	1.00	1.08
7	DB613801F-250	600 kcmil	1100/24 = 444 kcmil	3/8	1.82	1.70	0.26	1.00	1.06
8	DB613801F-260	600 kcmil	1100/24 = 444 kcmil	3/8	1.83	1.73	0.27	1.00	1.06
9	DB651243F-251	-	646 kcmil 1600/24	1/2	3.01	1.95	0.30	1.75	1.20
10	DB651243F-261	-	646 kcmil 1600/24	1/2	2.83	1.95	0.30	1.75	1.20
11	DB653801F-251	-	646 kcmil 1600/24	3/8	2.06	1.95	0.30	1.00	1.20
12	DB653801F-261	-	646 kcmil 1600/24	3/8	1.83	1.98	0.30	1.00	1.20
13	LB611243F	600 kcmil	1100/24 = 444 kcmil	1/2	3.00	1.75	0.24	1.75	1.08
14	LB611243F-250	600 kcmil	1100/24 = 444 kcmil	1/2	3.01	1.70	0.26	1.75	1.06
15	LB611243F-260	600 kcmil	1100/24 = 444 kcmil	1/2	2.83	1.69	0.27	1.75	1.06
16	LB611243FP-250	600 kcmil	1100/24 = 444 kcmil	1/2	3.01	1.70	0.26	1.75	1.06
17	LB611243FP-260	600 kcmil	1100/24 = 444 kcmil	1/2	2.83	1.74	0.27	1.75	1.06
18	LB613801F	600 kcmil	1100/24 = 444 kcmil	3/8	2.80	1.75	0.24	1.00	1.08
19	LB613801F-250	600 kcmil	1100/24 = 444 kcmil	3/8	1.82	1.70	0.26	1.00	1.06
20	LB613801F-260	600 kcmil	1100/24 = 444 kcmil	3/8	1.83	1.74	0.26	1.00	1.06
21	LB613801FP-250	600 kcmil	1100/24 = 444 kcmil	3/8	1.82	1.70	0.26	1.00	1.06
22	LB613801FP-260	600 kcmil	1100/24 = 444 kcmil	3/8	2.08	1.74	0.26	1.00	1.06

700 kcmil

Compression Connectors / Two hole 45°

700 kcmil

Compression Connectors / Two hole 45° / 700 kcmil

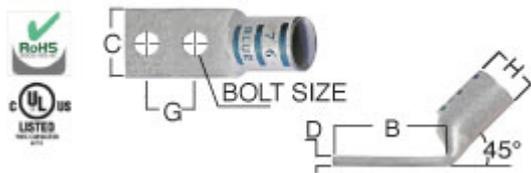

Installation Information

Manufacturer	Tools	Color	Code
T&B	40TON TBM8-750	Pink	99
Panduit	-	Pink	-
Burndy	Y39 Y644M	Pink	400


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB711221F-260	700 kcmil	1325/24 = 535 kcmil	1/2	2.58	1.81	0.27	1.50	1.11
2	DB711243F	700 kcmil	1325/24 = 535 kcmil	1/2	3.00	1.84	0.23	1.75	1.11
3	DB711243F-242	700 kcmil	1325/24 = 535 kcmil	1/2	3.00	1.80	0.28	1.75	1.11
4	DB711243F-260	700 kcmil	1325/24 = 535 kcmil	1/2	2.83	1.81	0.27	1.75	1.11
5	DB713801F-260	700 kcmil	1325/24 = 535 kcmil	3/8	1.83	1.81	0.27	1.00	1.11
6	DB713881F-260	700 kcmil	1325/24 = 535 kcmil	3/8	1.96	1.84	0.27	1.12	1.11
7	WP711243F-042	700 kcmil	1325/24 = 535 kcmil	1/2	2.80	1.79	0.27	1.75	1.09

750 kcmil

Compression Connectors / Two hole 45°

750 kcmil

Compression Connectors / Two hole 45° / 750 kcmil

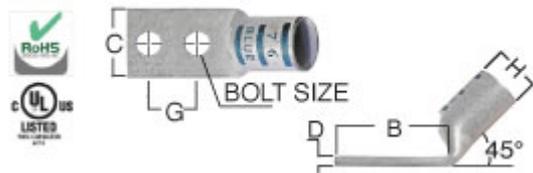

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24


#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB751221F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.69	2.17	0.32	1.50	1.34
2	DB751221F-260	750 kcmil	-	1/2	2.58	1.89	0.27	1.50	1.17
3	DB751221F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.58	2.19	0.33	1.50	1.34
4	DB751241F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.51	2.17	0.32	1.25	1.34
5	DB751241F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.33	2.19	0.33	1.25	1.34
6	DB751243F	750 kcmil	-	1/2	3.00	1.94	0.27	1.75	1.20
7	DB751243F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	3.01	2.17	0.32	1.75	1.34
8	DB751243F-260	750 kcmil	-	1/2	2.83	1.89	0.27	1.75	1.17
9	DB751243F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.83	2.19	0.33	1.75	1.34
10	DB753801F	750 kcmil	-	3/8	2.80	1.94	0.27	1.00	1.20
11	DB753801F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	2.06	2.17	0.32	1.00	1.34
12	DB753801F-260	750 kcmil	-	3/8	1.83	1.89	0.27	1.00	1.17
13	DB753801F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	1.83	2.19	0.33	1.00	1.34
14	DB753881F-260	750 kcmil	-	3/8	1.96	1.91	0.27	1.12	1.17
15	DB755821F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	3.00	2.17	0.32	1.50	1.34
16	DB755821F-260	750 kcmil	-	5/8	2.83	1.89	0.27	1.50	1.17
17	DB755821F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	2.83	2.19	0.33	1.50	1.34
18	LB751243F	750 kcmil	-	1/2	3.00	1.94	0.27	1.75	1.20
19	LB751243F-241	750 kcmil	1325/24 = 535 kcmil	1/2	3.00	1.94	0.27	1.75	1.20
20	LB751243F-260	750 kcmil	-	1/2	2.83	1.89	0.27	1.75	1.17
21	LB751243FP-260	750 kcmil	-	1/2	2.83	1.91	0.27	1.75	1.17
22	LB753801F	750 kcmil	-	3/8	2.06	1.94	0.27	1.00	1.20
23	LB753801F-260	750 kcmil	-	3/8	1.83	1.91	0.27	1.00	1.17
24	LB753801FP	750 kcmil	-	3/8	2.06	1.94	0.27	1.00	1.20
25	LB753801FP-260	750 kcmil	-	3/8	2.08	1.91	0.27	1.00	1.17
26	WP751243F-072	750 kcmil	-	1/2	2.78	1.90	0.27	1.75	1.17
27	WP753801F-175	750 kcmil	-	3/8	2.05	1.90	0.27	1.00	1.17

800 kcmil

Compression Connectors / Two hole 45°

800 kcmil

Compression Connectors / Two hole 45° / 800 kcmil

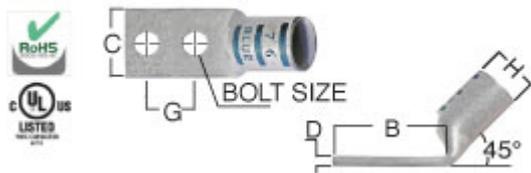

Installation Information

Manufacturer	Tools	Color	Code
T&B	15TON 40TON	Orange	107
Panduit	-	Orange	-
Burndy	Y35 Y46	Orange	25


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB811243F	800 kcmil	-	1/2	3.00	2.01	0.27	1.75	1.25
2	DB811243F-260	800 kcmil	-	1/2	2.83	1.89	0.30	1.75	1.25
3	DB813801F-260	800 kcmil	-	3/8	1.83	1.95	0.30	1.00	1.25
4	DB813881F-260	800 kcmil	-	3/8	1.96	1.98	0.30	1.12	1.25

900 kcmil

Compression Connectors / Two hole 45°

900 kcmil

Compression Connectors / Two hole 45° / 900 kcmil

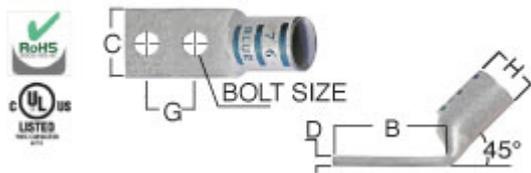

Installation Information

Manufacturer	Tools	Color	Code
T&B	12 TON 15TON	Yellow	115
Panduit	-	Yellow	-
Burndy	-	Yellow	-


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB911243F	900 kcmil	1925/24 = 777 kcmil	1/2	3.00	2.18	0.31	1.75	1.35
2	LB911243F	900 kcmil	1925/24 = 777 kcmil	1/2	3.00	2.18	0.31	1.75	1.35
3	WP911243F-049	900 kcmil	1925/24 = 777 kcmil	1/2	2.85	2.18	0.33	1.75	1.32

1000 kcmil

Compression Connectors / Two hole 45°

1000 kcmil

Compression Connectors / Two hole 45° / 1000 kcmil

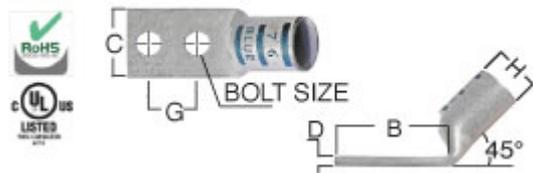

Installation Information

Manufacturer	Tools	Color	Code
T&B	14TON 15TON	White	125
Panduit	CT-920 CT-930	White	P125
Burndy	Y35 Y46	White	27


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB111241F-260	1000 kcmil	1000 Navy	1/2	2.33	2.19	0.33	1.25	1.34
2	DB111241F-262	1000 kcmil	1000 Navy	1/2	2.33	2.17	0.33	1.25	1.34
3	DB111243F	1000 kcmil	1000 Navy	1/2	3.00	2.27	0.30	1.75	1.40
4	DB111243F-260	1000 kcmil	1000 Navy	1/2	2.83	2.17	0.33	1.75	1.34
5	LB111243F	1000 kcmil	1000 Navy	1/2	3.00	2.27	0.30	1.75	1.40
6	LB111243F-260	1000 kcmil	1000 Navy	1/2	2.83	2.17	0.33	1.75	1.34
7	LB111243FP-260	1000 kcmil	1000 Navy	1/2	2.83	2.19	0.33	1.75	1.34
8	LB113801F	1000 kcmil	1000 Navy	3/8	2.80	2.27	0.30	1.00	1.40
9	LB113801F-260	1000 kcmil	1000 Navy	3/8	1.83	2.19	0.33	1.00	1.34
10	LB113801FP-260	1000 kcmil	1000 Navy	3/8	2.08	2.19	0.33	1.00	1.34

350 kcmil

Compression Connectors / Two hole 45°

350 kcmil

Compression Connectors / Two hole 45° / 350 kcmil

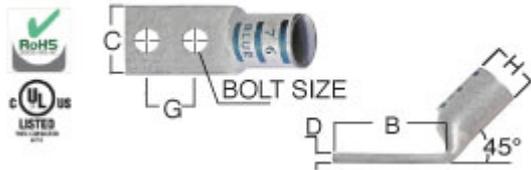

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

400 kcmil

Compression Connectors / Two hole 45°

400 kcmil

Compression Connectors / Two hole 45° / 400 kcmil

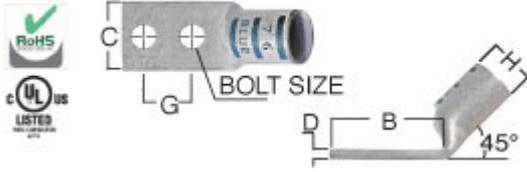

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

500 kcmil

Compression Connectors / Two hole 45°

500 kcmil

Compression Connectors / Two hole 45° / 500 kcmil

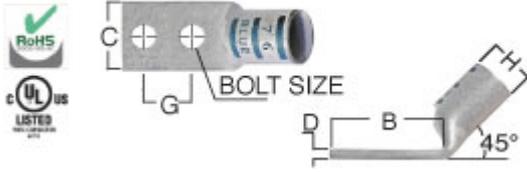

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

650 kcmil

Compression Connectors / Two hole 45°

650 kcmil

Compression Connectors / Two hole 45° / 650 kcmil

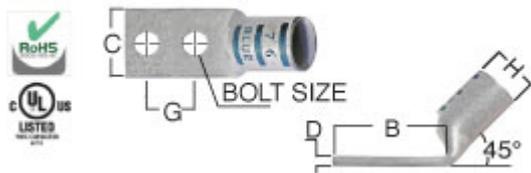

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Black	-
Panduit	CT-920 CT-930	Black	106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

750 kcmil

Compression Connectors / Two hole 45°

750 kcmil

Compression Connectors / Two hole 45° / 750 kcmil

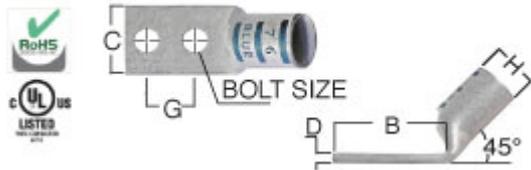

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

4/0 weld

Compression Connectors / Two hole 45°

4/0 weld

Compression Connectors / Two hole 45° / 4/0 weld

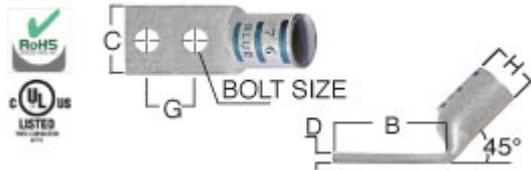

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

250 kcmil

Compression Connectors / Two hole 45°

250 kcmil

Compression Connectors / Two hole 45° / 250 kcmil

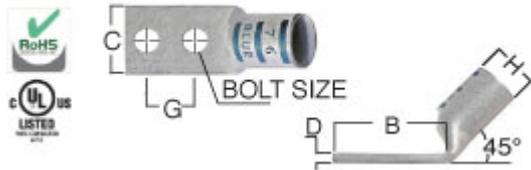

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H


No items in this section.

300 kcmil

Compression Connectors / Two hole 45°

300 kcmil

Compression Connectors / Two hole 45° / 300 kcmil

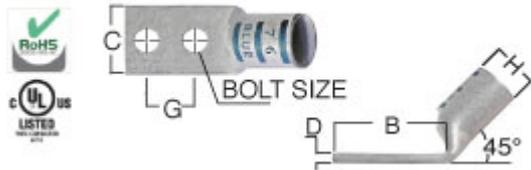

Installation Information

Manufacturer	Tools	Color	Code
-			

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H

No items in this section.