


2/0 AWG Catalog

Compression Connectors / One hole 90°

CATEGORY EDITION

2/0 AWG

Compression Connectors / One hole 90° / 2/0 AWG

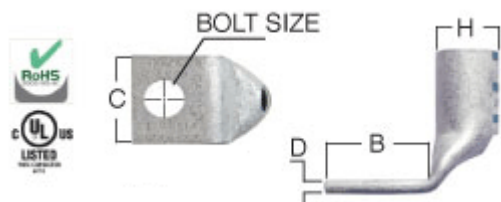


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA2010A-251	2/0 AWG	325/24 2/0 Weld	#10	0.54	0.96	0.13	0.51
2	DA2010A-261	2/0 AWG	325/24 2/0 Weld	#10	0.52	0.93	0.13	0.50
3	DA2012A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.25	0.83	0.13	0.44
4	DA2012A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.09	0.85	0.13	0.45
5	DA2012A-251	2/0 AWG	325/24 2/0 Weld	1/2	1.09	0.96	0.13	0.51
6	DA2012A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.09	0.85	0.13	0.45
7	DA2012A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.08	0.83	0.12	0.44
8	DA2012A-261	2/0 AWG	325/24 2/0 Weld	1/2	1.08	0.93	0.13	0.50
9	DA2014A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.65	0.83	0.13	0.44
10	DA2014A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.80	0.85	0.13	0.45
11	DA2014A-251	2/0 AWG	325/24 2/0 Weld	1/4	0.78	0.96	0.13	0.51
12	DA2014A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.78	0.85	0.13	0.45
13	DA2014A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.64	0.83	0.12	0.44
14	DA2014A-261	2/0 AWG	325/24 2/0 Weld	1/4	0.64	0.93	0.13	0.50
15	DA2034A-251	2/0 AWG	325/24 2/0 Weld	3/4	1.52	0.96	0.13	0.51
16	DA2034A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/4	1.52	0.96	0.12	0.44
17	DA2034A-261	2/0 AWG	325/24 2/0 Weld	3/4	1.52	1.10	0.11	0.50
18	DA2038A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.93	0.83	0.13	0.44
19	DA2038A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.84	0.85	0.13	0.45
20	DA2038A-251	2/0 AWG	325/24 2/0 Weld	3/8	0.84	0.96	0.13	0.51
21	DA2038A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.84	0.85	0.13	0.45
22	DA2038A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.83	0.83	0.12	0.44
23	DA2038A-261	2/0 AWG	325/24 2/0 Weld	3/8	0.83	0.93	0.13	0.50
24	DA2056A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.88	0.83	0.13	0.44
25	DA2056A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.78	0.85	0.13	0.45
26	DA2056A-251	2/0 AWG	325/24 2/0 Weld	5/16	0.78	0.96	0.13	0.51
27	DA2056A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.78	0.85	0.13	0.45
28	DA2056A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.70	0.83	0.12	0.44
29	DA2056A-261	2/0 AWG	325/24 2/0 Weld	5/16	0.70	0.93	0.13	0.50
30	DA2058A-251	2/0 AWG	325/24 2/0 Weld	5/8	1.33	0.96	0.13	0.51

2/0 AWG

Compression Connectors / One hole 90° / 2/0 AWG

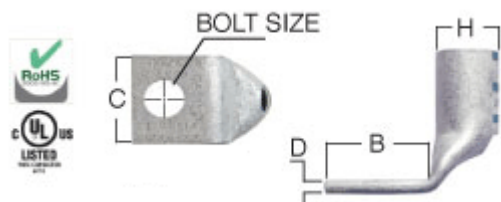

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
31	DA2058A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/8	1.33	0.88	0.11	0.44	
32	DA2058A-261	2/0 AWG	325/24 2/0 Weld	5/8	1.33	0.93	0.13	0.50	
33	LA2012A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.25	0.83	0.13	0.44	
34	LA2012A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.09	0.85	0.13	0.45	
35	LA2012A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.08	0.83	0.12	0.44	
36	LA2012AP-251	2/0 AWG	325/24 2/0 Weld	1/2	1.09	0.96	0.13	0.51	
37	LA2012AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.08	0.83	0.12	0.44	
38	LA2012AP-261	2/0 AWG	325/24 2/0 Weld	1/2	1.08	0.93	0.13	0.50	
39	LA2014AP-251	2/0 AWG	325/24 2/0 Weld	1/4	0.78	0.96	0.13	0.51	
40	LA2014AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.64	0.83	0.12	0.44	
41	LA2014AP-261	2/0 AWG	325/24 2/0 Weld	1/4	0.64	0.93	0.13	0.50	
42	LA2038A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.93	0.83	0.13	0.44	
43	LA2038A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.84	0.85	0.13	0.45	
44	LA2038A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.83	0.83	0.12	0.44	
45	LA2038AP-251	2/0 AWG	325/24 2/0 Weld	3/8	0.84	0.96	0.13	0.51	
46	LA2038AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.83	0.83	0.12	0.44	
47	LA2038AP-261	2/0 AWG	325/24 2/0 Weld	3/8	0.83	0.93	0.13	0.50	
48	WP2012A-146	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	0.81	0.83	0.12	0.44	
49	WP2038A-012	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.81	0.83	0.12	0.44	