


250 kcmil Catalog

Compression Connectors / One hole 90°

CATEGORY EDITION

250 kcmil

Compression Connectors / One hole 90° / 250 kcmil

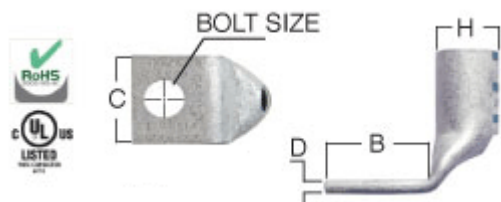


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA2512A	250 kcmil	250 Navy 262.6 kcmil	1/2	1.25	1.13	0.14	0.63
2	DA2512A-250	250 kcmil	250 Navy 262.6 kcmil	1/2	1.09	1.17	0.14	0.63
3	DA2512A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/2	1.12	1.28	0.17	0.70
4	DA2512A-252	250 kcmil	250 Navy 262.6 kcmil	1/2	1.09	1.17	0.14	0.63
5	DA2512A-260	250 kcmil	250 Navy 262.6 kcmil	1/2	1.08	1.11	0.16	0.61
6	DA2512A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/2	1.08	1.20	0.16	0.65
7	DA2512A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	1/2	1.08	1.29	0.18	0.70
8	DA2514-261	250 kcmil	250 kcmil 637/24 Class I,K,M	1/4	0.64	1.29	0.18	0.70
9	DA2514A-250	250 kcmil	250 Navy 262.6 kcmil	1/4	0.78	1.17	0.14	0.63
10	DA2514A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/4	0.78	1.28	0.17	0.70
11	DA2514A-252	250 kcmil	250 Navy 262.6 kcmil	1/4	0.78	1.17	0.14	0.63
12	DA2514A-260	250 kcmil	250 Navy 262.6 kcmil	1/4	0.64	1.11	0.16	0.61
13	DA2534A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/4	1.52	1.28	0.17	0.70
14	DA2534A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/4	1.52	1.20	0.16	0.65
15	DA2534A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/4	1.52	1.29	0.18	0.70
16	DA2538A	250 kcmil	250 Navy 262.6 kcmil	3/8	0.93	1.13	0.14	0.63
17	DA2538A-250	250 kcmil	250 Navy 262.6 kcmil	3/8	0.86	1.17	0.14	0.63
18	DA2538A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	1.01	1.28	0.17	0.70
19	DA2538A-252	250 kcmil	250 Navy 262.6 kcmil	3/8	0.86	1.17	0.14	0.63
20	DA2538A-260	250 kcmil	250 Navy 262.6 kcmil	3/8	0.83	1.11	0.16	0.61
21	DA2538A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	0.83	1.20	0.16	0.65
22	DA2538A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/8	0.83	1.29	0.18	0.70
23	DA2556A-250	250 kcmil	250 Navy 262.6 kcmil	5/16	0.79	1.17	0.14	0.63
24	DA2556A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/16	0.82	1.28	0.17	0.70
25	DA2556A-252	250 kcmil	250 Navy 262.6 kcmil	5/16	0.79	1.17	0.14	0.63
26	DA2556A-260	250 kcmil	250 Navy 262.6 kcmil	5/16	0.70	1.11	0.16	0.61
27	DA2556A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/16	0.70	1.20	0.16	0.65
28	DA2556A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	5/16	0.70	1.29	0.18	0.70
29	DA2558A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/8	1.33	1.28	0.17	0.70
30	DA2558A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/8	1.33	1.20	0.16	0.65

250 kcmil

Compression Connectors / One hole 90° / 250 kcmil

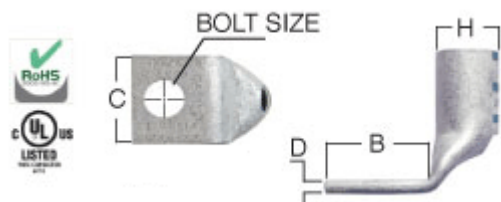

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
31	DA2558A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	5/8	1.33	1.29	0.18	0.70
32	DA2578A-260	250 kcmil	250 Navy 262.6 kcmil	7/8	1.77	1.11	0.14	0.61
33	LA2512A	250 kcmil	250 Navy 262.6 kcmil	1/2	1.25	1.13	0.14	0.63
34	LA2512A-250	250 kcmil	250 Navy 262.6 kcmil	1/2	1.09	1.17	0.14	0.63
35	LA2512A-260	250 kcmil	250 Navy 262.6 kcmil	1/2	1.08	1.11	0.16	0.61
36	LA2512AP-260	250 kcmil	250 Navy 262.6 kcmil	1/2	1.08	1.10	0.16	0.61
37	LA2538AP-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	1.01	1.28	0.17	0.70
38	LA2538AP-260	250 kcmil	250 Navy 262.6 kcmil	3/8	0.83	1.10	0.16	0.61
39	LA2538AP-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	0.83	1.20	0.16	0.65
40	LA2538AP-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/8	0.83	1.28	0.18	0.70
41	LA2578A-250	250 kcmil	250 Navy 262.6 kcmil	7/8	1.63	1.25	0.12	0.63
42	WP2512A-026	250 kcmil	250 Navy 262.6 kcmil	1/2	1.12	1.20	0.16	0.64
43	WP2538A-080	250 kcmil	250 Navy 262.6 kcmil	3/8	0.99	1.20	0.16	0.64
44	WP2538A-174	250 kcmil	250 Navy 262.6 kcmil	3/8	1.06	1.09	0.16	0.64