


700 kcmil Catalog

Compression Connectors / One hole 90°

CATEGORY EDITION

700 kcmil

Compression Connectors / One hole 90° / 700 kcmil

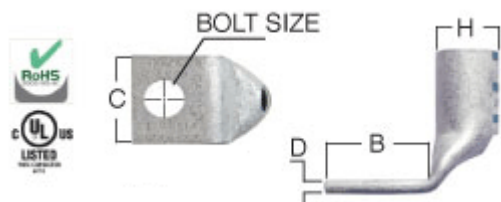

Installation Information

Manufacturer	Tools	Color	Code
T&B	40TON TBM8-750	Pink	99
Panduit	-	Pink	-
Burndy	Y39 Y644M	Pink	400

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
1	DA7112A-241	700 kcmil	1325/24 = 535 kcmil 427/.0342	1/2	1.69	1.81	0.28	0.97	
2	DA7158	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.58	1.84	0.23	0.97	
3	DA7158A-241	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.58	1.81	0.28	0.97	
4	DA7158A-260	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.33	1.84	0.27	0.97	
5	DA7512A-260	750 kcmil	1325/24 = 535 kcmil	1/2	1.08	1.91	0.27	1.03	
6	DA7541A-260	750 kcmil	1325/24 = 535 kcmil	1 1/4	2.50	1.91	0.27	1.03	
7	DA7558A	750 kcmil	1325/24 = 535 kcmil	5/8	1.58	1.94	0.27	1.06	
8	DA7558A-241	750 kcmil	1600/24 = 646 kcmil	5/8	1.58	1.94	0.27	1.06	
9	DA7558A-260	750 kcmil	1325/24 = 535 kcmil	5/8	1.33	1.91	0.27	1.03	
10	DA7578A-260	750 kcmil	1325/24 = 535 kcmil	7/8	1.77	1.91	0.27	1.03	
11	LA7512A	750 kcmil	1325/24 = 535 kcmil	1/2	1.25	1.94	0.27	1.06	
12	LA7512A-260	750 kcmil	1325/24 = 535 kcmil	1/2	1.08	1.89	0.27	1.03	
13	LA7512AP-260	750 kcmil	1325/24 = 535 kcmil	1/2	1.08	1.91	0.27	1.03	
14	LA7538AP-260	750 kcmil	1325/24 = 535 kcmil	3/8	0.83	1.91	0.27	1.03	
15	LA7558A	750 kcmil	1325/24 = 535 kcmil	5/8	1.58	1.94	0.27	1.06	
16	LA7558A-241	750 kcmil	1600/24 = 646 kcmil	5/8	1.58	1.94	0.27	1.06	
17	LA7558A-260	750 kcmil	1325/24 = 535 kcmil	5/8	1.33	1.89	0.27	1.03	
18	WP7112A-091	700 kcmil	1325/24 = 535 kcmil 427/.0342	1/2	1.69	1.79	0.27	0.95	
19	WP7158A-040	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.69	1.79	0.27	0.95	
20	WP7558A-023	750 kcmil	1325/24 = 535 kcmil	5/8	1.43	1.90	0.27	1.03	