


500 kcmil Catalog

Compression Connectors / One hole 90°

CATEGORY EDITION

500 kcmil

Compression Connectors / One hole 90° / 500 kcmil

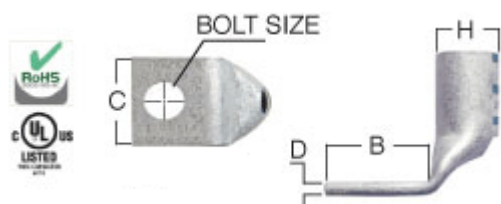

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Pink	-
Panduit	CT-920 CT-930	Pink	P99
Burndy	Y35 Y45	Pink	L99

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA5112A-251	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.89	0.26	0.63	1.03
2	DA5112A-261	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.08	1.84	0.27	0.98
3	DA5138A-251	-	535.3 kcmil 1325/24 500 kcmil	3/8	1.89	0.26	0.39	1.03
4	DA5138A-261	-	535.3 kcmil 1325/24 500 kcmil	3/8	0.83	1.84	0.27	0.98
5	DA5156A-251	-	535.3 kcmil 1325/24 500 kcmil	5/16	1.89	0.26	0.39	1.03
6	DA5156A-261	-	535.3 kcmil 1325/24 500 kcmil	5/16	0.70	1.84	0.27	0.98
7	DA5158A-241	-	1100/24 = 444 kcmil 500 Weld 59/.0417 427/.0325 703/.0253	5/8	1.58	1.75	0.24	0.96
8	DA5158A-251	-	535.3 kcmil 1325/24 500 kcmil	5/8	1.89	0.26	0.88	1.03
9	DA5158A-261	-	535.3 kcmil 1325/24 500 kcmil	5/8	1.33	1.84	0.27	0.98
10	LA5112AP-251	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.38	1.89	0.26	1.03
11	LA5112AP-261	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.08	1.81	0.27	0.98
12	LA5138AP-251	-	535.3 kcmil 1325/24 500 kcmil	3/8	1.16	1.89	0.26	1.03
13	LA5138AP-261	-	535.3 kcmil 1325/24 500 kcmil	3/8	0.83	1.81	0.27	0.98