


300 kcmil Catalog

Compression Connectors / One hole 90°

CATEGORY EDITION

300 kcmil

Compression Connectors / One hole 90° / 300 kcmil

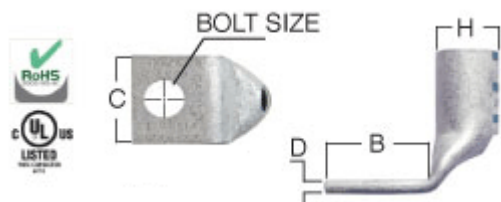

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-980	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA3112A-241	-	300 Weld 259/.034 427/.0265 889/.0183 775/24 = 313 kcmil	1/2	1.25	1.36	0.18	0.75
2	DA3512A-241	-	350 Weld 259/.0368 427/.0285 703/.0224 889/.0201 373.7 kcmil	1/2	1.25	1.61	0.22	0.79
3	DA3512A-251	-	925/24 350 kcmil	1/2	1.17	1.54	0.22	0.84
4	DA3512A-261	-	925/24 350 kcmil	1/2	1.08	1.55	0.23	0.83
5	DA3538A-251	-	925/24 350 kcmil	3/8	1.01	1.54	0.22	0.84
6	DA3538A-261	-	925/24 350 kcmil	3/8	0.83	1.55	0.23	0.83
7	DA3556A-251	-	925/24 350 kcmil	5/16	0.82	1.54	0.22	0.84
8	DA3556A-261	-	925/24 350 kcmil	5/16	0.70	1.55	0.23	0.83
9	DA3558A-251	-	925/24 350 kcmil	5/8	1.38	1.54	0.22	0.84
10	DA3558A-261	-	925/24 350 kcmil	5/8	1.33	1.55	0.23	0.83
11	LA3512AP-251	-	925/24 350 kcmil	1/2	1.17	1.54	0.22	0.84
12	LA3512AP-261	-	925/24 350 kcmil	1/2	1.08	1.52	0.23	0.83
13	LA3538AP-251	-	925/24 350 kcmil	3/8	1.01	1.54	0.22	0.84
14	LA3538AP-261	-	925/24 350 kcmil	3/8	0.83	1.52	0.23	0.83