


250 kcmil Catalog

Compression Connectors / Two hole 0°

CATEGORY EDITION

250 kcmil

Compression Connectors / Two hole 0° / 250 kcmil

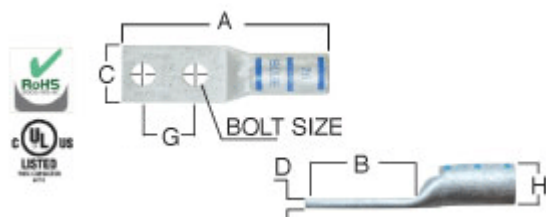


Installation Information

| Manufacturer | Tools | Color | Code |
|--------------|---------------|--------|------|
| T&B | TBM5 TBM8 | Yellow | 62 |
| Panduit | CT-720 CT-920 | Yellow | P62 |
| Burndy | MY29 Y644M | Yellow | 16 |

| # | Cat.No | Wire Size | | Dimension (in.) | | | | | | |
|----|---------------|-----------|---|-----------------|------|------|------|------|-------|------|
| | | Code | Flex Class G,H,I,K,M | Bolt Size | A | B | C | D | G | H |
| 1 | DB251241-251 | 250 kcmil | 262.6 kcmil | 1/2 | 3.75 | 2.66 | 1.28 | 0.17 | 1.25 | 0.79 |
| 2 | DB251241-261 | 250 kcmil | Class G 259 Str Class H 427 Str | 1/2 | 3.74 | 2.33 | 1.20 | 0.16 | 1.25 | 0.73 |
| 3 | DB251241-263 | - | 250 kcmil 637/24 Class I, K, M | 1/2 | 3.74 | 2.33 | 1.29 | 0.18 | 1.25 | 0.79 |
| 4 | DB251243 | 250 kcmil | 250 Navy | 1/2 | 4.21 | 2.81 | 1.13 | 0.18 | 1.75 | 0.70 |
| 5 | DB251243-241 | - | 4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306 | 1/2 | 4.21 | 2.81 | 0.94 | 0.14 | 1.75 | 0.75 |
| 6 | DB251243-250 | 250 kcmil | 250 Navy | 1/2 | 4.61 | 3.01 | 1.17 | 0.14 | 1.75 | 0.70 |
| 7 | DB251243-251 | 250 kcmil | 262.6 kcmil | 1/2 | 4.39 | 3.17 | 1.28 | 0.17 | 1.75 | 0.79 |
| 8 | DB251243-260 | 250 kcmil | 250 Navy | 1/2 | 4.24 | 2.83 | 1.11 | 0.16 | 1.75 | 0.68 |
| 9 | DB251243-261 | 250 kcmil | Class G 259 Str Class H 427 Str | 1/2 | 4.24 | 2.83 | 1.20 | 0.16 | 1.75 | 0.73 |
| 10 | DB251243-263 | - | 250 kcmil 637/24 Class I, K, M | 1/2 | 4.24 | 2.83 | 1.29 | 0.18 | 1.75 | 0.79 |
| 11 | DB253801 | 250 kcmil | 250 Navy | 3/8 | 3.33 | 1.93 | 1.13 | 0.14 | 1.00 | 0.70 |
| 12 | DB253801-241 | - | 4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306 | 3/8 | 4.20 | 2.80 | 1.25 | 0.15 | 1.00 | 0.75 |
| 13 | DB253801-250 | 250 kcmil | 250 Navy | 3/8 | 3.46 | 1.86 | 1.17 | 0.14 | 1.00 | 0.70 |
| 14 | DB253801-251 | 250 kcmil | 262.6 kcmil | 3/8 | 3.20 | 2.23 | 1.28 | 0.17 | 1.00 | 0.79 |
| 15 | DB253801-260 | 250 kcmil | 250 Navy | 3/8 | 3.24 | 1.83 | 1.11 | 0.16 | 1.00 | 0.68 |
| 16 | DB253801-261 | 250 kcmil | Class G 259 Str Class H 427 Str | 3/8 | 3.24 | 1.83 | 1.20 | 0.16 | 1.00 | 0.73 |
| 17 | DB253801-263 | - | 250 kcmil 637/24 Class I, K, M | 3/8 | 3.24 | 1.83 | 1.29 | 0.18 | 1.00 | 0.79 |
| 18 | DB253843-251 | 250 kcmil | 262.6 kcmil | 3/8 | 3.95 | 2.98 | 1.28 | 0.17 | 1.75 | 0.79 |
| 19 | DB253843-261 | - | 250 kcmil 637/24 Class I, K, M | 3/8 | 3.99 | 2.58 | 1.29 | 0.18 | 1.75 | 0.79 |
| 20 | DB253878-241 | - | 4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306 | 3/8 | 3.09 | 1.69 | 1.25 | 0.15 | 0.875 | 0.75 |
| 21 | DB253878-243 | - | 4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306 | 3/8 | 3.28 | 1.88 | 1.25 | 0.16 | 0.88 | 0.75 |
| 22 | LB251201-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.05 | 2.09 | 1.17 | 0.14 | 1.00 | 0.70 |
| 23 | LB251201P-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.05 | 2.09 | 1.17 | 0.14 | 1.00 | 0.70 |
| 24 | LB251243 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.95 | 3.00 | 1.13 | 0.14 | 1.75 | 0.70 |
| 25 | LB251243-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.97 | 3.01 | 1.17 | 0.14 | 1.75 | 0.70 |
| 26 | LB251243-260 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.80 | 2.83 | 1.11 | 0.16 | 1.75 | 0.68 |
| 27 | LB251243P-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.97 | 3.01 | 1.17 | 0.14 | 1.75 | 0.70 |
| 28 | LB251243P-260 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 1/2 | 4.80 | 2.83 | 1.10 | 0.16 | 1.75 | 0.68 |
| 29 | LB251434P-251 | 250 kcmil | 262.6 kcmil | 1/4 | 3.93 | 1.34 | 1.28 | 0.17 | 0.75 | 0.79 |
| 30 | LB251434P-261 | - | 250 kcmil 637/24 Class I, K, M | 1/40 | 3.74 | 1.39 | 1.29 | 0.18 | 0.75 | 0.76 |

250 kcmil

Compression Connectors / Two hole 0° / 250 kcmil

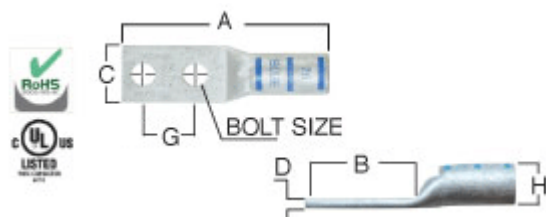

Installation Information

| Manufacturer | Tools | Color | Code |
|--------------|---------------|--------|------|
| T&B | TBM5 TBM8 | Yellow | 62 |
| Panduit | CT-720 CT-920 | Yellow | P62 |
| Burndy | MY29 Y644M | Yellow | 16 |

| # | Cat.No | Wire Size | | | Dimension (in.) | | | | | |
|----|---------------|-----------|---------------------------------|-----------|-----------------|------|------|------|------|------|
| | | Code | Flex Class G,H,I,K,M | Bolt Size | A | B | C | D | G | H |
| 31 | LB253801 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 3/8 | 3.88 | 1.93 | 1.13 | 0.14 | 1.00 | 0.70 |
| 32 | LB253801-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 3/8 | 3.82 | 1.86 | 1.17 | 0.14 | 1.00 | 0.70 |
| 33 | LB253801-260 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 3/8 | 3.80 | 1.83 | 1.10 | 0.16 | 1.00 | 0.68 |
| 34 | LB253801P | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 3/8 | 3.88 | 1.93 | 1.13 | 0.14 | 1.00 | 0.70 |
| 35 | LB253801P-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 3/8 | 3.82 | 1.86 | 1.17 | 0.14 | 1.00 | 0.70 |
| 36 | LB253801P-251 | 250 kcmil | 262.6 kcmil | 3/8 | 4.41 | 1.82 | 1.28 | 0.17 | 1.00 | 0.79 |
| 37 | LB253801P-260 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 3/8 | 3.80 | 1.83 | 1.10 | 0.14 | 1.00 | 0.68 |
| 38 | LB253801P-261 | 250 kcmil | Class G 259 Str Class H 427 Str | 3/8 | 4.18 | 1.83 | 1.20 | 0.16 | 1.00 | 0.73 |
| 39 | LB253801P-263 | - | 250 kcmil 637/24 Class I, K, M | 3/8 | 4.18 | 1.83 | 1.28 | 0.18 | 1.00 | 0.79 |
| 40 | LB255601P-250 | 250 kcmil | 550/24 = 222 kcmil 4/0 Weld | 5/16 | 3.75 | 1.79 | 1.17 | 0.14 | 1.00 | 0.70 |
| 41 | WP251201-159 | 250 kcmil | 250 Navy | 1/2 | 3.44 | 2.06 | 1.20 | 0.16 | 1.00 | 0.72 |
| 42 | WP251243-160 | 250 kcmil | 250 Navy | 1/2 | 3.94 | 2.56 | 1.20 | 0.16 | 1.75 | 0.72 |
| 43 | WP253801-027 | 250 kcmil | 250 Navy | 3/8 | 3.19 | 1.81 | 1.20 | 0.16 | 1.00 | 0.72 |
| 44 | WP255601-158 | 250 kcmil | 250 Navy | 5/16 | 3.19 | 1.81 | 1.20 | 0.16 | 1.00 | 0.72 |