


750 kcmil Catalog

Compression Connectors / Two hole 0°

CATEGORY EDITION

750 kcmil

Compression Connectors / Two hole 0° / 750 kcmil

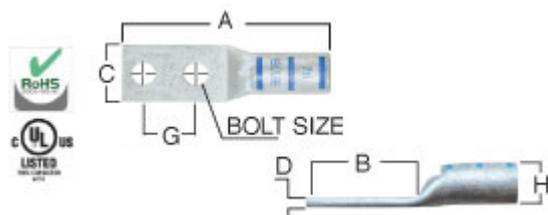


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB751221-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	5.05	2.69	2.17	0.32	1.50	1.34
2	DB751221-260	750 kcmil	-	1/2	4.70	2.58	1.89	0.27	1.50	1.17
3	DB751221-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	4.93	2.58	2.19	0.33	1.50	1.34
4	DB751241-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	4.87	3.22	2.17	0.32	1.25	1.34
5	DB751241-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	4.68	2.33	2.19	0.33	1.25	1.34
6	DB751243	750 kcmil	-	1/2	5.23	3.00	1.94	0.27	1.75	1.20
7	DB751243-250	750 kcmil	-	1/2	5.59	3.01	1.89	0.26	1.75	1.17
8	DB751243-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	5.37	3.72	2.17	0.32	1.75	1.34
9	DB751243-260	750 kcmil	-	1/2	4.95	2.83	1.89	0.27	1.75	1.17
10	DB751243-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	5.18	2.83	2.19	0.33	1.75	1.34
11	DB753801	750 kcmil	-	3/8	5.03	2.80	1.94	0.27	1.00	1.20
12	DB753801-250	750 kcmil	-	3/8	4.64	2.06	1.89	0.26	1.00	1.17
13	DB753801-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	4.42	2.90	2.17	0.32	1.00	1.34
14	DB753801-260	750 kcmil	-	3/8	3.95	1.83	1.89	0.27	1.00	1.17
15	DB753801-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	4.18	1.83	2.19	0.33	1.00	1.34
16	DB753881-260	750 kcmil	-	3/8	4.075	1.96	1.91	0.27	1.13	1.17
17	DB755821-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	5.36	3.71	2.17	0.32	1.50	1.34
18	DB755821-260	750 kcmil	-	5/8	4.95	2.83	1.89	0.27	1.50	1.17
19	DB755821-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	5.18	2.83	2.19	0.33	1.50	1.34
20	LB751243	750 kcmil	-	1/2	6.10	3.00	1.94	0.27	1.75	1.20
21	LB751243-241	-	1600/24 = 646 kcmil	1/2	6.10	3.00	1.94	0.27	1.75	1.20
22	LB751243-250	750 kcmil	-	1/2	6.58	3.01	1.89	0.26	1.75	1.17
23	LB751243-260	750 kcmil	-	1/2	6.41	2.83	1.89	0.27	1.75	1.17
24	LB751243P-250	750 kcmil	-	1/2	6.59	3.01	1.89	0.26	1.75	1.17
25	LB751243P-260	750 kcmil	-	1/2	6.41	2.83	1.91	0.27	1.75	1.17
26	LB753801	750 kcmil	-	3/8	5.16	2.06	1.94	0.27	1.00	1.20
27	LB753801-250	750 kcmil	-	3/8	5.63	2.06	1.89	0.26	1.00	1.17
28	LB753801-260	750 kcmil	-	3/8	5.41	1.83	1.91	0.27	1.00	1.17
29	LB753801P	750 kcmil	-	3/8	5.16	2.06	1.94	0.27	1.00	1.20
30	LB753801P-250	750 kcmil	-	3/8	5.64	2.06	1.89	0.26	1.00	1.17

750 kcmil

Compression Connectors / Two hole 0° / 750 kcmil

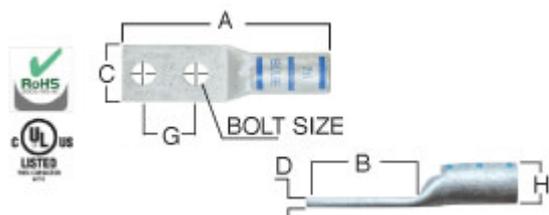

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB753801P-260	750 kcmil	-	3/8	5.66	2.08	1.91	0.27	1.00	1.17
32	WP751243-065	750 kcmil	-	1/2	5.39	2.78	1.90	0.27	1.75	1.17
33	WP751243-191	750 kcmil	-	1/2	5.39	2.78	1.90	0.27	1.75	1.17
34	WP753801-135	750 kcmil	-	3/8	5.39	2.05	1.90	0.27	1.00	1.17