


750 kcmil Catalog

Compression Connectors / Two hole 45°

CATEGORY EDITION

750 kcmil

Compression Connectors / Two hole 45° / 750 kcmil

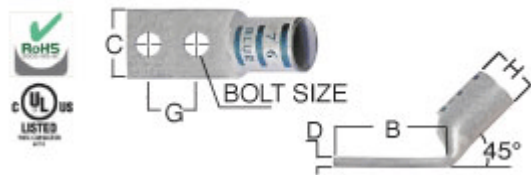

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB751221F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.69	2.17	0.32	1.50	1.34
2	DB751221F-260	750 kcmil	-	1/2	2.58	1.89	0.27	1.50	1.17
3	DB751221F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.58	2.19	0.33	1.50	1.34
4	DB751241F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.51	2.17	0.32	1.25	1.34
5	DB751241F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.33	2.19	0.33	1.25	1.34
6	DB751243F	750 kcmil	-	1/2	3.00	1.94	0.27	1.75	1.20
7	DB751243F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	3.01	2.17	0.32	1.75	1.34
8	DB751243F-260	750 kcmil	-	1/2	2.83	1.89	0.27	1.75	1.17
9	DB751243F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	2.83	2.19	0.33	1.75	1.34
10	DB753801F	750 kcmil	-	3/8	2.80	1.94	0.27	1.00	1.20
11	DB753801F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	2.06	2.17	0.32	1.00	1.34
12	DB753801F-260	750 kcmil	-	3/8	1.83	1.89	0.27	1.00	1.17
13	DB753801F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	1.83	2.19	0.33	1.00	1.34
14	DB753881F-260	750 kcmil	-	3/8	1.96	1.91	0.27	1.12	1.17
15	DB755821F-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	3.00	2.17	0.32	1.50	1.34
16	DB755821F-260	750 kcmil	-	5/8	2.83	1.89	0.27	1.50	1.17
17	DB755821F-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	2.83	2.19	0.33	1.50	1.34
18	LB751243F	750 kcmil	-	1/2	3.00	1.94	0.27	1.75	1.20
19	LB751243F-241	750 kcmil	1325/24 = 535 kcmil	1/2	3.00	1.94	0.27	1.75	1.20
20	LB751243F-260	750 kcmil	-	1/2	2.83	1.89	0.27	1.75	1.17
21	LB751243FP-260	750 kcmil	-	1/2	2.83	1.91	0.27	1.75	1.17
22	LB753801F	750 kcmil	-	3/8	2.06	1.94	0.27	1.00	1.20
23	LB753801F-260	750 kcmil	-	3/8	1.83	1.91	0.27	1.00	1.17
24	LB753801FP	750 kcmil	-	3/8	2.06	1.94	0.27	1.00	1.20
25	LB753801FP-260	750 kcmil	-	3/8	2.08	1.91	0.27	1.00	1.17
26	WP751243F-072	750 kcmil	-	1/2	2.78	1.90	0.27	1.75	1.17
27	WP753801F-175	750 kcmil	-	3/8	2.05	1.90	0.27	1.00	1.17