


250 kcmil Catalog

Compression Connectors / Two hole 90°

CATEGORY EDITION

250 kcmil

Compression Connectors / Two hole 90° / 250 kcmil

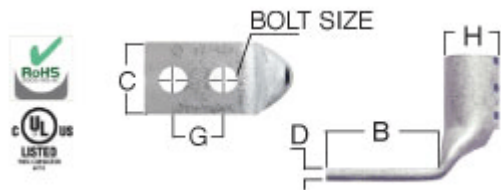


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB251241A-251	250 kcmil	262.6 kcmil	1/2	2.37	1.28	0.17	1.25	0.79
2	DB251241A-261	250 kcmil	Class G 259 Str Class H 427 Str	1/2	2.33	1.20	0.16	1.25	0.73
3	DB251241A-263	-	250 kcmil 637/24 Class I, K, M	1/2	2.33	1.29	0.18	1.25	0.79
4	DB251243A	250 kcmil	250 Navy	1/2	2.81	1.13	0.18	1.75	0.71
5	DB251243A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.018	1/2	2.81	0.94	0.14	1.75	0.75
6	DB251243A-250	250 kcmil	250 Navy	1/2	3.00	1.17	0.14	1.75	0.70
7	DB251243A-251	250 kcmil	262.6 kcmil	1/2	3.00	1.28	0.17	1.75	0.79
8	DB251243A-260	250 kcmil	250 Navy	1/2	2.83	1.11	0.16	1.75	0.68
9	DB251243A-261	250 kcmil	Class G 259 Str Class H 427 Str	1/2	2.83	1.20	0.16	1.75	0.73
10	DB251243A-263	-	250 kcmil 637/24 Class I, K, M	1/2	2.83	1.29	0.18	1.75	0.79
11	DB253801A	250 kcmil	250 Navy	3/8	1.93	1.13	0.14	1.00	0.71
12	DB253801A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.018	3/8	2.80	1.25	0.15	1.00	0.75
13	DB253801A-250	250 kcmil	250 Navy	3/8	1.86	1.17	0.14	1.00	0.70
14	DB253801A-251	250 kcmil	262.6 kcmil	3/8	1.82	1.28	0.17	1.00	0.79
15	DB253801A-260	250 kcmil	250 Navy	3/8	1.83	1.11	0.16	1.00	0.68
16	DB253801A-261	250 kcmil	Class G 259 Str Class H 427 Str	3/8	1.83	1.20	0.16	1.00	0.73
17	DB253801A-263	-	250 kcmil 637/24 Class I, K, M	3/8	1.83	1.29	0.18	1.00	0.79
18	DB253843A-251	250 kcmil	262.6 kcmil	3/8	2.57	1.28	0.17	1.75	0.79
19	DB253843A-261	-	250 kcmil 637/24 Class I, K, M	3/8	2.58	1.29	0.18	1.75	0.79
20	LB251201A-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.09	1.17	0.14	1.00	0.70
21	LB251201AP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.09	1.17	0.14	1.00	0.70
22	LB251243A	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	3.00	1.13	0.14	1.75	0.70
23	LB251243A-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	3.00	1.17	0.14	1.75	0.70
24	LB251243A-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.83	1.11	0.16	1.75	0.68
25	LB251243AP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	3.00	1.17	0.14	1.75	0.70
26	LB251243AP-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	1/2	2.83	1.10	0.16	1.75	0.68
27	LB251434AP-251	250 kcmil	262.6 kcmil	1/4	1.34	1.28	0.17	0.75	0.79
28	LB251434AP-261	-	250 kcmil 637/24 Class I, K, M	1/4	1.39	1.29	0.18	0.75	0.76
29	LB253801A	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.93	1.13	0.14	1.00	0.70
30	LB253801A-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.86	1.17	0.14	1.00	0.70

250 kcmil

Compression Connectors / Two hole 90° / 250 kcmil

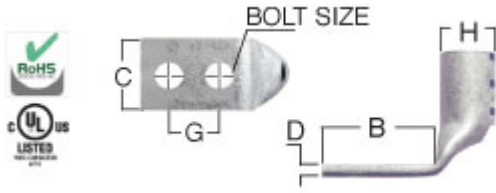

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB253801A-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.83	1.10	0.16	1.00	0.68
32	LB253801AP	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.93	1.13	0.14	1.00	0.70
33	LB253801AP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.86	1.17	0.14	1.00	0.70
34	LB253801AP-251	250 kcmil	262.6 kcmil	3/8	1.82	1.28	0.17	1.00	0.79
35	LB253801AP-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	1.83	1.10	0.14	1.00	0.68
36	LB253801AP-261	250 kcmil	Class G 259 Str Class H 427 Str	3/8	1.83	1.20	0.16	1.00	0.73
37	LB253801AP-263	-	250 kcmil 637/24 Class I, K, M	3/8	1.83	1.28	0.18	1.00	0.79
38	LB255601AP-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	5/16	1.79	1.17	0.14	1.00	0.70
39	WP253801A-177	250 kcmil	250 Navy	3/8	1.82	1.20	0.16	1.00	0.72