

One hole 90° Catalog

Compression Connectors

CATEGORY EDITION

Table of Contents

Catalog structure and section page index


#14-#10	3
#8 AWG	5
#6 AWG	8
#4 AWG	11
#2 AWG	14
#1 AWG	17
1/0 AWG	20
2/0 AWG	23
3/0 AWG	26
4/0 AWG	29
250 kcmil	32
300 kcmil	35
350 kcmil	37
400 kcmil	39
450 kcmil	41
500 kcmil	43
600 kcmil	45
700 kcmil	47
750 kcmil	49
800 kcmil	51
900 kcmil	53
1000 kcmil	55
350 kcmil	57
400 kcmil	59
500 kcmil	61
650 kcmil	63
750 kcmil	65
4/0 weld	67
250 kcmil	69
300 kcmil	71

#14-#10

Compression Connectors / One hole 90°

#14-#10

Compression Connectors / One hole 90° / #14-#10

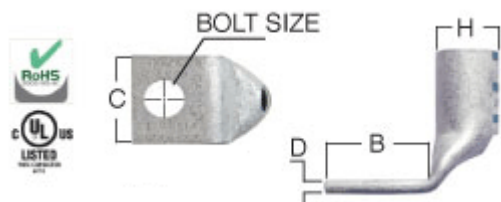

Installation Information

Manufacturer	Tools	Color	Code
T&B	ERG2002	--	-
Panduit	CT-100	--	-
Burndy	Y8MRB-1	--	-


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA1410A-260	14-10 AWG	-	8-10	0.52	0.38	0.058	0.13
2	DA1414A-250	14-10 AWG	-	1/4	0.62	0.42	0.05	0.13
3	DA1414A-260	14-10 AWG	-	1/4	0.64	0.47	0.05	0.13
4	WP1410A-096	14-10 AWG	-	8-10	0.65	0.36	0.07	0.13
5	WP1414A-097	14-10 AWG	-	1/4	0.65	0.41	0.06	0.13

#8 AWG

Compression Connectors / One hole 90°

#8 AWG

Compression Connectors / One hole 90° / #8 AWG

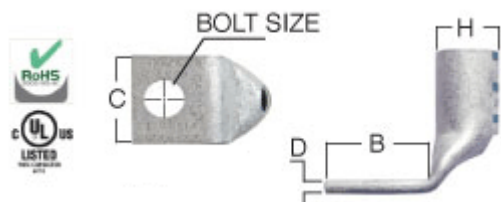


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49

#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA0810A	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.50	0.39	0.08	0.18
2	DA0810A-250	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.53	0.41	0.08	0.18
3	DA0810A-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.53	0.41	0.08	0.18
4	DA0810A-252	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.53	0.41	0.08	0.18
5	DA0810A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	8-10	0.52	0.41	0.08	0.18
6	DA0810A-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	8-10	0.52	0.41	0.08	0.18
7	DA0812A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/2	1.08	0.71	0.50	0.18
8	DA0812A-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/2	1.08	0.71	0.08	0.18
9	DA0814A	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.61	0.45	0.07	0.18
10	DA0814A-250	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.62	0.48	0.07	0.18
11	DA0814A-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.62	0.48	0.07	0.18
12	DA0814A-252	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.62	0.48	0.07	0.18
13	DA0814A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.64	0.44	0.08	0.18
14	DA0814A-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.64	0.44	0.08	0.18
15	DA0838A	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.64	0.56	0.05	0.18
16	DA0838A-250	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.84	0.60	0.05	0.18
17	DA0838A-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.84	0.60	0.05	0.18
18	DA0838A-252	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.84	0.60	0.05	0.18
19	DA0838A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.83	0.58	0.06	0.18
20	DA0838A-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.83	0.58	0.08	0.18
21	DA0856A	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	5/16	0.64	0.56	0.05	0.18
22	DA0856A-250	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	5/16	0.74	0.56	0.05	0.18
23	DA0856A-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	5/16	0.74	0.56	0.05	0.18
24	DA0856A-252	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	5/16	0.74	0.56	0.05	0.18
25	DA0856A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	5/16	0.70	0.52	0.06	0.18
26	DA0856A-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	5/16	0.70	0.52	0.08	0.18
27	LA0810A	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.65	0.42	0.08	0.18
28	LA0810A-250	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.53	0.41	0.08	0.18
29	LA0810A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.52	0.38	0.08	0.18
30	LA0810AP-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.53	0.41	0.08	0.18

#8 AWG

Compression Connectors / One hole 90° / #8 AWG

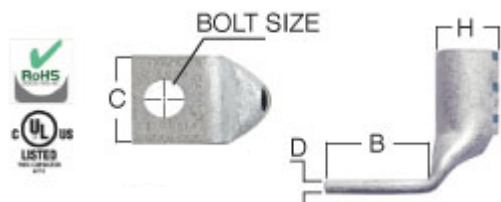

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
31	LA0810AP-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.52	0.41	0.08	0.18	
32	LA0810AP-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	#10	0.52	0.41	0.08	0.18	
33	LA0814A	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.65	0.42	0.08	0.18	
34	LA0814A-250	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.62	0.48	0.07	0.18	
35	LA0814A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.64	0.41	0.08	0.18	
36	LA0814AP-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.62	0.48	0.07	0.18	
37	LA0814AP-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.64	0.44	0.08	0.18	
38	LA0814AP-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.64	0.44	0.08	0.18	
39	LA0838A-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.83	0.58	0.06	0.18	
40	LA0838AP-251	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.84	0.60	0.05	0.18	
41	LA0838AP-260	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.83	0.58	0.06	0.18	
42	LA0838AP-261	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	3/8	0.83	0.58	0.06	0.18	
43	WP0814A-104	8 AWG	23 Navy #8 Weld 37/24 = 14.9 kcmil #6 SOL	1/4	0.49	0.41	0.08	0.18	

#6 AWG

Compression Connectors / One hole 90°

#6 AWG

Compression Connectors / One hole 90° / #6 AWG

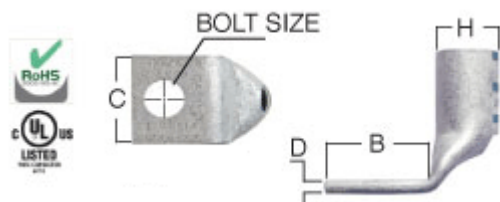


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
1	DA0610A	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.53	0.44	0.07	0.22	
2	DA0610A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.53	0.45	0.09	0.22	
3	DA0610A-251	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.53	0.45	0.09	0.22	
4	DA0610A-252	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.53	0.45	0.09	0.22	
5	DA0610A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	8-10	0.52	0.42	0.09	0.22	
6	DA0610A-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	8-10	0.52	0.48	0.08	0.22	
7	DA0612A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/2	1.08	0.75	0.12	0.22	
8	DA0612A-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/2	1.08	0.75	0.12	0.22	
9	DA0614A	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.53	0.44	0.07	0.22	
10	DA0614A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.62	0.48	0.08	0.22	
11	DA0614A-251	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.62	0.48	0.08	0.22	
12	DA0614A-252	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.62	0.48	0.08	0.22	
13	DA0614A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.64	0.45	0.08	0.22	
14	DA0614A-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.64	0.48	0.08	0.22	
15	DA0634A-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/4	1.52	1.05	0.13	0.22	
16	DA0638A	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.67	0.60	0.07	0.22	
17	DA0638A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.84	0.62	0.06	0.22	
18	DA0638A-251	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.84	0.62	0.06	0.22	
19	DA0638A-252	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.84	0.62	0.06	0.22	
20	DA0638A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.83	0.63	0.06	0.22	
21	DA0638A-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.83	0.60	0.06	0.22	
22	DA0656A	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	5/16	0.67	0.60	0.07	0.22	
23	DA0656A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	5/16	0.74	0.56	0.07	0.22	
24	DA0656A-251	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	5/16	0.74	0.56	0.07	0.22	
25	DA0656A-252	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	5/16	0.74	0.56	0.07	0.22	
26	DA0656A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	5/16	0.70	0.52	0.07	0.22	
27	DA0656A-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	5/16	0.70	0.60	0.07	0.22	
28	LA0610A	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.65	0.44	0.08	0.22	
29	LA0610A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.53	0.45	0.09	0.22	
30	LA0610A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	#10	0.52	0.41	0.09	0.22	

#6 AWG

Compression Connectors / One hole 90° / #6 AWG

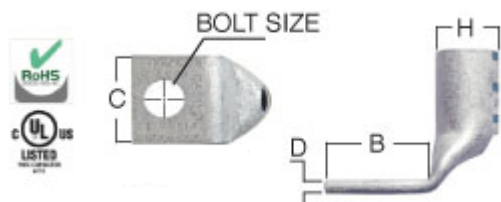

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
31	LA0612A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/2	1.08	0.83	0.12	0.22	
32	LA0612AP-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/2	1.08	0.83	0.12	0.22	
33	LA0614A	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.65	0.44	0.08	0.22	
34	LA0614A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.62	0.48	0.08	0.22	
35	LA0614A-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.64	0.41	0.09	0.22	
36	LA0614AP-251	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.62	0.48	0.08	0.22	
37	LA0614AP-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.64	0.48	0.08	0.22	
38	LA0614AP-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.64	0.48	0.08	0.22	
39	LA0638A-250	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.84	0.62	0.05	0.22	
40	LA0638AP-251	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.84	0.62	0.06	0.22	
41	LA0638AP-260	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.83	0.58	0.06	0.22	
42	LA0638AP-261	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	3/8	0.83	0.58	0.06	0.22	
43	WP0614A-112	6 AWG	30 Navy 6 Weld 133/.014 61/24 = 24.6 kcmil	1/4	0.52	0.44	0.09	0.21	

#4 AWG

Compression Connectors / One hole 90°

#4 AWG

Compression Connectors / One hole 90° / #4 AWG

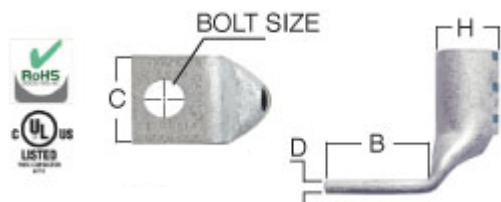


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA0410A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.60	0.55	0.09	0.27
2	DA0410A-250	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.53	0.55	0.09	0.28
3	DA0410A-251	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.53	0.55	0.09	0.28
4	DA0410A-252	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.53	0.55	0.09	0.28
5	DA0410A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	8-10	0.52	0.50	0.09	0.26
6	DA0410A-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	10-8	0.52	0.55	0.09	0.28
7	DA0412A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/2	1.40	1.00	0.06	0.27
8	DA0412A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/2	1.08	0.71	0.06	0.26
9	DA0412A-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/2	1.08	0.71	0.07	0.28
10	DA0414A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.60	0.55	0.09	0.27
11	DA0414A-250	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.62	0.55	0.09	0.28
12	DA0414A-251	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.62	0.55	0.09	0.28
13	DA0414A-252	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.62	0.55	0.09	0.28
14	DA0414A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.64	0.50	0.09	0.26
15	DA0414A-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.64	0.55	0.09	0.28
16	DA0438A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.66	0.61	0.07	0.27
17	DA0438A-250	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.84	0.62	0.07	0.28
18	DA0438A-251	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.84	0.62	0.07	0.28
19	DA0438A-252	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.84	0.62	0.07	0.28
20	DA0438A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.83	0.58	0.08	0.26
21	DA0438A-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.83	0.58	0.08	0.28
22	DA0456A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	5/16	0.66	0.61	0.07	0.27
23	DA0456A-250	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	5/16	0.74	0.55	0.09	0.28
24	DA0456A-251	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	5/16	0.74	0.55	0.09	0.28
25	DA0456A-252	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	5/16	0.74	0.55	0.09	0.28
26	DA0456A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	5/16	0.70	0.50	0.08	0.26
27	DA0456A-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	5/16	0.70	0.55	0.09	0.28
28	LA0410A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.65	0.52	0.10	0.27
29	LA0410A-250	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.53	0.55	0.09	0.28
30	LA0410A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	#10	0.52	0.56	0.09	0.26

#4 AWG

Compression Connectors / One hole 90° / #4 AWG

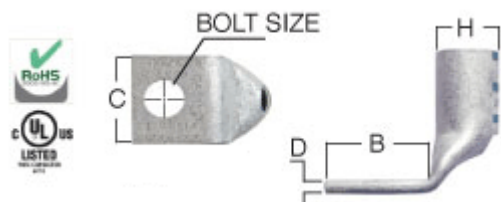

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8


#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
31	LA0412A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/2	1.08	0.83	0.12	0.26
32	LA0412AP-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/2	1.08	0.83	0.12	0.26
33	LA0414A	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.65	0.52	0.10	0.27
34	LA0414A-250	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.62	0.55	0.09	0.28
35	LA0414A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.64	0.56	0.09	0.26
36	LA0414AP-251	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.62	0.55	0.09	0.28
37	LA0414AP-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.64	0.49	0.09	0.26
38	LA0414AP-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	1/4	0.64	0.55	0.09	0.28
39	LA0438A-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.83	0.58	0.08	0.26
40	LA0438AP-251	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.84	0.62	0.07	0.28
41	LA0438AP-260	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.83	0.58	0.08	0.26
42	LA0438AP-261	4 AWG	40-50 Navy 133/.0177 49/.029 91/24 = 36.7 kcmil	3/8	0.83	0.58	0.08	0.28

#2 AWG

Compression Connectors / One hole 90°

#2 AWG

Compression Connectors / One hole 90° / #2 AWG

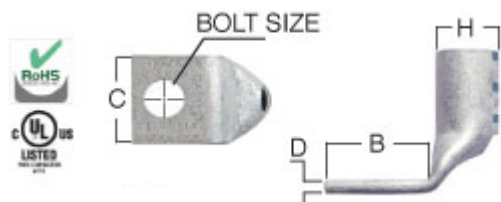


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10

#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA0210A-251	2 AWG	150/24 #2 Weld	#10	0.54	0.70	0.11	0.36
2	DA0210A-261	2 AWG	150/24 #2 Weld	#10	0.52	0.68	0.10	0.36
3	DA0212A	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	1.08	0.75	0.08	0.30
4	DA0212A-250	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	1.07	0.75	0.08	0.31
5	DA0212A-251	2 AWG	150/24 #2 Weld	1/2	1.07	0.75	0.09	0.36
6	DA0212A-252	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	1.07	0.75	0.08	0.31
7	DA0212A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	1.08	0.73	0.09	0.30
8	DA0212A-261	2 AWG	150/24 #2 Weld	1/2	1.08	0.77	0.09	0.36
9	DA0214A	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	0.65	0.59	0.11	0.30
10	DA0214A-250	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	0.63	0.60	0.10	0.31
11	DA0214A-251	2 AWG	150/24 #2 Weld	1/4	0.63	0.70	0.11	0.36
12	DA0214A-252	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	0.63	0.60	0.10	0.31
13	DA0214A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	0.64	0.61	0.11	0.30
14	DA0214A-261	2 AWG	150/24 #2 Weld	1/4	0.64	0.68	0.10	0.36
15	DA0238A	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	0.80	0.59	0.11	0.30
16	DA0238A-250	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	0.83	0.66	0.10	0.31
17	DA0238A-251	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	0.83	0.70	0.11	0.36
18	DA0238A-252	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	0.83	0.66	0.10	0.31
19	DA0238A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	0.83	0.61	0.11	0.30
20	DA0238A-261	2 AWG	150/24 #2 Weld	3/8	0.83	0.68	0.10	0.36
21	DA0256A	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.88	0.59	0.11	0.30
22	DA0256A-250	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.76	0.66	0.10	0.31
23	DA0256A-251	2 AWG	150/24 #2 Weld	5/16	0.76	0.70	0.11	0.36
24	DA0256A-252	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.76	0.66	0.10	0.31
25	DA0256A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.70	0.61	0.11	0.30
26	DA0256A-261	2 AWG	150/24 #2 Weld	5/16	0.70	0.68	0.10	0.36
27	LA0210A	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	0.65	0.59	0.11	0.30
28	LA0210A-250	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	0.56	0.60	0.10	0.31
29	LA0210A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	0.52	0.61	0.11	0.30
30	LA0212A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	1.08	0.83	0.12	0.30

#2 AWG

Compression Connectors / One hole 90° / #2 AWG

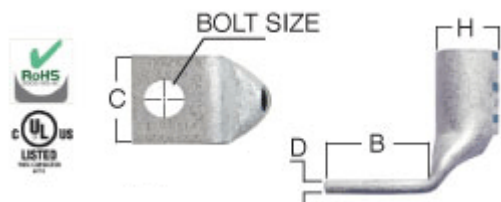

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
31	LA0212AP-251	2 AWG	150/24 #2 Weld	1/2	1.07	0.75	0.09	0.36
32	LA0212AP-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	1.08	0.83	0.09	0.30
33	LA0212AP-261	2 AWG	150/24 #2 Weld	1/2	1.08	0.83	0.09	0.36
34	LA0214A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	0.64	0.60	0.11	0.30
35	LA0214AP-251	2 AWG	150/24 #2 Weld	1/4	0.63	0.70	0.11	0.36
36	LA0214AP-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	0.64	0.60	0.11	0.30
37	LA0214AP-261	2 AWG	150/24 #2 Weld	1/4	0.64	0.68	0.10	0.36
38	LA0238AP-251	2 AWG	150/24 #2 Weld	3/8	0.83	0.70	0.11	0.36
39	LA0238AP-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	0.83	0.60	0.11	0.30
40	LA0238AP-261	2 AWG	150/24 #2 Weld	3/8	0.83	0.68	0.10	0.36
41	LA0256A	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.88	0.59	0.11	0.30
42	LA0256A-250	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.76	0.66	0.10	0.31
43	LA0256A-260	2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	0.70	0.61	0.11	0.30

#1 AWG

Compression Connectors / One hole 90°

#1 AWG

Compression Connectors / One hole 90° / #1 AWG

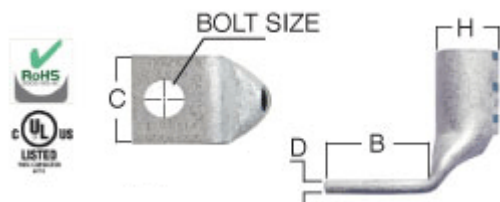


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA0110A-251	1 AWG	225/24 #1 Weld	#10	0.54	0.76	0.12	0.39
2	DA0110A-261	1 AWG	225/24 #1 Weld	#10	0.52	0.75	0.12	0.39
3	DA0112A-250	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/2	1.07	0.75	0.09	0.36
4	DA0112A-251	1 AWG	225/24 #1 Weld	1/2	1.07	0.80	0.12	0.39
5	DA0112A-252	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/2	1.07	0.75	0.09	0.36
6	DA0112A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/2	1.08	0.73	0.09	0.36
7	DA0112A-261	1 AWG	225/24 #1 Weld	1/2	1.08	0.75	0.12	0.39
8	DA0114A	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/4	0.65	0.68	0.11	0.36
9	DA0114A-250	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/4	0.63	0.70	0.11	0.36
10	DA0114A-251	1 AWG	225/24 #1 Weld	1/4	0.70	0.76	0.12	0.39
11	DA0114A-252	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/4	0.63	0.70	0.11	0.36
12	DA0114A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/4	0.64	0.68	0.10	0.36
13	DA0114A-261	1 AWG	225/24 #1 Weld	1/4	0.64	0.75	0.12	0.39
14	DA0138A	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	3/8	0.98	0.68	0.11	0.36
15	DA0138A-250	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	3/8	0.83	0.70	0.11	0.36
16	DA0138A-251	1 AWG	225/24 #1 Weld	3/8	0.83	0.76	0.12	0.39
17	DA0138A-252	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	3/8	0.83	0.70	0.11	0.36
18	DA0138A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	3/8	0.83	0.68	0.10	0.36
19	DA0138A-261	1 AWG	225/24 #1 Weld	3/8	0.83	0.75	0.12	0.39
20	DA0156A	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.93	0.68	0.11	0.36
21	DA0156A-250	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.76	0.70	0.11	0.36
22	DA0156A-251	1 AWG	225/24 #1 Weld	5/16	0.76	0.76	0.12	0.39
23	DA0156A-252	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.76	0.70	0.11	0.36
24	DA0156A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.70	0.68	0.10	0.36
25	DA0156A-261	1 AWG	225/24 #1 Weld	5/16	0.70	0.75	0.12	0.39
26	DA0438A	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/2	1.25	0.76	0.11	0.36
27	LA0110A	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	#10	0.65	0.68	0.11	0.36
28	LA0110A-250	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	#10	0.56	0.70	0.11	0.36
29	LA0110A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	#10	0.52	0.68	0.10	0.36
30	LA0112A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/2	1.08	0.83	0.12	0.36

#1 AWG

Compression Connectors / One hole 90° / #1 AWG

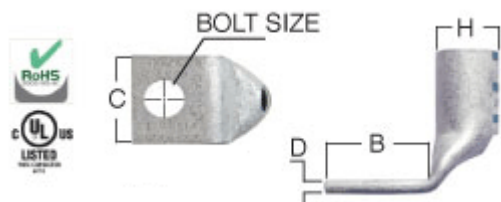

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11


#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
31	LA0112AP-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/2	1.08	0.83	0.09	0.36
32	LA0114AP-251	1 AWG	225/24 #1 Weld	1/4	0.70	0.76	0.12	0.39
33	LA0114AP-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	1/4	0.64	0.67	0.10	0.36
34	LA0114AP-261	1 AWG	225/24 #1 Weld	1/4	0.64	0.75	0.12	0.39
35	LA0138AP-251	1 AWG	225/24 #1 Weld	3/8	0.83	0.76	0.12	0.39
36	LA0138AP-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	3/8	0.83	0.67	0.10	0.36
37	LA0138AP-261	1 AWG	225/24 #1 Weld	3/8	0.83	0.75	0.12	0.39
38	LA0156A	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.88	0.68	0.11	0.36
39	LA0156A-250	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.76	0.70	0.11	0.36
40	LA0156A-260	1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.223	5/16	0.70	0.68	0.10	0.36
41	LA0156AP-251	1 AWG	225/24 #1 Weld	5/16	0.76	0.76	0.12	0.39
42	LA0156AP-261	1 AWG	225/24 #1 Weld	5/16	0.70	0.75	0.12	0.39

1/0 AWG

Compression Connectors / One hole 90°

1/0 AWG

Compression Connectors / One hole 90° / 1/0 AWG

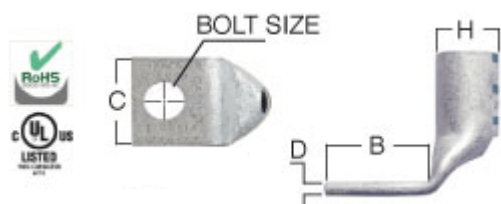


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA1012A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.25	0.75	0.13	0.40
2	DA1012A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.07	0.80	0.12	0.39
3	DA1012A-251	1/0 AWG	275/24 1/0 Weld	1/2	1.09	0.85	0.13	0.45
4	DA1012A-252	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.07	0.80	0.12	0.39
5	DA1012A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.08	0.75	0.12	0.39
6	DA1012A-261	1/0 AWG	275/24 1/0 Weld	1/2	1.08	0.83	0.12	0.44
7	DA1014A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	0.65	0.75	0.13	0.40
8	DA1014A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	0.70	0.76	0.12	0.39
9	DA1014A-251	1/0 AWG	275/24 1/0 Weld	1/4	0.78	0.85	0.13	0.45
10	DA1014A-252	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	0.70	0.76	0.12	0.39
11	DA1014A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	0.64	0.75	0.12	0.39
12	DA1014A-261	1/0 AWG	275/24 1/0 Weld	1/4	0.64	0.83	0.12	0.44
13	DA1038A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.93	0.75	0.13	0.40
14	DA1038A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.83	0.76	0.12	0.39
15	DA1038A-251	1/0 AWG	275/24 1/0 Weld	3/8	0.84	0.85	0.13	0.45
16	DA1038A-252	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.83	0.76	0.12	0.39
17	DA1038A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.83	0.75	0.12	0.39
18	DA1038A-261	1/0 AWG	275/24 1/0 Weld	3/8	0.83	0.83	0.12	0.44
19	DA1056A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.88	0.75	0.13	0.40
20	DA1056A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.76	0.76	0.12	0.39
21	DA1056A-251	1/0 AWG	275/24 1/0 Weld	5/16	0.78	0.85	0.13	0.45
22	DA1056A-252	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.76	0.76	0.12	0.39
23	DA1056A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.70	0.88	0.12	0.39
24	DA1056A-261	1/0 AWG	275/24 1/0 Weld	5/16	0.70	0.83	0.12	0.44
25	LA1010A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	#10	0.65	0.75	0.13	0.40
26	LA1010A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	#10	0.56	0.76	0.12	0.39
27	LA1010A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	#10	0.52	0.75	0.12	0.39
28	LA1012A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.25	0.75	0.13	0.40
29	LA1012A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.07	0.80	0.12	0.39
30	LA1012A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.08	0.81	0.11	0.39

1/0 AWG

Compression Connectors / One hole 90° / 1/0 AWG

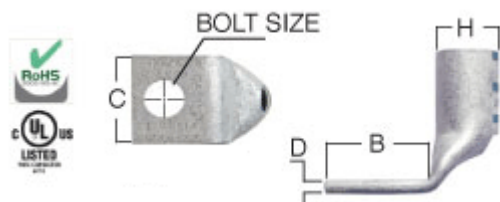

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12


#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
31	LA1012AP-251	1/0 AWG	275/24 1/0 Weld	1/2	1.09	0.85	0.13	0.45
32	LA1012AP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	1.08	0.83	0.12	0.39
33	LA1012AP-261	1/0 AWG	275/24 1/0 Weld	1/2	1.08	0.83	0.12	0.44
34	LA1014AP-251	1/0 AWG	275/24 1/0 Weld	1/4	0.80	0.85	0.13	0.45
35	LA1014AP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	0.64	0.75	0.12	0.39
36	LA1014AP-261	1/0 AWG	275/24 1/0 Weld	1/4	0.64	0.83	0.12	0.44
37	LA1038A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.93	0.75	0.13	0.40
38	LA1038A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.83	0.76	0.12	0.39
39	LA1038A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.83	0.75	0.12	0.39
40	LA1038AP-251	1/0 AWG	275/24 1/0 Weld	3/8	0.84	0.85	0.13	0.45
41	LA1038AP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.83	0.75	0.12	0.39
42	LA1038AP-261	1/0 AWG	275/24 1/0 Weld	3/8	0.83	0.83	0.12	0.44
43	LA1056A	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.88	0.75	0.13	0.40
44	LA1056A-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.76	0.76	0.12	0.39
45	LA1056A-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.70	0.75	0.12	0.39
46	LA1056AP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	0.70	0.75	0.12	0.39
47	WP1038A-022	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	0.81	0.74	0.12	0.40

2/0 AWG

Compression Connectors / One hole 90°

2/0 AWG

Compression Connectors / One hole 90° / 2/0 AWG

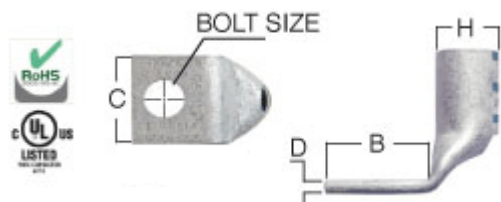


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA2010A-251	2/0 AWG	325/24 2/0 Weld	#10	0.54	0.96	0.13	0.51
2	DA2010A-261	2/0 AWG	325/24 2/0 Weld	#10	0.52	0.93	0.13	0.50
3	DA2012A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.25	0.83	0.13	0.44
4	DA2012A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.09	0.85	0.13	0.45
5	DA2012A-251	2/0 AWG	325/24 2/0 Weld	1/2	1.09	0.96	0.13	0.51
6	DA2012A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.09	0.85	0.13	0.45
7	DA2012A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.08	0.83	0.12	0.44
8	DA2012A-261	2/0 AWG	325/24 2/0 Weld	1/2	1.08	0.93	0.13	0.50
9	DA2014A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.65	0.83	0.13	0.44
10	DA2014A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.80	0.85	0.13	0.45
11	DA2014A-251	2/0 AWG	325/24 2/0 Weld	1/4	0.78	0.96	0.13	0.51
12	DA2014A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.78	0.85	0.13	0.45
13	DA2014A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.64	0.83	0.12	0.44
14	DA2014A-261	2/0 AWG	325/24 2/0 Weld	1/4	0.64	0.93	0.13	0.50
15	DA2034A-251	2/0 AWG	325/24 2/0 Weld	3/4	1.52	0.96	0.13	0.51
16	DA2034A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/4	1.52	0.96	0.12	0.44
17	DA2034A-261	2/0 AWG	325/24 2/0 Weld	3/4	1.52	1.10	0.11	0.50
18	DA2038A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.93	0.83	0.13	0.44
19	DA2038A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.84	0.85	0.13	0.45
20	DA2038A-251	2/0 AWG	325/24 2/0 Weld	3/8	0.84	0.96	0.13	0.51
21	DA2038A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.84	0.85	0.13	0.45
22	DA2038A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.83	0.83	0.12	0.44
23	DA2038A-261	2/0 AWG	325/24 2/0 Weld	3/8	0.83	0.93	0.13	0.50
24	DA2056A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.88	0.83	0.13	0.44
25	DA2056A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.78	0.85	0.13	0.45
26	DA2056A-251	2/0 AWG	325/24 2/0 Weld	5/16	0.78	0.96	0.13	0.51
27	DA2056A-252	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.78	0.85	0.13	0.45
28	DA2056A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	0.70	0.83	0.12	0.44
29	DA2056A-261	2/0 AWG	325/24 2/0 Weld	5/16	0.70	0.93	0.13	0.50
30	DA2058A-251	2/0 AWG	325/24 2/0 Weld	5/8	1.33	0.96	0.13	0.51

2/0 AWG

Compression Connectors / One hole 90° / 2/0 AWG

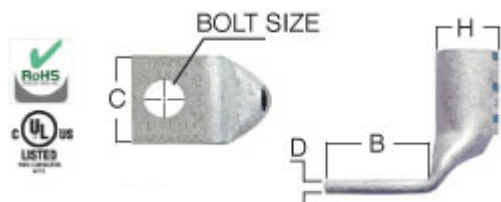

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
31	DA2058A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/8	1.33	0.88	0.11	0.44	
32	DA2058A-261	2/0 AWG	325/24 2/0 Weld	5/8	1.33	0.93	0.13	0.50	
33	LA2012A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.25	0.83	0.13	0.44	
34	LA2012A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.09	0.85	0.13	0.45	
35	LA2012A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.08	0.83	0.12	0.44	
36	LA2012AP-251	2/0 AWG	325/24 2/0 Weld	1/2	1.09	0.96	0.13	0.51	
37	LA2012AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	1.08	0.83	0.12	0.44	
38	LA2012AP-261	2/0 AWG	325/24 2/0 Weld	1/2	1.08	0.93	0.13	0.50	
39	LA2014AP-251	2/0 AWG	325/24 2/0 Weld	1/4	0.78	0.96	0.13	0.51	
40	LA2014AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	0.64	0.83	0.12	0.44	
41	LA2014AP-261	2/0 AWG	325/24 2/0 Weld	1/4	0.64	0.93	0.13	0.50	
42	LA2038A	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.93	0.83	0.13	0.44	
43	LA2038A-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.84	0.85	0.13	0.45	
44	LA2038A-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.83	0.83	0.12	0.44	
45	LA2038AP-251	2/0 AWG	325/24 2/0 Weld	3/8	0.84	0.96	0.13	0.51	
46	LA2038AP-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.83	0.83	0.12	0.44	
47	LA2038AP-261	2/0 AWG	325/24 2/0 Weld	3/8	0.83	0.93	0.13	0.50	
48	WP2012A-146	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	0.81	0.83	0.12	0.44	
49	WP2038A-012	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	0.81	0.83	0.12	0.44	

3/0 AWG

Compression Connectors / One hole 90°

3/0 AWG

Compression Connectors / One hole 90° / 3/0 AWG

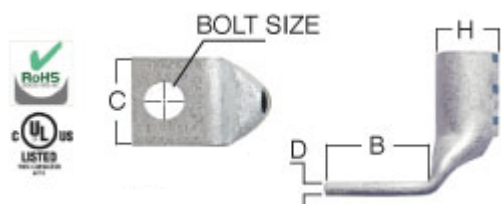


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA3010A-251	3/0 AWG 450/24 3/0 Weld		#10	0.54	1.06	0.14	0.57
2	DA3010A-261	3/0 AWG 450/24/ 3/0 Weld		#10	0.52	1.03	0.14	0.56
3	DA3012A	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.25	0.92	0.13	0.51
4	DA3012A-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.09	0.96	0.13	0.51
5	DA3012A-251	3/0 AWG 450/24 3/0 Weld		1/2	1.09	1.06	0.14	0.57
6	DA3012A-252	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.09	0.96	0.13	0.51
7	DA3012A-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.08	0.91	0.13	0.50
8	DA3012A-261	3/0 AWG 450/24/ 3/0 Weld		1/2	1.08	1.03	0.14	0.56
9	DA3014A	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/4	0.65	0.92	0.13	0.51
10	DA3014A-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/4	0.78	0.96	0.13	0.51
11	DA3014A-251	3/0 AWG 450/24 3/0 Weld		1/4	0.78	1.06	0.14	0.57
12	DA3014A-252	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/4	0.78	0.96	0.13	0.51
13	DA3014A-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/4	0.64	1.00	0.13	0.50
14	DA3014A-261	3/0 AWG 450/24/ 3/0 Weld		1/4	0.64	1.03	0.14	0.56
15	DA3038A	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		3/8	0.93	0.92	0.13	0.51
16	DA3038A-019	3/0 AWG 450/24/ 3/0 Weld		3/8	0.83	1.03	0.14	0.56
17	DA3038A-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		3/8	0.84	0.96	0.13	0.51
18	DA3038A-251	3/0 AWG 450/24 3/0 Weld		3/8	0.86	1.06	0.14	0.57
19	DA3038A-252	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		3/8	0.84	0.96	0.13	0.51
20	DA3038A-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		3/8	0.83	0.91	0.13	0.50
21	DA3056A	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		5/16	0.88	0.92	0.13	0.51
22	DA3056A-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		5/16	0.78	0.96	0.13	0.51
23	DA3056A-251	3/0 AWG 450/24 3/0 Weld		5/16	0.79	1.06	0.14	0.57
24	DA3056A-252	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		5/16	0.78	0.96	0.13	0.51
25	DA3056A-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		5/16	0.70	0.91	0.13	0.50
26	DA3056A-261	3/0 AWG 450/24/ 3/0 Weld		5/16	0.70	1.03	0.14	0.56
27	LA3012A	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.25	0.92	0.13	0.51
28	LA3012A-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.09	0.96	0.13	0.51
29	LA3012A-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.08	0.91	0.13	0.50
30	LA3012AP-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil 133/.0316 259/.0227 427/.0177		1/2	1.08	0.91	0.12	0.50

3/0 AWG

Compression Connectors / One hole 90° / 3/0 AWG

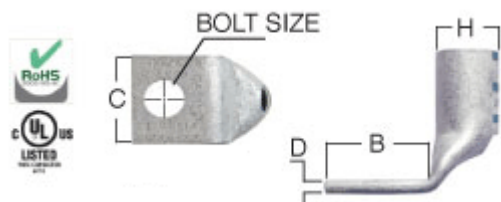

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14


#	Cat.No	Wire Size				Dimension (in.)					
		Code	Flex Class G,H,I,K,M			Bolt Size	B	C	D	H	
31	LA3038A-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	0.84	0.96	0.13	0.51
32	LA3038AP-251	3/0 AWG	450/24/ 3/0 Weld				3/8	0.86	1.06	0.14	0.57
33	LA3038AP-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	0.83	0.90	0.12	0.50
34	LA3038AP-261	3/0 AWG	450/24/ 3/0 Weld				3/8	0.83	1.03	0.14	0.56
35	WP3038A-019	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	0.81	0.93	0.12	0.50

4/0 AWG

Compression Connectors / One hole 90°

4/0 AWG

Compression Connectors / One hole 90° / 4/0 AWG

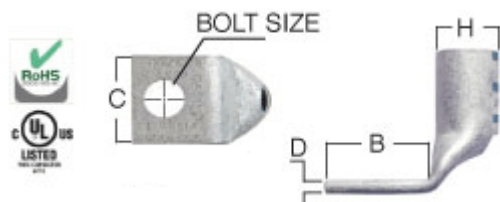


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA2514A	250 kcmil	250 Navy 262.6 kcmil	1/4	0.65	1.13	0.14	0.63
2	DA2556A	250 kcmil	250 Navy 262.6 kcmil	5/16	0.88	1.13	0.14	0.63
3	DA4012A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.25	1.03	0.14	0.56
4	DA4012A-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.09	1.06	0.14	0.57
5	DA4012A-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	1/2	1.12	1.19	0.16	0.65
6	DA4012A-252	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.09	1.06	0.14	0.57
7	DA4012A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.08	1.02	0.14	0.56
8	DA4012A-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	1/2	1.08	1.14	0.15	0.64
9	DA4014A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	0.65	1.03	0.14	0.56
10	DA4014A-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	0.78	1.06	0.14	0.57
11	DA4014A-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	1/4	0.78	1.19	0.16	0.65
12	DA4014A-252	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	0.78	1.06	0.14	0.57
13	DA4014A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	0.64	1.02	0.14	0.56
14	DA4014A-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	1/4	0.64	1.14	0.15	0.64
15	DA4034A-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	3/4	1.52	1.19	0.16	0.65
16	DA4034A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/4	1.52	1.05	0.13	0.56
17	DA4034A-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	3/4	1.52	1.14	0.15	0.64
18	DA4038A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.93	1.03	0.14	0.56
19	DA4038A-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.86	1.06	0.14	0.57
20	DA4038A-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	3/8	1.01	1.19	0.16	0.65
21	DA4038A-252	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.86	1.06	0.14	0.57
22	DA4038A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.83	1.02	0.14	0.56
23	DA4038A-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	3/8	0.83	1.14	0.15	0.64
24	DA4056A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	0.87	1.03	0.14	0.56
25	DA4056A-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	0.79	1.06	0.14	0.57
26	DA4056A-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	5/16	1.01	1.19	0.16	0.65
27	DA4056A-252	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	0.79	1.06	0.14	0.57
28	DA4056A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	0.70	1.02	0.14	0.56
29	DA4056A-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	5/16	0.70	1.14	0.15	0.64
30	DA4058A-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	5/8	1.33	1.19	0.16	0.65

4/0 AWG

Compression Connectors / One hole 90° / 4/0 AWG

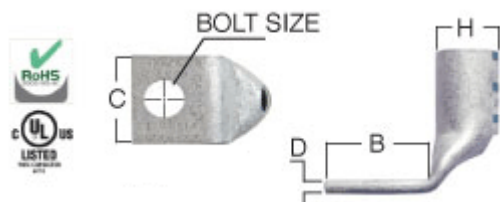

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
31	DA4058A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/8	1.33	1.02	0.14	0.56	
32	DA4058A-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	5/8	1.33	1.14	0.15	0.64	
33	LA4012-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.09	1.06	0.14	0.57	
34	LA4012A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.25	1.03	0.14	0.56	
35	LA4012A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.08	1.02	0.14	0.56	
36	LA4012AP-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	1/2	1.12	1.19	0.16	0.65	
37	LA4012AP-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	1.08	1.02	0.14	0.56	
38	LA4012AP-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	1/2	1.08	1.14	0.14	0.64	
39	LA4014A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	1.00	1.03	0.14	0.56	
40	LA4038A	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	1.13	1.03	0.14	0.56	
41	LA4038A-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.90	1.06	0.14	0.57	
42	LA4038A-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.93	1.02	0.14	0.56	
43	LA4038AP-251	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	3/8	1.01	1.19	0.16	0.65	
44	LA4038AP-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.83	1.02	0.14	0.56	
45	LA4038AP-261	4/0 AWG	550/24 = 222 kcmil 4/0 Weld	3/8	0.83	1.14	0.14	0.64	
46	WP4038A-030	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	0.80	1.00	0.14	0.56	

250 kcmil

Compression Connectors / One hole 90°

250 kcmil

Compression Connectors / One hole 90° / 250 kcmil

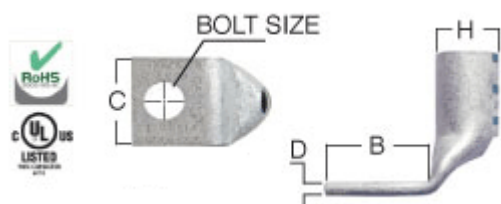


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA2512A	250 kcmil	250 Navy 262.6 kcmil	1/2	1.25	1.13	0.14	0.63
2	DA2512A-250	250 kcmil	250 Navy 262.6 kcmil	1/2	1.09	1.17	0.14	0.63
3	DA2512A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/2	1.12	1.28	0.17	0.70
4	DA2512A-252	250 kcmil	250 Navy 262.6 kcmil	1/2	1.09	1.17	0.14	0.63
5	DA2512A-260	250 kcmil	250 Navy 262.6 kcmil	1/2	1.08	1.11	0.16	0.61
6	DA2512A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/2	1.08	1.20	0.16	0.65
7	DA2512A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	1/2	1.08	1.29	0.18	0.70
8	DA2514-261	250 kcmil	250 kcmil 637/24 Class I,K,M	1/4	0.64	1.29	0.18	0.70
9	DA2514A-250	250 kcmil	250 Navy 262.6 kcmil	1/4	0.78	1.17	0.14	0.63
10	DA2514A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	1/4	0.78	1.28	0.17	0.70
11	DA2514A-252	250 kcmil	250 Navy 262.6 kcmil	1/4	0.78	1.17	0.14	0.63
12	DA2514A-260	250 kcmil	250 Navy 262.6 kcmil	1/4	0.64	1.11	0.16	0.61
13	DA2534A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/4	1.52	1.28	0.17	0.70
14	DA2534A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/4	1.52	1.20	0.16	0.65
15	DA2534A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/4	1.52	1.29	0.18	0.70
16	DA2538A	250 kcmil	250 Navy 262.6 kcmil	3/8	0.93	1.13	0.14	0.63
17	DA2538A-250	250 kcmil	250 Navy 262.6 kcmil	3/8	0.86	1.17	0.14	0.63
18	DA2538A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	1.01	1.28	0.17	0.70
19	DA2538A-252	250 kcmil	250 Navy 262.6 kcmil	3/8	0.86	1.17	0.14	0.63
20	DA2538A-260	250 kcmil	250 Navy 262.6 kcmil	3/8	0.83	1.11	0.16	0.61
21	DA2538A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	0.83	1.20	0.16	0.65
22	DA2538A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/8	0.83	1.29	0.18	0.70
23	DA2556A-250	250 kcmil	250 Navy 262.6 kcmil	5/16	0.79	1.17	0.14	0.63
24	DA2556A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/16	0.82	1.28	0.17	0.70
25	DA2556A-252	250 kcmil	250 Navy 262.6 kcmil	5/16	0.79	1.17	0.14	0.63
26	DA2556A-260	250 kcmil	250 Navy 262.6 kcmil	5/16	0.70	1.11	0.16	0.61
27	DA2556A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/16	0.70	1.20	0.16	0.65
28	DA2556A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	5/16	0.70	1.29	0.18	0.70
29	DA2558A-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/8	1.33	1.28	0.17	0.70
30	DA2558A-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	5/8	1.33	1.20	0.16	0.65

250 kcmil

Compression Connectors / One hole 90° / 250 kcmil

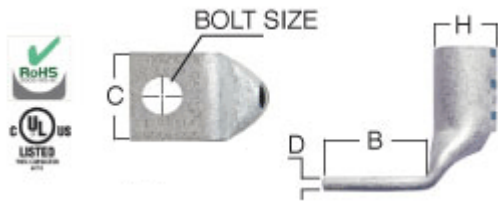

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
31	DA2558A-263	250 kcmil	250 kcmil 637/24 Class I,K,M	5/8	1.33	1.29	0.18	0.70	
32	DA2578A-260	250 kcmil	250 Navy 262.6 kcmil	7/8	1.77	1.11	0.14	0.61	
33	LA2512A	250 kcmil	250 Navy 262.6 kcmil	1/2	1.25	1.13	0.14	0.63	
34	LA2512A-250	250 kcmil	250 Navy 262.6 kcmil	1/2	1.09	1.17	0.14	0.63	
35	LA2512A-260	250 kcmil	250 Navy 262.6 kcmil	1/2	1.08	1.11	0.16	0.61	
36	LA2512AP-260	250 kcmil	250 Navy 262.6 kcmil	1/2	1.08	1.10	0.16	0.61	
37	LA2538AP-251	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	1.01	1.28	0.17	0.70	
38	LA2538AP-260	250 kcmil	250 Navy 262.6 kcmil	3/8	0.83	1.10	0.16	0.61	
39	LA2538AP-261	250 kcmil	250 kcmil Class G 259 Str Class H 427 Str	3/8	0.83	1.20	0.16	0.65	
40	LA2538AP-263	250 kcmil	250 kcmil 637/24 Class I,K,M	3/8	0.83	1.28	0.18	0.70	
41	LA2578A-250	250 kcmil	250 Navy 262.6 kcmil	7/8	1.63	1.25	0.12	0.63	
42	WP2512A-026	250 kcmil	250 Navy 262.6 kcmil	1/2	1.12	1.20	0.16	0.64	
43	WP2538A-080	250 kcmil	250 Navy 262.6 kcmil	3/8	0.99	1.20	0.16	0.64	
44	WP2538A-174	250 kcmil	250 Navy 262.6 kcmil	3/8	1.06	1.09	0.16	0.64	

300 kcmil

Compression Connectors / One hole 90°

300 kcmil

Compression Connectors / One hole 90° / 300 kcmil

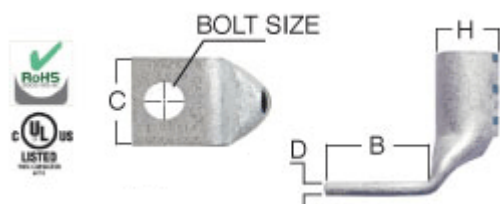

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	CT-720 CT-920	White	P66
Burndy	Y35 Y45	White	17


#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA3112A	300 kcmil	300 Navy	1/2	1.25	1.25	0.15	0.70
2	DA3112A-250	300 kcmil	300 Navy	1/2	1.12	1.19	0.16	0.63
3	DA3112A-251	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	1/2	1.17	1.39	0.18	0.76
4	DA3112A-260	300 kcmil	300 Navy	1/2	1.08	1.20	0.16	0.65
5	DA3112A-261	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	1/2	1.08	1.40	0.19	0.76
6	DA3138	300 kcmil	300 Navy	3/8	0.93	1.25	0.15	0.70
7	DA3138A-250	300 kcmil	300 Navy	3/8	1.10	1.19	0.16	0.63
8	DA3138A-251	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	3/8	1.17	1.39	0.18	0.76
9	DA3138A-260	300 kcmil	300 Navy	3/8	0.83	1.20	0.16	0.65
10	DA3138A-261	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	3/8	0.83	1.40	0.19	0.76
11	DA3156A	300 kcmil	300 Navy	5/16	0.88	1.25	0.15	0.70
12	DA3156A-250	300 kcmil	300 Navy	5/16	1.01	1.19	0.16	0.63
13	DA3156A-260	300 kcmil	300 Navy	5/16	0.70	1.20	0.16	0.65
14	DA3158A	300 kcmil	300 Navy	5/8	1.58	1.25	0.15	0.70
15	DA3158A-250	300 kcmil	300 Navy	5/8	1.33	1.19	0.16	0.63
16	DA3158A-251	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	5/8	1.38	1.39	0.18	0.76
17	DA3158A-260	300 kcmil	300 Navy	5/8	1.33	1.20	0.16	0.65
18	DA3158A-261	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	5/8	1.33	1.40	0.19	0.76
19	DA3178A-250	300 kcmil	300 Navy	7/8	1.77	1.19	0.16	0.63
20	DA3178A-260	300 kcmil	300 Navy	7/8	1.77	1.20	0.16	0.65
21	LA3112A	300 kcmil	300 Navy	1/2	1.25	1.25	0.15	0.70
22	LA3112A-250	300 kcmil	300 Navy	1/2	1.12	1.19	0.16	0.63
23	LA3112A-260	300 kcmil	300 Navy	1/2	1.08	1.20	0.16	0.65
24	LA3112AP-251	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	1/2	1.20	1.39	0.18	0.76
25	LA3112AP-260	300 kcmil	300 Navy	1/2	1.08	1.20	0.16	0.65
26	LA3138A-250	300 kcmil	300 Navy	3/8	1.01	1.19	0.16	0.63
27	LA3138AP-251	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	3/8	1.17	1.39	0.18	0.76
28	LA3138AP-260	300 kcmil	300 Navy	3/8	0.83	1.20	0.16	0.65
29	LA3138AP-261	300 kcmil	300 Weld 259/.034 427/.0265 889/.0183 775.24 = 313 kcmil	3/8	0.83	1.55	0.19	0.76
30	LA3156A-250	300 kcmil	300 Navy	5/16	1.01	1.19	0.16	0.63

350 kcmil

Compression Connectors / One hole 90°

350 kcmil

Compression Connectors / One hole 90° / 350 kcmil

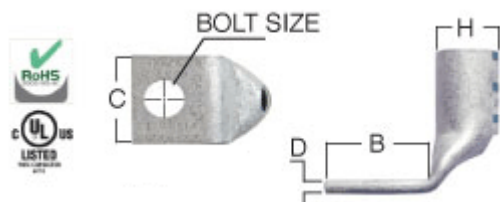

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA3512A	350 kcmil	350 Navy	1/2	1.25	1.36	0.18	0.75
2	DA3512A-250	350 kcmil	350 Navy	1/2	1.12	1.28	0.17	0.70
3	DA3512A-260	350 kcmil	350 Navy	1/2	1.08	1.29	0.18	0.70
4	DA3538A	350 kcmil	350 Navy	3/8	1.25	1.36	0.18	0.75
5	DA3538A-250	350 kcmil	350 Navy	3/8	1.01	1.28	0.17	0.70
6	DA3538A-260	350 kcmil	350 Navy	3/8	0.83	1.29	0.18	0.70
7	DA3558A	350 kcmil	350 Navy	5/8	1.58	1.36	0.18	0.75
8	DA3558A-250	350 kcmil	350 Navy	5/8	1.33	1.28	0.17	0.70
9	DA3558A-260	350 kcmil	350 Navy	5/8	1.33	1.29	0.18	0.70
10	DA3578A-250	350 kcmil	350 Navy	7/8	1.77	1.28	0.17	0.70
11	DA3578A-260	350 kcmil	350 Navy	7/8	1.77	1.29	0.18	0.70
12	LA3512A	350 kcmil	350 Navy	1/2	1.25	1.36	0.18	0.75
13	LA3512A-250	350 kcmil	350 Navy	1/2	1.12	1.28	0.17	0.70
14	LA3512A-260	350 kcmil	350 Navy	1/2	1.08	1.29	0.18	0.70
15	LA3512AP-260	350 kcmil	350 Navy	1/2	1.08	1.29	0.18	0.70
16	LA3538AP-260	350 kcmil	350 Navy	3/8	0.83	1.29	0.18	0.70
17	LA3578A-250	350 kcmil	350 Navy	7/8	1.77	1.28	0.17	0.70
18	WP3512A-051	350 kcmil	350 Navy	1/2	1.12	1.29	0.18	0.71

400 kcmil

Compression Connectors / One hole 90°

400 kcmil

Compression Connectors / One hole 90° / 400 kcmil

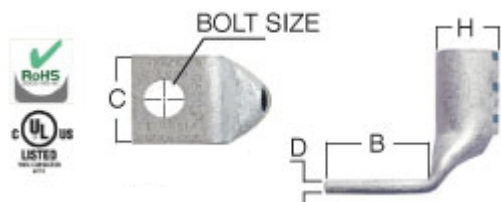

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-720 CT-920	Blue	P76
Burndy	Y35 Y45	Blue	19


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA4112A	400 kcmil	400 Navy	1/2	1.25	1.41	0.17	0.79
2	DA4112A-250	400 kcmil	400 Navy	1/2	1.17	1.39	0.18	0.76
3	DA4112A-260	400 kcmil	400 Navy	1/2	1.08	1.40	0.19	0.76
4	DA4138A-250	400 kcmil	400 Navy	3/8	1.17	1.39	0.18	0.76
5	DA4138A-260	400 kcmil	400 Navy	3/8	0.83	1.38	0.19	0.76
6	DA4158A	400 kcmil	400 Navy	5/8	1.58	1.41	0.17	0.79
7	DA4158A-250	400 kcmil	400 Navy	5/8	1.38	1.39	0.18	0.76
8	DA4158A-260	400 kcmil	400 Navy	5/8	1.33	1.38	0.19	0.76
9	DA4178A-250	400 kcmil	400 Navy	7/8	1.77	1.39	0.18	0.76
10	DA4178A-260	400 kcmil	400 Navy	7/8	1.77	1.40	0.19	0.76
11	LA4112-250	400 kcmil	400 Navy	1/2	1.17	1.39	0.18	0.76
12	LA4112A	400 kcmil	400 Navy	1/2	1.25	1.41	0.17	0.79
13	LA4112A-260	400 kcmil	400 Navy	1/2	1.08	1.38	0.19	0.76
14	LA4112AP-260	400 kcmil	400 Navy	1/2	1.08	1.40	0.19	0.76
15	LA4138AP-260	400 kcmil	400 Navy	3/8	0.83	1.40	0.19	0.76
16	LA4158-260	400 kcmil	400 Navy	5/8	1.33	1.38	0.19	0.76
17	LA4158A	400 kcmil	400 Navy	5/8	1.58	1.41	0.17	0.79
18	LA4158A-250	400 kcmil	400 Navy	5/8	1.38	1.39	0.18	0.76
19	LA4178A-250	400 kcmil	400 Navy	7/8	1.77	1.39	0.18	0.76
20	WP4112A-033	400 kcmil	400 Navy	1/2	1.12	1.55	0.23	0.82

450 kcmil

Compression Connectors / One hole 90°

450 kcmil

Compression Connectors / One hole 90° / 450 kcmil

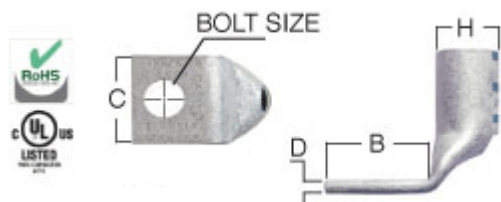

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Brown	-
Panduit	CT-920 CT-930	Brown	P87
Burndy	Y35 Y45	Brown	20

#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H


No items in this section.

500 kcmil

Compression Connectors / One hole 90°

500 kcmil

Compression Connectors / One hole 90° / 500 kcmil

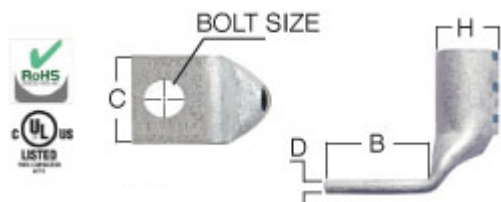

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA5101A-250	500 kcmil	500 Navy	1	1.89	1.54	0.22	0.84
2	DA5101A-260	500 kcmil	500 Navy	1	1.94	1.55	0.23	0.84
3	DA5112A	500 kcmil	500 Navy	1/2	1.25	1.61	0.22	0.88
4	DA5112A-250	500 kcmil	500 Navy	1/2	1.17	1.54	0.22	0.84
5	DA5112A-260	500 kcmil	500 Navy	1/2	1.08	1.55	0.23	0.84
6	DA5134A-250	500 kcmil	500 Navy	3/4	1.52	1.54	0.22	0.84
7	DA5134A-260	500 kcmil	500 Navy	3/4	1.52	1.55	0.23	0.84
8	DA5138A-250	500 kcmil	500 Navy	3/8	1.01	1.54	0.22	0.84
9	DA5138A-260	500 kcmil	500 Navy	3/8	0.83	1.55	0.23	0.84
10	DA5158A	500 kcmil	500 Navy	5/8	1.58	1.61	0.22	0.88
11	DA5158A-250	500 kcmil	500 Navy	5/8	1.38	1.54	0.22	0.84
12	DA5158A-260	500 kcmil	500 Navy	5/8	1.33	1.55	0.23	0.84
13	DA5178A-250	500 kcmil	500 Navy	7/8	1.77	1.54	0.22	0.84
14	DA5178A-260	500 kcmil	500 Navy	7/8	1.77	1.55	0.23	0.84
15	LA5112A	500 kcmil	500 Navy	1/2	1.25	1.61	0.22	0.88
16	LA5112A-250	500 kcmil	500 Navy	1/2	1.17	1.54	0.22	0.84
17	LA5112A-260	500 kcmil	500 Navy	1/2	1.08	1.52	0.23	0.84
18	LA5112AP-260	500 kcmil	500 Navy	1/2	1.08	1.55	0.23	0.84
19	LA5138AP-260	500 kcmil	500 Navy	3/8	0.83	1.55	0.23	0.84
20	LA5158A	500 kcmil	500 Navy	5/8	1.58	1.61	0.22	0.88
21	LA5158A-250	500 kcmil	500 Navy	5/8	1.38	1.54	0.22	0.84
22	LA5158A-260	500 kcmil	500 Navy	5/8	1.33	1.52	0.23	0.84
23	LA5178A-250	500 kcmil	500 Navy	7/8	1.77	1.54	0.22	0.84
24	WP5112A-069	500 kcmil	500 Navy	1/2	1.12	1.55	0.23	0.84

600 kcmil

Compression Connectors / One hole 90°

600 kcmil

Compression Connectors / One hole 90° / 600 kcmil

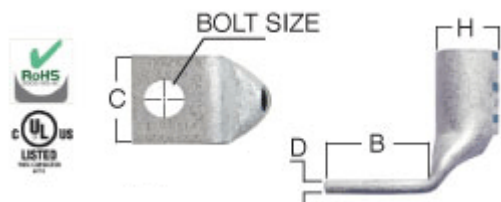

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14	Green	94
Panduit	CT-920 CT-980	Green	P94
Burndy	Y35 Y45	Green	22


#	Cat.No	Code	Wire Size	Dimension (in.)				
			Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA6112A-250	600 kcmil -		1/2	1.77	1.70	0.26	0.92
2	DA6158A	600 kcmil -		5/8	1.58	1.75	0.24	0.96
3	DA6158A-250	600 kcmil -		5/8	1.77	1.70	0.26	0.92
4	DA6158A-260	600 kcmil -		5/8	1.33	1.74	0.27	0.93
5	DA6178A-250	600 kcmil -		7/8	1.77	1.70	0.26	0.92
6	DA6178A-260	600 kcmil -		7/8	1.77	1.74	0.27	0.93
7	LA6112A	600 kcmil -		1/2	1.25	1.75	0.24	0.96
8	LA6112A-250	600 kcmil -		1/2	1.77	1.70	0.26	0.92
9	LA6112A-260	600 kcmil -		1/2	1.08	1.69	0.27	0.93
10	LA6112AP-260	600 kcmil -		1/2	1.08	1.74	0.26	0.93
11	LA6138AP-260	600 kcmil -		3/8	0.83	1.74	0.26	0.93
12	LA6158A	600 kcmil -		5/8	1.58	1.75	0.24	0.96
13	LA6158A-250	600 kcmil -		5/8	1.77	1.70	0.26	0.92
14	LA6158A-260	600 kcmil -		5/8	1.33	1.69	0.27	0.93

700 kcmil

Compression Connectors / One hole 90°

700 kcmil

Compression Connectors / One hole 90° / 700 kcmil

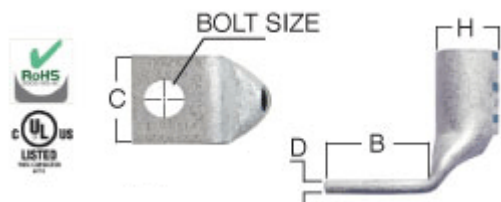

Installation Information

Manufacturer	Tools	Color	Code
T&B	40TON TBM8-750	Pink	99
Panduit	-	Pink	-
Burndy	Y39 Y644M	Pink	400


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
1	DA7112A-241	700 kcmil	1325/24 = 535 kcmil 427/.0342	1/2	1.69	1.81	0.28	0.97	
2	DA7158	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.58	1.84	0.23	0.97	
3	DA7158A-241	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.58	1.81	0.28	0.97	
4	DA7158A-260	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.33	1.84	0.27	0.97	
5	DA7512A-260	750 kcmil	1325/24 = 535 kcmil	1/2	1.08	1.91	0.27	1.03	
6	DA7541A-260	750 kcmil	1325/24 = 535 kcmil	1 1/4	2.50	1.91	0.27	1.03	
7	DA7558A	750 kcmil	1325/24 = 535 kcmil	5/8	1.58	1.94	0.27	1.06	
8	DA7558A-241	750 kcmil	1600/24 = 646 kcmil	5/8	1.58	1.94	0.27	1.06	
9	DA7558A-260	750 kcmil	1325/24 = 535 kcmil	5/8	1.33	1.91	0.27	1.03	
10	DA7578A-260	750 kcmil	1325/24 = 535 kcmil	7/8	1.77	1.91	0.27	1.03	
11	LA7512A	750 kcmil	1325/24 = 535 kcmil	1/2	1.25	1.94	0.27	1.06	
12	LA7512A-260	750 kcmil	1325/24 = 535 kcmil	1/2	1.08	1.89	0.27	1.03	
13	LA7512AP-260	750 kcmil	1325/24 = 535 kcmil	1/2	1.08	1.91	0.27	1.03	
14	LA7538AP-260	750 kcmil	1325/24 = 535 kcmil	3/8	0.83	1.91	0.27	1.03	
15	LA7558A	750 kcmil	1325/24 = 535 kcmil	5/8	1.58	1.94	0.27	1.06	
16	LA7558A-241	750 kcmil	1600/24 = 646 kcmil	5/8	1.58	1.94	0.27	1.06	
17	LA7558A-260	750 kcmil	1325/24 = 535 kcmil	5/8	1.33	1.89	0.27	1.03	
18	WP7112A-091	700 kcmil	1325/24 = 535 kcmil 427/.0342	1/2	1.69	1.79	0.27	0.95	
19	WP7158A-040	700 kcmil	1325/24 = 535 kcmil 427/.0342	5/8	1.69	1.79	0.27	0.95	
20	WP7558A-023	750 kcmil	1325/24 = 535 kcmil	5/8	1.43	1.90	0.27	1.03	

750 kcmil

Compression Connectors / One hole 90°

750 kcmil

Compression Connectors / One hole 90° / 750 kcmil

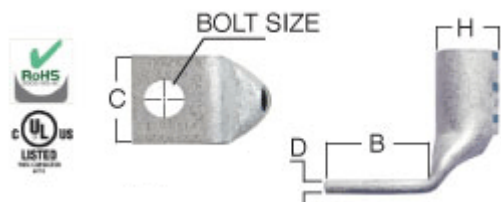

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H


No items in this section.

800 kcmil

Compression Connectors / One hole 90°

800 kcmil

Compression Connectors / One hole 90° / 800 kcmil

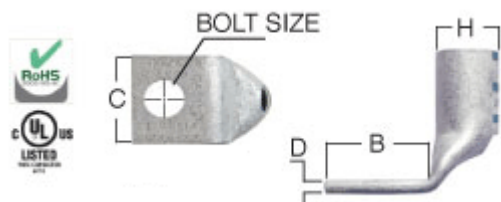

Installation Information

Manufacturer	Tools	Color	Code
T&B	15TON 40TON	Orange	107
Panduit	-	Orange	-
Burndy	Y35 Y46	Orange	25


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA8158A	800 kcmil	800 Navy	5/8	1.58	2.01	0.27	1.11
2	DA8158A-260	800 kcmil	800 Navy	5/8	1.33	1.98	0.30	1.11

900 kcmil

Compression Connectors / One hole 90°

900 kcmil

Compression Connectors / One hole 90° / 900 kcmil

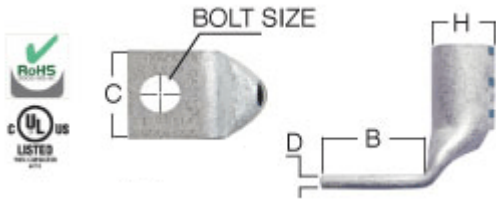

Installation Information

Manufacturer	Tools	Color	Code
T&B	12 TON 15TON	Yellow	115
Panduit	-	Yellow	-
Burndy	-	Yellow	-


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA9158A	900 kcmil	1925/24 = 777 kcmil	5/8	1.58	2.17	0.31	1.19
2	LA9158A	900 kcmil	1925/24 = 777 kcmil	5/8	1.58	2.17	0.31	1.19
3	WP9158A-047	900 kcmil	1925/24 = 777 kcmil	5/8	1.80	2.18	0.33	1.16

1000 kcmil

Compression Connectors / One hole 90°

1000 kcmil

Compression Connectors / One hole 90° / 1000 kcmil

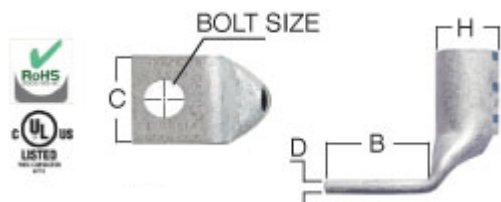

Installation Information

Manufacturer	Tools	Color	Code
T&B	14TON 15TON	White	125
Panduit	CT-920 CT-930	White	P125
Burndy	Y35 Y46	White	27


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA1158A	1000 kcmil	1000 Navy	5/8	1.58	2.27	0.30	1.25
2	DA1158A-260	1000 kcmil	1000 Navy	5/8	1.33	2.19	0.33	1.17
3	LA1112A-260	1000 kcmil	1000 Navy	1/2	1.08	2.19	0.33	1.17
4	LA1112AP-260	1000 kcmil	1000 Navy	1/2	1.08	2.19	0.33	1.17
5	LA1138AP-260	1000 kcmil	1000 Navy	3/8	0.83	2.19	0.33	1.17
6	LA1158A	1000 kcmil	1000 Navy	5/8	1.58	2.27	0.30	1.25
7	LA1158A-260	1000 kcmil	1000 Navy	5/8	1.33	2.17	0.33	1.17
8	LA1178A	1000 kcmil	1000 Navy	7/8	1.83	2.37	0.30	1.25

350 kcmil

Compression Connectors / One hole 90°

350 kcmil

Compression Connectors / One hole 90° / 350 kcmil

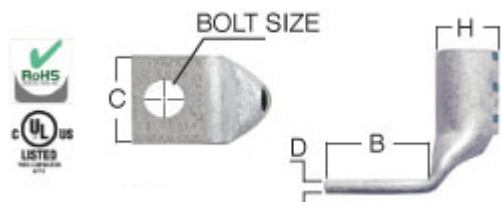

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-920 CT-920CH	Blue	P76
Burndy	Y35 Y45	Blue	19

#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H


No items in this section.

400 kcmil

Compression Connectors / One hole 90°

400 kcmil

Compression Connectors / One hole 90° / 400 kcmil

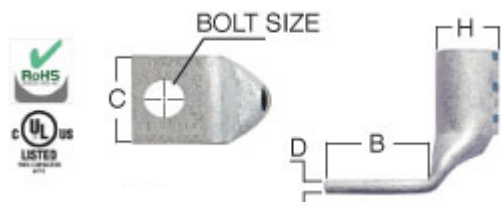

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6H 6TOM	--	80
Panduit	-	--	-
Burndy	-	--	-


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
1	DA4112A-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	1.25	1.61	0.22	0.82	
2	DA4138A-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	1.31	1.61	0.22	0.82	
3	DA4512A-251	-	444.4 kcmil 450 FLEX 1100/24	1/2	1.70	0.26	0.63	0.92	
4	DA4512A-261	-	444.4 kcmil 450 FLEX 1100/24	1/2	1.08	1.74	0.27	0.92	
5	DA4558A-251	-	444.4 kcmil 450 FLEX 1100/24	5/8	1.70	0.26	0.76	0.92	
6	DA4558A-261	-	444.4 kcmil 450 FLEX 1100/24	5/8	1.33	1.74	0.27	0.92	
7	LA4538AP-251	-	444.4 kcmil 450 FLEX 1100/24	3/8	1.52	1.70	0.26	0.92	
8	LA4538AP-261	-	444.4 kcmil 450 FLEX 1100/24	3/8	0.83	1.72	0.26	0.92	

500 kcmil

Compression Connectors / One hole 90°

500 kcmil

Compression Connectors / One hole 90° / 500 kcmil

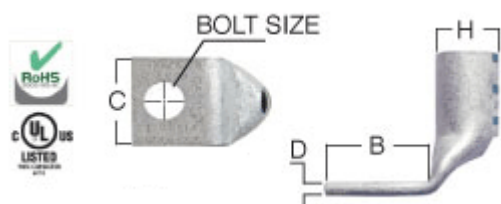

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Pink	-
Panduit	CT-920 CT-930	Pink	P99
Burndy	Y35 Y45	Pink	L99


#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA5112A-251	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.89	0.26	0.63	1.03
2	DA5112A-261	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.08	1.84	0.27	0.98
3	DA5138A-251	-	535.3 kcmil 1325/24 500 kcmil	3/8	1.89	0.26	0.39	1.03
4	DA5138A-261	-	535.3 kcmil 1325/24 500 kcmil	3/8	0.83	1.84	0.27	0.98
5	DA5156A-251	-	535.3 kcmil 1325/24 500 kcmil	5/16	1.89	0.26	0.39	1.03
6	DA5156A-261	-	535.3 kcmil 1325/24 500 kcmil	5/16	0.70	1.84	0.27	0.98
7	DA5158A-241	-	1100/24 = 444 kcmil 500 Weld 59/.0417 427/.0325 703/.0253	5/8	1.58	1.75	0.24	0.96
8	DA5158A-251	-	535.3 kcmil 1325/24 500 kcmil	5/8	1.89	0.26	0.88	1.03
9	DA5158A-261	-	535.3 kcmil 1325/24 500 kcmil	5/8	1.33	1.84	0.27	0.98
10	LA5112AP-251	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.38	1.89	0.26	1.03
11	LA5112AP-261	-	535.3 kcmil 1325/24 500 kcmil	1/2	1.08	1.81	0.27	0.98
12	LA5138AP-251	-	535.3 kcmil 1325/24 500 kcmil	3/8	1.16	1.89	0.26	1.03
13	LA5138AP-261	-	535.3 kcmil 1325/24 500 kcmil	3/8	0.83	1.81	0.27	0.98

650 kcmil

Compression Connectors / One hole 90°

650 kcmil

Compression Connectors / One hole 90° / 650 kcmil

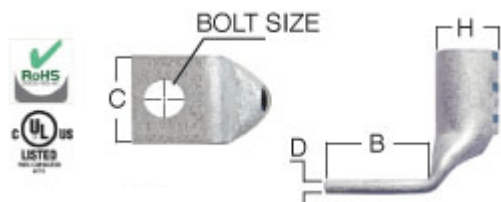

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Black	-
Panduit	CT-920 CT-930	Black	106
Burndy	Y35 Y45	Black	24


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA6512A-251	-	646 kcmil 1600/24	1/2	1.95	0.30	0.63	1.05
2	DA6512A-261	-	646 kcmil 1600/24	1/2	1.08	1.98	0.30	1.05
3	DA6538A-251	-	646 kcmil 1600/24	3/8	1.95	0.30	0.39	1.05
4	DA6538A-261	-	646 kcmil 1600/24	3/8	0.83	1.98	0.30	1.05
5	DA6556A-251	-	646 kcmil 1600/24	5/16	1.95	0.30	0.39	1.05
6	DA6556A-261	-	646 kcmil 1600/24	5/16	0.70	1.98	0.30	1.05
7	DA6558A-251	-	646 kcmil 1600/24	5/8	1.95	0.30	0.88	1.05
8	DA6558A-261	-	646 kcmil 1600/24	5/8	1.33	1.98	0.30	1.05

750 kcmil

Compression Connectors / One hole 90°

750 kcmil

Compression Connectors / One hole 90° / 750 kcmil

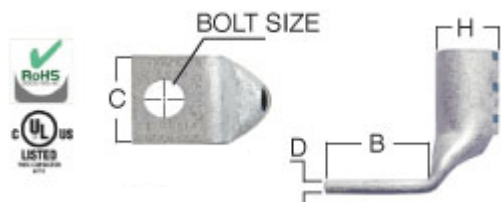

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-920CH	Black	P106
Burndy	Y35 Y45	Black	24


#	Cat.No	Wire Size			Dimension (in.)			
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA7512A-251	-	777.7 kcmil 1925/24	1/2	1.38	2.17	0.32	1.17
2	DA7512A-261	-	777.7 kcmil 1925/24	1/2	1.08	2.19	0.33	1.17
3	DA7558A-251	-	777.7 kcmil 1925/24	5/8	2.03	2.17	0.32	1.17
4	DA7558A-261	-	777.7 kcmil 1925/24	5/8	1.33	2.19	0.33	1.17

4/0 weld

Compression Connectors / One hole 90°

4/0 weld

Compression Connectors / One hole 90° / 4/0 weld

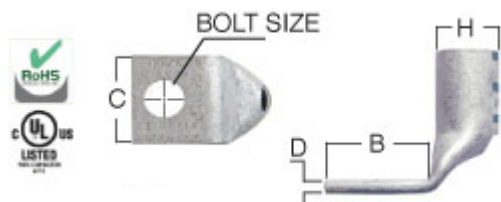

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM6	Yellow	62
Panduit	-	Yellow	-
Burndy	MY29 Y644M	Yellow	16


#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA4012A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.0183	1/2	1.25	1.25	0.15	0.64
2	DA4014A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.0183	1/4	0.78	1.25	0.15	0.64
3	DA4038A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.0183	3/8	0.93	1.25	0.15	0.64
4	DA4056A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.0183	5/16	0.88	1.25	0.15	0.64
5	DA4058A-241	-	4/0 Weld 550/24 = 222 kcmil 133/.0399 259/.0286 637/.0183	5/8	1.58	1.25	0.15	0.64
6	LA4056AP-261	-	550/24 4/0 Weld	5/16	0.70	0.96	0.16	0.64

250 kcmil

Compression Connectors / One hole 90°

250 kcmil

Compression Connectors / One hole 90° / 250 kcmil

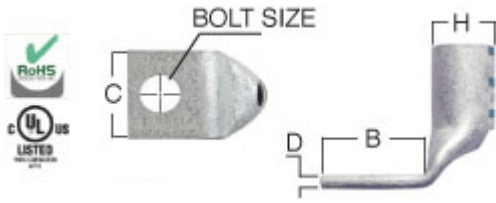

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	-	White	-
Burndy	Y35 Y45	White	17


#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H	
1	DA2512A-241	-	250 Weld 650/24 = 262 kcmil 259/.0311 703/.0189	1/2	1.25	1.25	0.15	0.70	

300 kcmil

Compression Connectors / One hole 90°

300 kcmil

Compression Connectors / One hole 90° / 300 kcmil

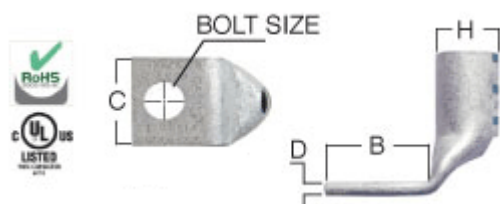

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-980	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size		Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	H
1	DA3112A-241	-	300 Weld 259/.034 427/.0265 889/.0183 775/24 = 313 kcmil	1/2	1.25	1.36	0.18	0.75
2	DA3512A-241	-	350 Weld 259/.0368 427/.0285 703/.0224 889/.0201 373.7 kcmil	1/2	1.25	1.61	0.22	0.79
3	DA3512A-251	-	925/24 350 kcmil	1/2	1.17	1.54	0.22	0.84
4	DA3512A-261	-	925/24 350 kcmil	1/2	1.08	1.55	0.23	0.83
5	DA3538A-251	-	925/24 350 kcmil	3/8	1.01	1.54	0.22	0.84
6	DA3538A-261	-	925/24 350 kcmil	3/8	0.83	1.55	0.23	0.83
7	DA3556A-251	-	925/24 350 kcmil	5/16	0.82	1.54	0.22	0.84
8	DA3556A-261	-	925/24 350 kcmil	5/16	0.70	1.55	0.23	0.83
9	DA3558A-251	-	925/24 350 kcmil	5/8	1.38	1.54	0.22	0.84
10	DA3558A-261	-	925/24 350 kcmil	5/8	1.33	1.55	0.23	0.83
11	LA3512AP-251	-	925/24 350 kcmil	1/2	1.17	1.54	0.22	0.84
12	LA3512AP-261	-	925/24 350 kcmil	1/2	1.08	1.52	0.23	0.83
13	LA3538AP-251	-	925/24 350 kcmil	3/8	1.01	1.54	0.22	0.84
14	LA3538AP-261	-	925/24 350 kcmil	3/8	0.83	1.52	0.23	0.83