

Two hole 0° Catalog

Compression Connectors

CATEGORY EDITION

Table of Contents

Catalog structure and section page index


#14-#10	3
#8 AWG	5
#6AWG	9
#4 AWG	14
#2 AWG	18
#1 AWG	22
1/0 AWG	26
2/0 AWG	30
3/0 AWG	34
4/0 AWG	37
250 kcmil	41
300 kcmil	44
350 kcmil	46
400 kcmil	49
450 kcmil	51
500 kcmil	53
600 kcmil	56
700 kcmil	58
750 kcmil	60
800 kcmil	63
900 kcmil	65
1000 kcmil	67
350 kcmil	69
400 kcmil	71
500 kcmil	73
650 kcmil	75
750 kcmil	77
4/0 weld	79
250 kcmil	81
300 kcmil	83

#14-#10

Compression Connectors / Two hole 0°

#14-#10

Compression Connectors / Two hole 0° / #14-#10

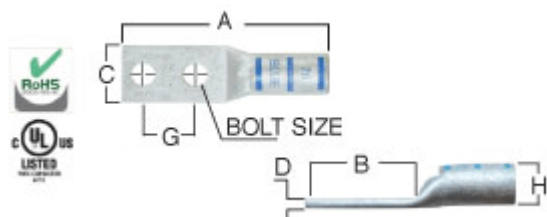

Installation Information

Manufacturer	Tools	Color	Code
T&B	ERG2002	--	-
Panduit	CT-100	--	-
Burndy	Y8MRB-1	--	-


#	Cat.No	Code	Wire Size	Dimension (in.)						
			Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB141058-250	14-10 AWG -		#10	1.70	1.17	0.38	0.06	0.63	0.18
2	DB141401-250	14-10 AWG -		1/4	2.15	1.62	0.42	0.05	1.00	0.18
3	DB141434-250	14-10 AWG -		1/4	1.90	1.37	0.42	0.05	0.75	0.18
4	DB141458-250	14-10 AWG -		1/4	1.78	1.25	0.42	0.05	0.63	0.18
5	DB143801	14-10 AWG -		3/8	2.46	1.81	0.56	0.04	1.00	0.13
6	DB143801-250	14-10 AWG -		3/8	2.37	1.84	0.56	0.04	1.00	0.18
7	LB141058	14-10 AWG -		#10	2.12	1.25	0.37	0.07	0.63	0.18
8	LB141058-34	14-10 AWG -		#10	2.12	1.25	0.37	0.07	0.63	0.18
9	LB141434P-250	14-10 AWG -		1/4	2.05	1.37	0.42	0.05	0.75	0.18
10	LB141434P-260	14-10 AWG -		1/4	2.25	1.39	0.41	0.05	0.75	0.17
11	LB141458	14-10 AWG -		1/4	2.09	1.22	0.50	0.05	0.63	0.18
12	LB141458-34	14-10 AWG -		1/4	2.18	1.31	0.50	0.05	0.63	0.18
13	LB141458P-250	14-10 AWG -		1/4	1.93	1.25	0.42	0.05	0.63	0.18
14	LB141458P-260	14-10 AWG -		1/4	2.13	1.27	0.41	0.05	0.63	0.17
15	WP141058-073	14-10 AWG -		8-10	1.74	1.21	0.36	0.07	0.63	0.17
16	WP143801-187	14-10 AWG -		3/8	2.35	1.82	0.56	0.05	1.00	0.17

#8 AWG

Compression Connectors / Two hole 0°

#8 AWG

Compression Connectors / Two hole 0° / #8 AWG

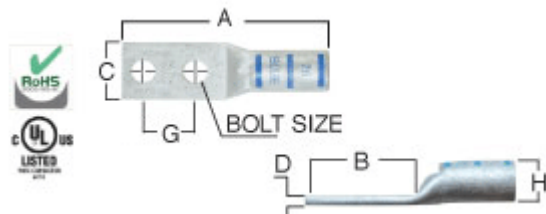


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB081034-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.88	1.27	0.41	0.08	0.75	0.23
2	DB081058	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.85	1.18	0.42	0.08	0.63	0.22
3	DB081058-242	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.85	1.18	0.41	0.06	0.63	0.22
4	DB081058-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.90	1.17	0.41	0.08	0.63	0.23
5	DB081058-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.76	1.17	0.41	0.08	0.63	0.23
6	DB081058-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.76	1.15	0.41	0.63	0.63	0.23
7	DB081058-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.76	1.15	0.41	0.08	0.63	0.23
8	DB081058P	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.85	1.18	0.41	0.06	0.63	0.22
9	DB081243-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/2	3.44	2.83	0.83	0.12	1.75	0.23
10	DB081401-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.35	1.62	0.48	0.07	1.00	0.23
11	DB081401-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.21	1.62	0.48	0.07	1.00	0.23
12	DB081401-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.25	1.64	0.41	0.08	1.00	0.23
13	DB081401-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.25	1.64	0.44	0.08	1.00	0.23
14	DB081434	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.48	1.81	0.56	0.05	0.75	0.22
15	DB081434-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.10	1.37	0.48	0.75	0.75	0.23
16	DB081434-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.96	1.37	0.48	0.07	0.75	0.23
17	DB081434-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.00	1.39	0.41	0.08	0.75	0.23
18	DB081434-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.00	1.39	0.44	0.08	0.75	0.23
19	DB081458	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.98	1.31	0.42	0.08	0.63	0.22
20	DB081458	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.35	1.68	0.42	0.08	1.00	0.22
21	DB081458-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.98	1.25	0.48	0.07	0.63	0.23
22	DB081458-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.84	1.25	0.48	0.07	0.63	0.23
23	DB081458-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.88	1.27	0.41	0.08	0.63	0.23
24	DB081458-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.88	1.27	0.44	0.08	0.63	0.23
25	DB083801	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.48	1.81	0.56	0.05	1.00	0.22
26	DB083801-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.57	1.84	0.60	0.05	1.00	0.23
27	DB083801-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.43	1.84	0.60	0.08	1.00	0.23
28	DB083801-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.44	1.83	0.57	0.06	1.00	0.23
29	DB083801-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.44	1.83	0.58	0.06	1.00	0.23
30	LB081034P-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.16	1.29	0.41	0.08	0.75	0.23

#8 AWG

Compression Connectors / Two hole 0° / #8 AWG

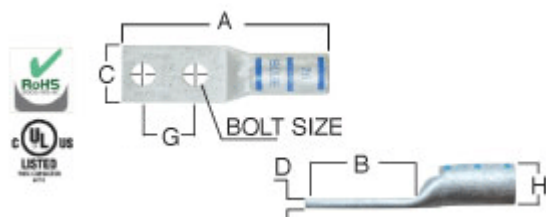


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB081034P-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.16	1.29	0.41	0.08	0.75	0.23
32	LB081034P-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.19	1.27	0.41	0.08	0.75	0.23
33	LB081034P-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.19	1.27	0.41	0.08	0.75	0.23
34	LB081058-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.04	1.17	0.41	0.08	0.63	0.23
35	LB081058P-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.04	1.17	0.41	0.08	0.63	0.23
36	LB081058P-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.04	1.17	0.41	0.08	0.63	0.23
37	LB081058P-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.07	1.15	0.41	0.08	0.63	0.23
38	LB081058P-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	2.07	1.15	0.41	0.08	0.63	0.23
39	LB081401-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.49	1.62	0.48	0.07	1.00	0.23
40	LB081401P-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.49	1.62	0.48	0.07	1.00	0.23
41	LB081401P-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.49	1.62	0.48	0.07	1.00	0.23
42	LB081401P-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.75	1.83	0.44	0.08	1.00	0.23
43	LB081401P-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.56	1.64	0.44	0.08	1.00	0.23
44	LB081434	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.19	1.27	0.47	0.06	0.75	0.22
45	LB081434-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.24	1.37	0.48	0.07	0.75	0.23
46	LB081434P-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.24	1.37	0.48	0.07	0.75	0.23
47	LB081434P-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.24	1.37	0.48	0.07	0.75	0.23
48	LB081434P-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.31	1.39	0.44	0.08	0.75	0.23
49	LB081434P-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.31	1.39	0.44	0.08	0.75	0.23
50	LB081458	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.11	1.19	0.42	0.07	0.63	0.22
51	LB081458-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.12	1.25	0.48	0.07	0.63	0.23
52	LB081458-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.25	1.27	0.40	0.08	0.63	0.23
53	LB081458P-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.12	1.25	0.48	0.07	0.63	0.23
54	LB081458P-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.12	1.25	0.48	0.07	0.63	0.23
55	LB081458P-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.19	1.27	0.44	0.08	0.63	0.23
56	LB081834-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.37	1.39	0.41	0.08	0.75	0.23
57	LB083801	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	3.02	2.10	0.56	0.06	1.00	0.22
58	LB083801-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.71	1.84	0.60	0.05	1.00	0.23
59	LB083801-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.81	1.83	0.73	0.06	1.00	0.23
60	LB083801P-250	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.71	1.84	0.60	0.05	1.00	0.23

#8 AWG

Compression Connectors / Two hole 0° / #8 AWG

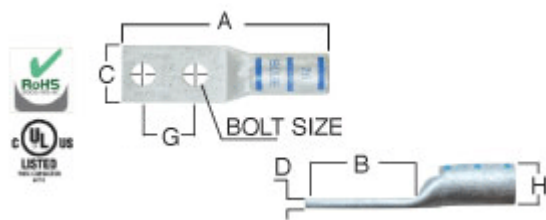

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Red	21
Panduit	CT-720 CT-920	Red	P21
Burndy	Y1MR Y2MR	Red	49


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
61	LB083801P-251	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.71	1.84	0.60	0.05	1.00	0.23
62	LB083801P-260	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.75	1.83	0.58	0.06	1.00	0.23
63	LB083801P-261	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.75	1.83	0.58	0.06	1.00	0.23
64	WP081058-052	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.69	1.06	0.41	0.08	0.63	0.22
65	WP081058-100	8 AWG	#8 Weld 37/24 = 14.9 kcmil	#10	1.80	1.14	0.41	0.08	0.63	0.22
66	WP081401-101	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.26	1.62	0.41	0.08	1.00	0.22
67	WP081458-075	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	1.80	1.18	0.41	0.08	0.63	0.22
68	WP081834-103	8 AWG	#8 Weld 37/24 = 14.9 kcmil	1/4	2.01	1.37	0.41	0.08	0.75	0.22
69	WP083801-102	8 AWG	#8 Weld 37/24 = 14.9 kcmil	3/8	2.48	1.83	0.59	0.05	1.00	0.22

#6AWG

Compression Connectors / Two hole 0°

#6AWG

Compression Connectors / Two hole 0° / #6AWG

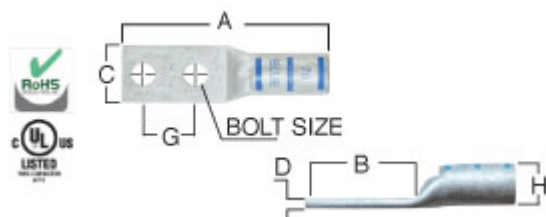


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB061001-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.55	1.54	0.46	0.08	1.00	0.27
2	DB061012	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.98	1.28	0.44	0.08	0.50	0.26
3	DB061012-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.03	1.02	0.42	0.09	0.50	0.26
4	DB061012-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.72	1.02	0.48	0.08	0.50	0.27
5	DB061016-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.91	1.21	0.44	0.07	0.69	0.27
6	DB061021-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.72	2.04	0.46	0.08	1.50	0.27
7	DB061034-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.3	1.29	0.46	0.08	0.75	0.27
8	DB061034-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.97	1.29	0.46	0.08	0.75	0.27
9	DB061034-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.97	1.27	0.48	0.08	0.75	0.27
10	DB061058-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.18	1.17	0.46	0.08	0.63	0.27
11	DB061058-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.85	1.17	0.46	0.08	0.63	0.27
12	DB061058-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.16	1.15	0.42	0.09	0.63	0.26
13	DB061058-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.85	1.15	0.44	0.07	0.63	0.27
14	DB061058-34	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.89	1.19	0.44	0.08	0.63-0.75	0.26
15	DB061069-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.91	1.23	0.46	0.08	0.69	0.27
16	DB061243-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	3.84	2.83	0.81	0.12	1.75	0.26
17	DB061243-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	3.53	2.83	0.83	0.12	1.75	0.27
18	DB061401	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.33	1.63	0.55	0.08	1.00	0.26
19	DB061401-242	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.45	1.75	0.43	0.08	1.00	0.26
20	DB061401-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.63	1.62	0.48	0.08	1.00	0.27
21	DB061401-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.3	1.62	0.48	0.08	1.00	0.27
22	DB061401-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.65	1.64	0.45	0.08	1.00	0.26
23	DB061401-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.34	1.64	0.48	0.08	1.00	0.27
24	DB061412	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.01	1.31	0.43	0.08	0.50	0.26
25	DB061412-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.15	1.14	0.45	0.08	0.50	0.26
26	DB061434	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.13	1.43	0.43	0.08	0.75	0.26
27	DB061434-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.38	1.37	0.48	0.08	0.75	0.27
28	DB061434-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.05	1.37	0.48	0.08	0.75	0.27
29	DB061434-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.4	1.39	0.44	0.08	0.75	0.26
30	DB061434-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.09	1.39	0.48	0.08	0.75	0.27

#6AWG

Compression Connectors / Two hole 0° / #6AWG

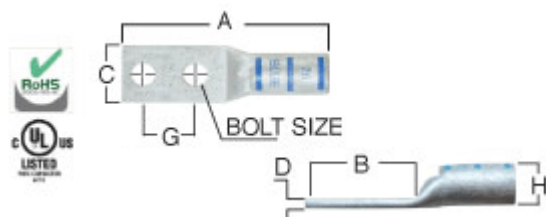


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	DB061458	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.98	1.28	0.44	0.08	0.63	0.26
32	DB061458-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.26	1.25	0.48	0.08	0.63	0.27
33	DB061458-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.93	1.25	0.48	0.08	0.63	0.27
34	DB061458-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.28	1.27	0.45	0.08	0.63	0.26
35	DB061458-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.97	1.27	0.48	0.08	0.63	0.27
36	DB062112-58	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#12	1.89	1.19	0.44	0.11	0.50-0.63	0.26
37	DB063801	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.51	1.81	0.55	0.08	1.00	0.26
38	DB063801-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.85	1.84	0.62	0.06	1.00	0.27
39	DB063801-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.52	1.84	0.62	0.06	1.00	0.27
40	DB063801-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.84	1.83	0.63	0.06	1.00	0.26
41	DB063801-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.53	1.83	0.58	0.06	1.00	0.27
42	DB065601-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	2.75	1.74	0.56	0.07	1.00	0.27
43	DB065601-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	2.42	1.74	0.56	0.07	1.00	0.27
44	DB065601-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	2.71	1.7	0.52	0.07	1.00	0.26
45	DB065601-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	2.40	1.70	0.52	0.07	1.00	0.27
46	DB065634-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	2.46	1.45	0.52	0.07	0.75	0.26
47	LB061034P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.56	1.29	0.46	0.08	0.75	0.27
48	LB061034P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.56	1.29	0.46	0.08	0.75	0.27
49	LB061034P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.59	1.27	0.42	0.09	0.75	0.26
50	LB061034P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.22	1.27	0.48	0.08	0.75	0.27
51	LB061058-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.44	1.17	0.46	0.08	0.63	0.27
52	LB061058P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	2.44	1.17	0.46	0.08	0.63	0.27
53	LB061243	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	4.00	3.00	0.88	0.11	1.75	0.26
54	LB061243-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	4.28	3.01	0.81	0.16	1.75	0.27
55	LB061243-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	4.15	2.83	0.81	0.12	1.75	0.26
56	LB061243P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	4.4	3.13	0.75	0.16	1.75	0.27
57	LB061243P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/2	4.15	2.83	0.83	0.12	1.75	0.26
58	LB061401	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.63	1.63	0.43	0.08	1.00	0.26
59	LB061401-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.89	1.62	0.48	0.08	1.00	0.27
60	LB061401-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.96	1.64	0.45	0.08	1.00	0.26

#6AWG

Compression Connectors / Two hole 0° / #6AWG

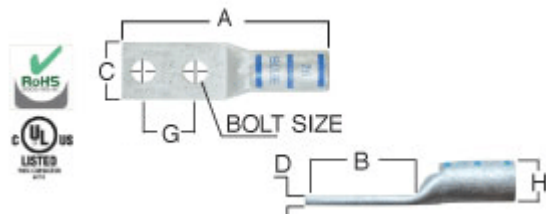


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
61	LB061401P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.89	1.62	0.48	0.08	1.00	0.27
62	LB061401P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.89	1.62	0.48	0.08	1.00	0.27
63	LB061401P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.96	1.64	0.45	0.08	1.00	0.26
64	LB061401P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.59	1.64	0.48	0.08	1.00	0.27
65	LB061412P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.39	1.12	0.48	0.08	0.50	0.27
66	LB061434	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.43	1.43	0.43	0.08	0.75	0.26
67	LB061434-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.64	1.37	0.48	0.08	0.75	0.27
68	LB061434-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.71	1.39	0.45	0.08	0.75	0.26
69	LB061434P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.64	1.37	0.48	0.08	0.75	0.27
70	LB061434P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.64	1.37	0.48	0.08	0.75	0.27
71	LB061434P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.71	1.39	0.45	0.08	0.75	0.26
72	LB061434P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.34	1.39	0.48	0.08	0.75	0.27
73	LB061441P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	3.14	1.87	0.48	0.08	1.25	0.27
74	LB061443P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	3.64	2.37	0.48	0.08	1.75	0.27
75	LB061458	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.28	1.28	0.44	0.08	0.63	0.26
76	LB061458-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.52	1.25	0.48	0.08	0.63	0.27
77	LB061458-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.59	1.27	0.45	0.08	0.63	0.26
78	LB061458P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.52	1.25	0.48	0.08	0.63	0.27
79	LB061458P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.52	1.25	0.48	0.08	0.63	0.27
80	LB061458P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.59	1.27	0.45	0.08	0.63	0.26
81	LB061458P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.22	1.27	0.48	0.08	0.63	0.27
82	LB063801	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.93	1.93	0.59	0.06	1.00	0.26
83	LB063801-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.11	1.84	0.62	0.06	1.00	0.27
84	LB063801-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.15	1.83	0.63	0.06	1.00	0.26
85	LB063801P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.11	1.84	0.62	0.06	1.00	0.27
86	LB063801P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.11	1.84	0.62	0.06	1.00	0.27
87	LB063801P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.15	1.83	0.58	0.06	1.00	0.26
88	LB063801P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.78	1.83	0.58	0.06	1.00	0.27
89	LB063834-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.9	1.58	0.63	0.06	0.75	0.26
90	LB063834P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.86	1.59	0.62	0.06	0.75	0.27

#6AWG

Compression Connectors / Two hole 0° / #6AWG

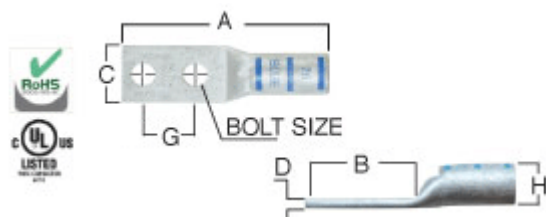

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Blue	24
Panduit	CT-720 CT-1700	Blue	P24
Burndy	Y1MR MY29	Blue	7


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
91	LB063834P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.9	1.58	0.58	0.06	0.75	0.26
92	LB063834P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.53	1.58	0.58	0.06	0.75	0.27
93	LB063858P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.74	1.47	0.62	0.06	0.63	0.27
94	LB063878-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.03	1.71	0.63	0.06	0.88	0.26
95	LB063878P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.99	1.72	0.62	0.06	0.88	0.27
96	LB063878P-251	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.99	1.72	0.62	0.06	0.88	0.27
97	LB063878P-260	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	3.03	1.71	0.58	0.06	0.88	0.26
98	LB063878P-261	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.66	1.71	0.58	0.06	0.88	0.27
99	LB065634P-250	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	5/16	2.76	1.49	0.56	0.07	0.75	0.27
100	WP061058-108	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	#10	1.80	1.15	0.44	0.09	0.63	0.26
101	WP061401-109	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	2.26	1.61	0.44	0.09	1.00	0.26
102	WP061434-110	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.80	1.15	0.44	0.09	0.75	0.26
103	WP061458-003	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	1/4	1.80	1.15	0.44	0.09	0.63	0.26
104	WP063801-111	#6 AWG	#6 Weld 61/24 = 24.6 kcmil	3/8	2.24	1.59	0.59	0.07	1.00	0.26

#4 AWG

Compression Connectors / Two hole 0°

#4 AWG

Compression Connectors / Two hole 0° / #4 AWG

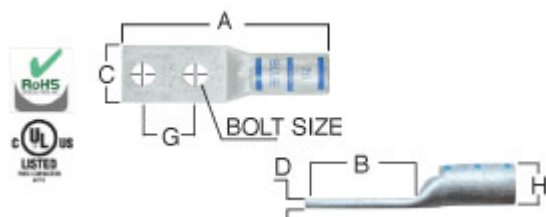


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB041001-261	#4 AWG	105/24 #4 Weld	#10	2.27	1.52	0.41	0.09	1.00	0.33
2	DB041034-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.35	1.29	0.55	0.09	0.75	0.33
3	DB041058-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.23	1.17	0.55	0.09	0.63	0.33
4	DB041058-261	#4 AWG	105/24 #4 Weld	#10	1.90	1.15	0.41	0.09	0.63	0.33
5	DB041243-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	3.89	2.83	0.83	0.12	1.75	0.30
6	DB041243-261	#4 AWG	105/24 #4 Weld	1/2	3.58	2.83	0.83	0.12	1.75	0.33
7	DB041401-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.68	1.62	0.55	0.09	1.00	0.33
8	DB041401-251	#4 AWG	105/24 #4 Weld	1/4	2.40	1.70	0.55	0.09	1.00	0.33
9	DB041401-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.70	1.64	0.49	0.09	1.00	0.30
10	DB041401-261	#4 AWG	105/24 #4 Weld	1/4	2.39	1.64	0.55	0.09	1.00	0.33
11	DB041434-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.43	1.37	0.55	0.09	0.75	0.33
12	DB041434-251	#4 AWG	105/24 #4 Weld	1/4	2.15	1.45	0.55	0.09	0.75	0.33
13	DB041434-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.45	1.39	0.49	0.09	0.75	0.30
14	DB041434-261	#4 AWG	105/24 #4 Weld	1/4	2.14	1.39	0.55	0.09	0.75	0.33
15	DB041458	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.03	1.28	0.52	0.10	0.63	0.32
16	DB041458-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.31	1.25	0.55	0.09	0.63	0.33
17	DB041458-251	#4 AWG	105/24 #4 Weld	1/4	2.03	1.33	0.55	0.09	0.63	0.33
18	DB041458-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.33	1.27	0.49	0.09	0.63	0.30
19	DB041458-261	#4 AWG	105/24 #4 Weld	1/4	2.02	1.27	0.55	0.09	0.63	0.33
20	DB043801	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.56	1.81	0.59	0.09	1.00	0.32
21	DB043801-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.90	1.84	0.62	0.08	1.00	0.33
22	DB043801-251	#4 AWG	105/24 #4 Weld	3/8	2.62	1.81	0.62	0.08	1.00	0.33
23	DB043801-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	2.89	1.83	0.58	0.08	1.00	0.30
24	DB043801-261	#4 AWG	105/24 #4 Weld	3/8	2.58	1.83	0.58	0.08	1.00	0.33
25	DB045601	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	2.38	1.63	0.52	0.10	1.00	0.32
26	DB045601-251	#4 AWG	105/24 #4 Weld	5/16	2.52	1.75	0.55	0.09	1.00	0.33
27	DB045601-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	5/16	2.76	1.70	0.52	0.09	1.00	0.30
28	DB045601-261	#4 AWG	105/24 #4 Weld	5/16	2.45	1.70	0.55	0.09	1.00	0.33
29	LB041034P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.59	1.29	0.55	0.09	0.75	0.33
30	LB041034P-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.64	1.27	0.49	0.09	0.75	0.30

#4 AWG

Compression Connectors / Two hole 0° / #4 AWG

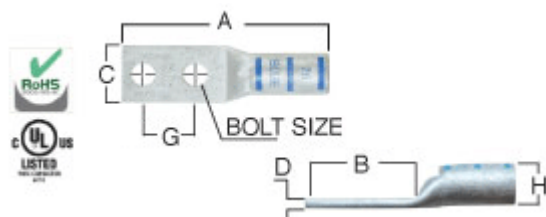


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8

#	Cat.No	Wire Size			Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
31	LB041058P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	#10	2.47	1.17	0.55	0.09	0.63	0.33	
32	LB041243	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.05	3.00	0.88	0.09	1.75	0.32	
33	LB041243-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.39	3.01	0.84	0.16	1.75	0.33	
34	LB041243-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.20	2.83	0.81	0.12	1.75	0.30	
35	LB041243P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.51	3.13	0.75	0.16	1.75	0.33	
36	LB041243P-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/2	4.20	2.83	0.83	0.12	1.75	0.30	
37	LB041401	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.93	1.88	0.58	0.09	1.00	0.32	
38	LB041401P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.92	1.62	0.55	0.09	1.00	0.33	
39	LB041434	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.36	1.31	0.56	0.09	0.75	0.32	
40	LB041434-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.67	1.37	0.55	0.09	0.75	0.33	
41	LB041434-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.76	1.39	0.50	0.09	0.75	0.30	
42	LB041434P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.68	1.38	0.55	0.09	0.75	0.33	
43	LB041434P-251	#4 AWG	105/24 #4 Weld	1/4	2.67	1.37	0.55	0.09	0.75	0.33	
44	LB041434P-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.76	1.39	0.49	0.09	0.75	0.30	
45	LB041434P-261	#4 AWG	105/24 #4 Weld	1/4	2.89	1.39	0.55	0.09	0.75	0.33	
46	LB041458	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.24	1.19	0.52	0.10	0.63	0.32	
47	LB041458-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.55	1.25	0.55	0.09	0.63	0.33	
48	LB041458-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.64	1.27	0.50	0.09	0.63	0.30	
49	LB041458P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.56	1.26	0.55	0.09	0.63	0.33	
50	LB041458P-251	#4 AWG	105/24 #4 Weld	1/4	2.55	1.25	0.55	0.09	0.63	0.33	
51	LB041458P-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	1/4	2.64	1.27	0.49	0.09	0.63	0.30	
52	LB041458P-261	#4 AWG	105/24 #4 Weld	1/4	2.77	1.27	0.55	0.09	0.63	0.33	
53	LB043801	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.03	1.98	0.59	0.09	1.00	0.32	
54	LB043801-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.14	1.84	0.62	0.08	1.00	0.33	
55	LB043801-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.20	1.83	0.56	0.08	1.00	0.30	
56	LB043801P-250	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.14	1.84	0.62	0.08	1.00	0.33	
57	LB043801P-251	#4 AWG	105/24 #4 Weld	3/8	3.14	1.84	0.62	0.08	1.00	0.33	
58	LB043801P-260	#4 AWG	40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029	3/8	3.20	1.83	0.58	0.08	1.00	0.30	
59	LB043801P-261	#4 AWG	105/24 #4 Weld	3/8	3.33	1.83	0.58	0.08	1.00	0.33	
60	LB043834P-251	#4 AWG	105/24 #4 Weld	3/8	2.89	1.59	0.62	0.08	0.75	0.33	

#4 AWG

Compression Connectors / Two hole 0° / #4 AWG

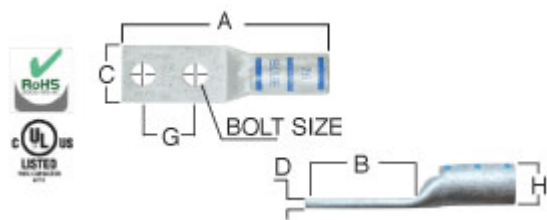

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Gray	29
Panduit	CT-720 CT-920	Gray	P29
Burndy	Y1MR Y2MR	Gray	8


#	Cat.No	Wire Size		Dimension (in.)							
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
61	LB043834P-261	#4 AWG 105/24 #4 Weld		3/8	3.08	1.58	0.58	0.08	0.75	0.33	
62	LB045601	#4 AWG 40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029		5/16	2.80	1.75	0.56	0.10	1.00	0.32	
63	WP041434-117	#4 AWG 40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029		1/4	2.35	1.148	0.55	0.09	0.75	0.33	
64	WP041458-005	#4 AWG 40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029		1/4	2.35	1.15	0.55	0.09	0.63	0.33	
65	WP043801-116	#4 AWG 40-50 Navy 91/24 = 36.7 kcmil 133/.0177 49/.029		3/8	2.51	1.71	0.55	0.09	1.00	0.33	

#2 AWG

Compression Connectors / Two hole 0°

#2 AWG

Compression Connectors / Two hole 0° / #2 AWG

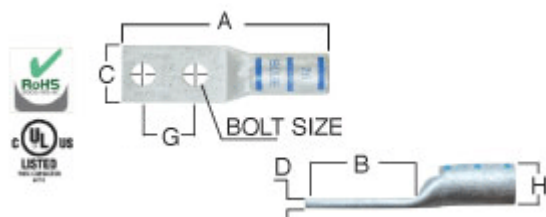


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10

#	Cat.No	Wire Size			Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
1	DB021243	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.73	2.88	0.75	0.09	1.75	0.36	
2	DB021243-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.14	3.01	0.75	0.08	1.75	0.37	
3	DB021243-251	#2 AWG	150/24 #2 Weld	1/2	3.85	2.80	0.75	0.09	1.75	0.42	
4	DB021243-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	3.96	2.83	0.83	0.11	1.75	0.36	
5	DB021243-261	#2 AWG	150/24 #2 Weld	1/2	3.71	2.83	0.83	0.08	1.75	0.41	
6	DB021401	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.38	1.53	0.59	0.11	1.00	0.36	
7	DB021401-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.76	1.63	0.60	0.10	1.00	0.37	
8	DB021401-251	#2 AWG	150/24 #2 Weld	1/4	2.47	1.8	0.70	0.11	1.00	0.42	
9	DB021401-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.77	1.64	0.60	0.11	1.00	0.36	
10	DB021401-261	#2 AWG	150/24 #2 Weld	1/4	2.52	1.64	0.68	0.10	1.00	0.41	
11	DB021434	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.16	1.31	0.59	0.13	0.75	0.36	
12	DB021434-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.51	1.38	0.60	0.10	0.75	0.37	
13	DB021434-251	#2 AWG	150/24 #2 Weld	1/4	2.22	1.55	0.70	0.11	0.75	0.42	
14	DB021434-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.52	1.39	0.60	0.11	0.75	0.36	
15	DB021434-261	#2 AWG	150/24 #2 Weld	1/4	2.27	1.39	0.68	0.10	0.75	0.41	
16	DB021458	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.13	1.28	0.59	0.11	0.63	0.36	
17	DB021458-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.39	1.26	0.60	0.10	0.63	0.37	
18	DB021458-251	#2 AWG	150/24 #2 Weld	1/4	2.10	1.43	0.70	0.11	0.63	0.42	
19	DB021458-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.40	1.27	0.60	0.11	0.625	0.36	
20	DB021458-261	#2 AWG	150/24 #2 Weld	1/4	2.15	1.27	0.68	0.10	0.625	0.41	
21	DB023801	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.66	1.81	0.60	0.10	1.00	0.36	
22	DB023801-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.99	1.86	0.66	0.10	1.00	0.37	
23	DB023801-251	#2 AWG	150/24 #2 Weld	3/8	2.67	1.89	0.70	0.11	1.00	0.42	
24	DB023801-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.96	1.83	0.60	0.11	1.00	0.36	
25	DB023801-261	#2 AWG	150/24 #2 Weld	3/8	2.71	1.83	0.68	0.10	1.00	0.41	
26	DB025601-251	#2 AWG	150/24 #2 Weld	5/16	2.60	1.86	0.70	0.11	1.00	0.42	
27	DB025601-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.83	1.70	0.60	0.11	1.00	0.36	
28	DB025601-261	#2 AWG	150/24 #2 Weld	5/16	2.58	1.70	0.68	0.10	1.00	0.41	
29	DB025634-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.64	1.51	0.66	0.10	0.75	0.37	
30	DB025634-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.58	1.45	0.60	0.11	0.75	0.36	

#2 AWG

Compression Connectors / Two hole 0° / #2 AWG

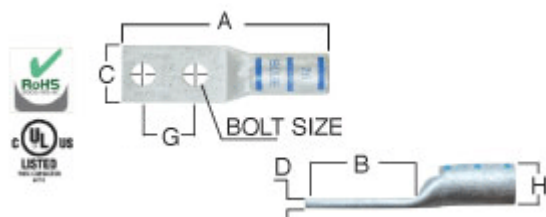


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10

#	Cat.No	Wire Size			Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
31	LB021034P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	2.70	1.29	0.60	0.10	0.75	0.37	
32	LB021034P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	2.77	1.27	0.60	0.11	0.75	0.36	
33	LB021058P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	#10	2.58	1.17	0.60	0.10	0.63	0.37	
34	LB021243	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.03	2.88	0.75	0.09	1.75	0.36	
35	LB021243-242	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.15	3	0.88	0.11	1.75	0.36	
36	LB021243-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.42	3.01	0.75	0.08	1.75	0.37	
37	LB021243-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.33	2.83	0.81	0.12	1.75	0.36	
38	LB021243P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.42	3.01	0.75	0.08	1.75	0.37	
39	LB021243P-251	#2 AWG	150/24 #2 Weld	1/2	4.62	3.01	0.75	0.09	1.75	0.42	
40	LB021243P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/2	4.33	2.83	0.83	0.12	1.75	0.36	
41	LB021243P-261	#2 AWG	150/24 #2 Weld	1/2	4.46	2.83	0.83	0.10	1.75	0.41	
42	LB021401	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	3.03	1.88	0.67	0.09	1.00	0.36	
43	LB021401P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	3.04	1.63	0.60	0.10	1.00	0.37	
44	LB021401P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	3.14	1.64	0.60	0.11	1.00	0.36	
45	LB021434	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.50	1.35	0.68	0.11	0.75	0.36	
46	LB021434-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.79	1.38	0.60	0.10	0.75	0.37	
47	LB021434-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.89	1.39	0.60	0.11	0.75	0.36	
48	LB021434P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.79	1.38	0.60	0.10	0.75	0.37	
49	LB021434P-251	#2 AWG	150/24 #2 Weld	1/4	2.99	1.38	0.70	0.11	0.75	0.42	
50	LB021434P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.89	1.39	0.60	0.11	0.75	0.36	
51	LB021434P-261	#2 AWG	150/24 #2 Weld	1/4	3.02	1.39	0.68	0.10	0.75	0.41	
52	LB021458	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.43	1.28	0.59	0.11	0.625	0.36	
53	LB021458-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.67	1.26	0.60	0.10	0.625	0.37	
54	LB021458-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.77	1.27	0.60	0.11	0.63	0.36	
55	LB021458P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.67	1.26	0.60	0.10	0.63	0.37	
56	LB021458P-251	#2 AWG	150/24 #2 Weld	1/4	2.87	1.26	0.70	0.11	0.63	0.42	
57	LB021458P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.77	1.27	0.60	0.11	0.63	0.36	
58	LB021458P-261	#2 AWG	150/24 #2 Weld	1/4	2.90	1.27	0.68	0.10	0.63	0.41	
59	LB023801	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.09	1.94	0.59	0.11	1.00	0.36	
60	LB023801-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.24	1.83	0.66	0.10	1.00	0.37	

#2 AWG

Compression Connectors / Two hole 0° / #2 AWG

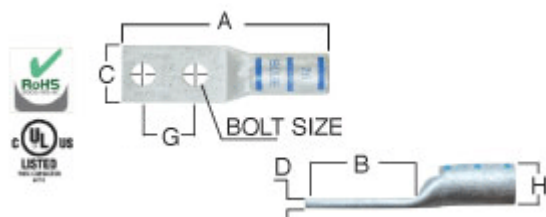

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Brown	33
Panduit	CT-720 CT-1700	Brown	P33
Burndy	Y1MR MY29	Brown	10


#	Cat.No	Wire Size			Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
61	LB023801-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.33	1.83	0.60	0.11	1.00	0.36	
62	LB023801P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.24	1.83	0.66	0.10	1.00	0.37	
63	LB023801P-251	#2 AWG	150/24 #2 Weld	3/8	3.44	1.83	0.70	0.11	1.00	0.42	
64	LB023801P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.33	1.83	0.60	0.11	1.00	0.36	
65	LB023801P-261	#2 AWG	150/24 #2 Weld	3/8	3.46	1.83	0.68	0.10	1.00	0.41	
66	LB023834-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.08	1.58	0.60	0.11	0.75	0.36	
67	LB023834P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.99	1.58	0.66	0.10	0.75	0.37	
68	LB023834P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.08	1.58	0.60	0.11	0.75	0.36	
69	LB023843	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.72	2.57	0.59	0.11	1.75	0.36	
70	LB023843-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.99	2.58	0.66	0.10	1.75	0.37	
71	LB023843-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	4.08	2.58	0.60	0.11	1.75	0.36	
72	LB023843P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.99	2.58	0.66	0.10	1.75	0.37	
73	LB023843P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	4.08	2.58	0.60	0.11	1.75	0.36	
74	LB023878-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.21	1.71	0.60	0.11	0.88	0.36	
75	LB023878P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.12	1.71	0.66	0.10	0.88	0.37	
76	LB023878P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	3.21	1.71	0.60	0.11	0.88	0.36	
77	LB025634	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.78	1.63	0.59	0.11	0.75	0.36	
78	LB025634-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.92	1.51	0.66	0.10	0.75	0.37	
79	LB025634-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.95	1.45	0.60	0.11	0.75	0.36	
80	LB025634P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.92	1.51	0.66	0.10	0.75	0.37	
81	LB025634P-260	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	2.95	1.45	0.60	0.11	0.75	0.36	
82	LB025678-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	3.05	1.64	0.66	0.10	0.88	0.37	
83	LB025678P-250	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	5/16	3.05	1.64	0.66	0.10	0.88	0.37	
84	WP021434-122	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.25	1.15	0.59	0.11	0.75	0.36	
85	WP021458-054	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	1/4	2.25	1.15	0.59	0.11	0.625	0.36	
86	WP023801-121	#2 AWG	60 Navy #4 Weld 125/24 = 50.5 kcmil	3/8	2.60	1.71	0.59	0.11	1.00	0.36	

#1 AWG

Compression Connectors / Two hole 0°

#1 AWG

Compression Connectors / Two hole 0° / #1 AWG

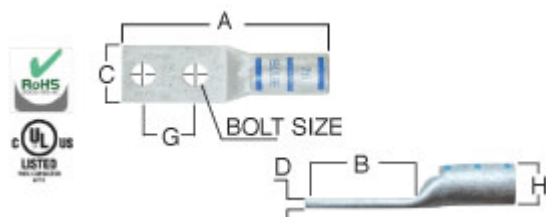


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11

#	Cat.No	Code	Wire Size	Dimension (in.)						
			Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB011243-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	4.14	3.01	0.75	0.09	1.75	0.42
2	DB011243-251	#1 AWG	225/24 #1 Weld	1/2	3.85	2.77	0.80	0.12	1.75	0.46
3	DB011243-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	3.96	2.83	0.81	0.12	1.75	0.41
4	DB011243-261	#1 AWG	225/24 #1 Weld	1/2	3.77	2.83	0.83	0.11	1.75	0.45
5	DB011401-251	#1 AWG	225/24 #1 Weld	1/4	2.61	1.84	0.76	0.12	1.00	0.46
6	DB011401-261	#1 AWG	225/24 #1 Weld	1/4	2.58	1.64	0.75	0.12	1.00	0.45
7	DB011434-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.51	1.38	0.70	0.11	0.75	0.42
8	DB011434-251	#1 AWG	225/24 #1 Weld	1/4	2.36	1.59	0.76	0.12	0.75	0.46
9	DB011434-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.52	1.39	0.68	0.10	0.75	0.41
10	DB011434-261	#1 AWG	225/24 #1 Weld	1/4	2.33	1.39	0.75	0.12	0.75	0.45
11	DB011458	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.13	1.28	0.68	0.11	0.625	0.41
12	DB011458-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.39	1.26	0.70	0.11	0.63	0.42
13	DB011458-251	#1 AWG	225/24 #1 Weld	1/4	2.24	1.47	0.76	0.12	0.63	0.46
14	DB011458-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.40	1.27	0.68	0.10	0.63	0.41
15	DB011458-261	#1 AWG	225/24 #1 Weld	1/4	2.21	1.27	0.75	0.12	0.63	0.45
16	DB013801	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	2.66	1.81	0.68	0.11	1.00	0.41
17	DB013801-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	2.96	1.83	0.70	0.11	1.00	0.42
18	DB013801-251	#1 AWG	225/24 #1 Weld	3/8	2.74	1.93	0.76	0.12	1.00	0.46
19	DB013801-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	2.96	1.83	0.68	0.10	1.00	0.41
20	DB013801-261	#1 AWG	225/24 #1 Weld	3/8	2.77	1.83	0.75	0.12	1.00	0.45
21	DB015601	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	2.47	1.62	0.69	0.13	1.00	0.41
22	DB015601-251	#1 AWG	225/24 #1 Weld	5/16	2.67	1.90	0.76	0.12	1.00	0.46
23	DB015601-261	#1 AWG	225/24 #1 Weld	5/16	2.64	1.70	0.75	0.12	1.00	0.45
24	DB015678-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	2.77	1.64	0.70	0.11	0.88	0.42
25	DB015678-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	2.71	1.58	0.68	0.10	0.875	0.41
26	LB011243	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	4.13	3.00	0.88	0.11	1.75	0.42
27	LB011243-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	4.62	3.01	0.75	0.09	1.75	0.42
28	LB011243-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	4.46	2.83	0.81	0.12	1.75	0.41
29	LB011243P-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	4.62	3.01	0.75	0.09	1.75	0.42
30	LB011243P-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/2	4.46	2.83	0.83	0.12	1.75	0.41

#1 AWG

Compression Connectors / Two hole 0° / #1 AWG

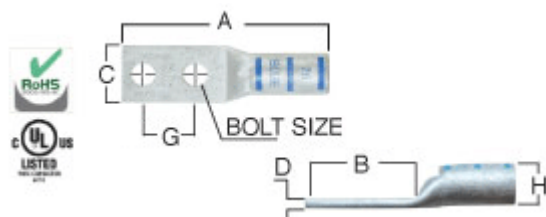


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB011401P-251	#1 AWG	225/24 #1 Weld	1/4	3.39	1.70	0.76	0.12	1.00	0.46
32	LB011401P-261	#1 AWG	225/24 #1 Weld	1/40	3.27	1.64	0.75	0.12	1.00	0.45
33	LB011434	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.53	1.40	0.67	0.11	0.75	0.41
34	LB011434-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.99	1.38	0.70	0.11	0.75	0.42
35	LB011434-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	3.02	1.39	0.75	0.10	0.75	0.41
36	LB011434P-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.99	1.38	0.70	0.11	0.75	0.42
37	LB011434P-251	#1 AWG	225/24 #1 Weld	1/4	3.14	1.45	0.76	0.12	0.75	0.46
38	LB011434P-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	3.02	1.39	0.67	0.10	0.75	0.41
39	LB011434P-261	#1 AWG	225/24 #1 Weld	1/40	3.02	1.39	0.75	0.12	0.75	0.45
40	LB011458	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.71	1.58	0.67	0.11	0.625	0.41
41	LB011458-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.87	1.26	0.70	0.11	0.63	0.42
42	LB011458-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.90	1.27	0.68	0.10	0.625	0.41
43	LB011458P-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.87	1.26	0.70	0.11	0.63	0.42
44	LB011458P-251	#1 AWG	225/24 #1 Weld	1/4	3.02	1.33	0.76	0.12	0.63	0.46
45	LB011458P-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	1/4	2.90	1.27	0.67	0.1	0.63	0.41
46	LB011458P-261	#1 AWG	225/24 #1 Weld	1/40	2.90	1.27	0.75	0.12	0.63	0.45
47	LB013801	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	3.11	1.98	0.67	0.11	1.00	0.41
48	LB013801-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	3.44	1.83	0.70	0.11	1.00	0.42
49	LB013801-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	3.46	1.83	0.68	0.10	1.00	0.41
50	LB013801P-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	3.44	1.83	0.70	0.11	1.00	0.42
51	LB013801P-251	#1 AWG	225/24 #1 Weld	3/8	3.52	1.83	0.76	0.12	1.00	0.46
52	LB013801P-260	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	3/8	3.46	1.83	0.67	0.10	1.00	0.41
53	LB013801P-261	#1 AWG	225/24 #1 Weld	3/80	3.46	1.83	0.75	0.12	1.00	0.45
54	LB015601P-251	#1 AWG	225/24 #1 Weld	5/16	3.45	1.76	0.76	0.12	1.00	0.46
55	LB015601P-261	#1 AWG	225/24 #1 Weld	5/160	3.33	1.70	0.75	0.12	1.00	0.45
56	LB015634-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	3.12	1.51	0.70	0.11	0.75	0.42
57	LB015634P-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	3.12	1.51	0.70	0.11	0.75	0.42
58	LB015678	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	2.76	1.63	0.67	0.11	0.88	0.41
59	LB015678-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	3.25	1.64	0.70	0.11	0.88	0.42
60	LB015678P-250	#1 AWG	75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223	5/16	3.25	1.64	0.70	0.11	0.88	0.42

#1 AWG

Compression Connectors / Two hole 0° / #1 AWG

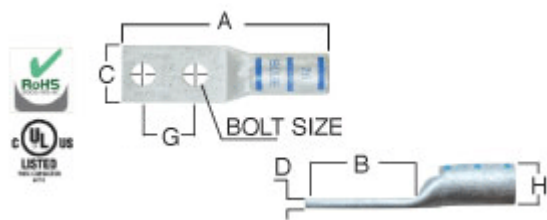

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Green	37
Panduit	CT-720 CT-1700	Green	P37
Burndy	MY29 Y644M	Green	11


#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
61	LB015678P-251	#1 AWG 225/24 #1 Weld		5/16	3.33	1.64	0.76	0.12	0.88	0.46
62	LB015678P-261	#1 AWG 225/24 #1 Weld		5/16	3.21	1.58	0.75	0.12	0.88	0.45
63	WP011458-008	#1 AWG 75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223		1/4	2.31	1.15	0.68	0.11	0.625	0.41
64	WP013801-176	#1 AWG 75 Navy #2 Weld 150/24 = 60.5 kcmil 175/24 = 70.6 kcmil 133/.0223		3/8	2.71	1.82	0.68	0.11	1.00	0.41

1/0 AWG

Compression Connectors / Two hole 0°

1/0 AWG

Compression Connectors / Two hole 0° / 1/0 AWG

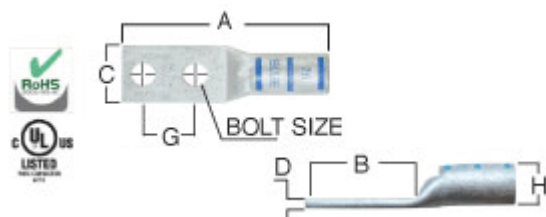


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB101201-251	1/0 AWG 275/24 1/0 Weld		1/2	3.06	2.11	0.85	0.13	1.00	0.52
2	DB101201-261	1/0 AWG 275/24 1/0 Weld		1/2	3.02	2.08	0.83	0.12	1.00	0.5
3	DB101243	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/2	3.78	2.83	0.75	0.13	1.75	0.46
4	DB101243-250	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/2	4.20	3.01	0.80	0.12	1.75	0.46
5	DB101243-251	1/0 AWG 275/24 1/0 Weld		1/2	3.98	2.90	0.85	0.13	1.75	0.52
6	DB101243-260	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/2	3.96	2.83	0.83	0.11	1.75	0.45
7	DB101243-261	1/0 AWG 275/24 1/0 Weld		1/2	3.77	2.83	0.83	0.12	1.75	0.5
8	DB101401-260	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/4	2.77	1.64	0.75	0.12	1.00	0.45
9	DB101434	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/4	2.76	1.81	0.75	0.14	0.75	0.46
10	DB101434-250	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/4	2.64	1.45	0.76	0.12	0.75	0.46
11	DB101434-251	1/0 AWG 275/24 1/0 Weld		1/4	2.38	1.58	0.85	0.13	0.75	0.52
12	DB101434-260	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/4	2.52	1.39	0.75	0.12	0.75	0.45
13	DB101434-261	1/0 AWG 275/24 1/0 Weld		1/4	2.33	1.39	0.83	0.12	0.75	0.5
14	DB101458-250	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/4	2.52	1.33	0.76	0.12	0.63	0.46
15	DB101458-251	1/0 AWG 275/24 1/0 Weld		1/4	2.26	1.46	0.85	0.13	0.63	0.52
16	DB101458-260	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		1/4	2.40	1.27	0.75	0.12	0.63	0.45
17	DB101458-261	1/0 AWG 275/24 1/0 Weld		1/4	2.21	1.27	0.83	0.12	0.63	0.5
18	DB103801	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		3/8	2.88	1.93	0.75	0.13	1.00	0.46
19	DB103801-250	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		3/8	3.02	1.83	0.76	0.12	1.00	0.46
20	DB103801-251	1/0 AWG 275/24 1/0 Weld		3/8	2.81	1.97	0.85	0.13	1.00	0.52
21	DB103801-260	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		3/8	2.96	1.83	0.75	0.12	1.00	0.45
22	DB103801-261	1/0 AWG 275/24 1/0 Weld		3/8	2.77	1.83	0.83	0.12	1.00	0.5
23	DB103843	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		3/8	3.52	2.57	0.75	0.14	1.75	0.46
24	DB105601	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		5/16	2.73	1.78	0.75	0.14	1.00	0.46
25	DB105601-251	1/0 AWG 275/24 1/0 Weld		5/16	2.72	1.92	0.85	0.13	1.00	0.52
26	DB105601-261	1/0 AWG 275/24 1/0 Weld		5/16	2.64	1.70	0.83	0.12	1.00	0.5
27	DB105634-251	1/0 AWG 275/24 1/0 Weld		5/16	2.47	1.67	0.85	0.13	0.75	0.52
28	DB105634-261	1/0 AWG 275/24 1/0 Weld		5/16	2.39	1.45	0.83	0.12	0.75	0.5
29	DB105678	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		5/16	2.51	1.56	0.75	0.14	0.875	0.46
30	DB105678-250	1/0 AWG 100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254		5/16	2.83	1.64	0.76	0.12	0.88	0.46

1/0 AWG

Compression Connectors / Two hole 0° / 1/0 AWG

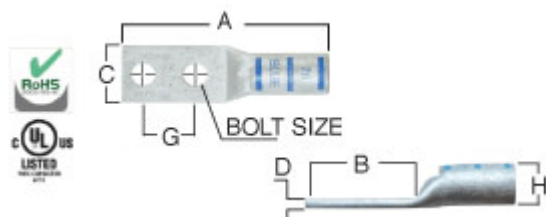


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	DB105678-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	2.71	1.58	0.75	0.12	0.88	0.45
32	LB101201-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	3.79	2.10	0.80	0.12	1.00	0.46
33	LB101201P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	3.79	2.10	0.80	0.12	1.00	0.46
34	LB101243	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	4.30	3.00	0.75	0.13	1.75	0.46
35	LB101243-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	4.70	3.01	0.80	0.12	1.75	0.46
36	LB101243-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	4.46	2.83	0.81	0.11	1.75	0.45
37	LB101243P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	4.70	3.01	0.80	0.12	1.75	0.46
38	LB101243P-251	1/0 AWG	275/24 1/0 Weld	1/2	4.76	3.01	0.85	0.13	1.75	0.52
39	LB101243P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/2	4.46	2.83	0.83	0.11	1.75	0.45
40	LB101243P-261	1/0 AWG	275/24 1/0 Weld	1/2	4.58	2.83	0.83	0.12	1.75	0.48
41	LB101401	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.18	1.88	0.75	0.13	1.00	0.46
42	LB101401P	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.18	1.88	0.75	0.13	1.00	0.46
43	LB101401P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.39	1.70	0.76	0.12	1.00	0.46
44	LB101401P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.27	1.64	0.75	0.12	1.00	0.45
45	LB101434	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	2.68	1.38	0.75	0.13	0.75	0.46
46	LB101434-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.14	1.45	0.76	0.12	0.75	0.46
47	LB101434-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.02	1.39	0.75	0.12	0.75	0.45
48	LB101434P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.14	1.45	0.76	0.12	0.75	0.46
49	LB101434P-251	1/0 AWG	275/24 1/0 Weld	1/4	3.28	1.53	0.85	0.13	0.75	0.52
50	LB101434P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.02	1.39	0.75	0.12	0.75	0.45
51	LB101434P-261	1/0 AWG	275/24 1/0 Weld	1/4	3.14	1.39	0.83	0.12	0.75	0.48
52	LB101458	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	2.49	1.19	0.75	0.13	0.63	0.46
53	LB101458-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.02	1.33	0.76	0.12	0.63	0.46
54	LB101458-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	2.90	1.265	0.75	0.12	0.63	0.45
55	LB101458P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	3.02	1.33	0.76	0.12	0.63	0.46
56	LB101458P-251	1/0 AWG	275/24 1/0 Weld	1/4	3.16	1.41	0.85	0.13	0.63	0.52
57	LB101458P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	2.90	1.27	0.75	0.12	0.63	0.45
58	LB101458P-261	1/0 AWG	275/24 1/0 Weld	1/4	3.02	1.27	0.83	0.12	0.63	0.48
59	LB103801	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	3.23	1.93	0.75	0.13	1.00	0.46
60	LB103801-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	3.52	1.83	0.76	0.12	1.00	0.46

1/0 AWG

Compression Connectors / Two hole 0° / 1/0 AWG

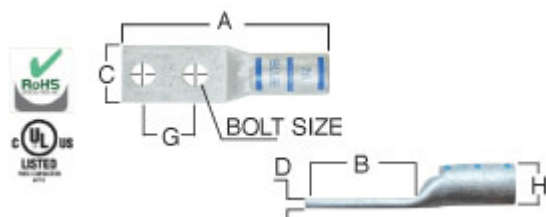

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Pink	42
Panduit	CT-720 CT-920	Pink	P42
Burndy	MY29 Y644M	Pink	12


#	Cat.No	Wire Size			Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
61	LB103801-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	3.46	1.83	0.75	0.12	1.00	0.45	
62	LB103801P	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	3.28	1.98	0.75	0.13	1.00	0.46	
63	LB103801P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	3.52	1.83	0.76	0.12	1.00	0.46	
64	LB103801P-251	1/0 AWG	275/24 1/0 Weld	3/8	3.59	1.84	0.85	0.13	1.00	0.52	
65	LB103801P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	3.46	1.83	0.75	0.12	1.00	0.45	
66	LB103801P-261	1/0 AWG	275/24 1/0 Weld	3/8	3.58	1.83	0.83	0.12	1.00	0.48	
67	LB103843-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	4.21	2.58	0.75	0.12	1.75	0.45	
68	LB103843P-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	4.27	2.58	0.76	0.12	1.75	0.46	
69	LB103843P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	4.21	2.58	0.75	0.12	1.75	0.45	
70	LB105601-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	3.45	1.76	0.76	0.12	1.00	0.46	
71	LB105601-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	3.33	1.70	0.75	0.12	1.00	0.45	
72	LB105601P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	3.33	1.70	0.75	0.12	1.00	0.45	
73	LB105678	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	2.93	1.63	0.75	0.13	0.88	0.46	
74	LB105678-250	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	3.33	1.64	0.76	0.12	0.88	0.46	
75	LB105678P-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	5/16	3.21	1.58	0.75	0.12	0.88	0.45	
76	WP101434-126	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	2.96	1.79	0.74	0.12	0.75	0.45	
77	WP101458-179	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	1/4	2.59	1.42	0.75	0.12	0.63	0.45	
78	WP103801-056	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	2.96	1.79	0.74	0.12	1.00	0.45	

2/0 AWG

Compression Connectors / Two hole 0°

2/0 AWG

Compression Connectors / Two hole 0° / 2/0 AWG

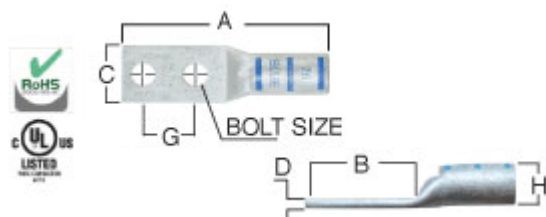


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB201201-251	2/0 AWG	325/24 2/0 Weld	1/2	3.22	2.17	0.96	0.13	1.00	0.58
2	DB201201-261	2/0 AWG	325/24 2/0 Weld	1/2	3.19	2.08	0.93	0.13	1.00	0.57
3	DB201243	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.81	2.81	0.83	0.14	1.75	0.51
4	DB201243-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.29	3.01	0.85	0.13	1.75	0.52
5	DB201243-251	2/0 AWG	325/24 2/0 Weld	1/2	4.14	2.96	0.96	0.13	1.75	0.58
6	DB201243-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.07	2.83	0.83	0.12	1.75	0.50
7	DB201243-261	2/0 AWG	325/24 2/0 Weld	1/2	3.94	2.83	0.93	0.13	1.75	0.57
8	DB201401-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.88	1.64	0.83	0.12	1.00	0.50
9	DB201434	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.44	1.44	0.83	0.14	0.75	0.51
10	DB201434-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.81	1.53	0.85	0.13	0.75	0.52
11	DB201434-251	2/0 AWG	325/24 2/0 Weld	1/4	2.66	1.76	0.96	0.13	0.75	0.58
12	DB201434-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.63	1.39	0.83	0.12	0.75	0.50
13	DB201434-261	2/0 AWG	325/24 2/0 Weld	1/4	2.50	1.39	0.93	0.13	0.75	0.57
14	DB201458-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.69	1.41	0.85	0.13	0.63	0.52
15	DB201458-251	2/0 AWG	325/24 2/0 Weld	1/4	2.54	1.64	0.96	0.13	0.63	0.58
16	DB201458-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.51	1.27	0.83	0.12	0.63	0.50
17	DB201458-261	2/0 AWG	325/24 2/0 Weld	1/4	2.38	1.27	0.93	0.13	0.63	0.57
18	DB203801	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	2.93	1.93	0.83	0.13	1.00	0.51
19	DB203801-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.12	1.84	0.85	0.13	1.00	0.52
20	DB203801-251	2/0 AWG	325/24 2/0 Weld	3/8	2.97	2.03	0.96	0.13	1.00	0.58
21	DB203801-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.07	1.83	0.83	0.12	1.00	0.50
22	DB203801-261	2/0 AWG	325/24 2/0 Weld	3/8	2.94	1.83	0.93	0.13	1.00	0.57
23	DB205601	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.81	1.81	0.83	0.14	1.00	0.51
24	DB205601-251	2/0 AWG	325/24 2/0 Weld	5/16	2.91	2.01	0.96	0.13	1.00	0.58
25	DB205601-261	2/0 AWG	325/24 2/0 Weld	5/16	2.81	1.70	0.93	0.13	1.00	0.57
26	DB205678	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.63	1.63	0.83	0.14	0.875	0.51
27	DB205678-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.94	1.66	0.85	0.13	0.88	0.52
28	DB205678-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.82	1.58	0.83	0.12	0.875	0.50
29	LB201201-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.89	2.09	0.85	0.13	1.00	0.52
30	LB201201P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.89	2.09	0.85	0.13	1.00	0.52

2/0 AWG

Compression Connectors / Two hole 0° / 2/0 AWG

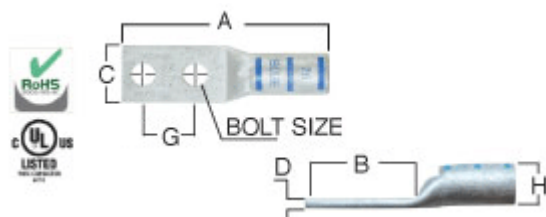


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB201243	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.16	2.81	0.83	0.13	1.75	0.51
32	LB201243-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.81	3.01	0.85	0.13	1.75	0.52
33	LB201243-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.63	2.83	0.83	0.12	1.75	0.50
34	LB201243P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.81	3.01	0.85	0.13	1.75	0.52
35	LB201243P-251	2/0 AWG	325/24 2/0 Weld	1/2	4.81	3.01	0.96	0.13	1.75	0.58
36	LB201243P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	4.63	2.83	0.83	0.12	1.75	0.50
37	LB201243P-261	2/0 AWG	325/24 2/0 Weld	1/2	4.63	2.83	0.93	0.13	1.75	0.57
38	LB201434	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.66	1.31	0.81	0.13	0.75	0.51
39	LB201434-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.33	1.53	0.85	0.13	0.75	0.52
40	LB201434-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.19	1.39	0.83	0.12	0.75	0.50
41	LB201434P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.33	1.53	0.85	0.13	0.75	0.52
42	LB201434P-251	2/0 AWG	325/24 2/0 Weld	1/4	3.33	1.53	0.96	0.13	0.75	0.58
43	LB201434P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.19	1.39	0.83	0.12	0.75	0.50
44	LB201434P-261	2/0 AWG	325/24 2/0 Weld	1/4	3.19	1.39	0.93	0.13	0.75	0.57
45	LB201458	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.60	1.25	0.83	0.13	0.63	0.51
46	LB201458-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.21	1.41	0.85	0.13	0.63	0.52
47	LB201458-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.07	1.27	0.83	0.12	0.63	0.50
48	LB201458P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.21	1.41	0.85	0.13	0.63	0.52
49	LB201458P-251	2/0 AWG	325/24 2/0 Weld	1/4	3.21	1.41	0.96	0.13	0.63	0.58
50	LB201458P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	3.07	1.27	0.83	0.12	0.63	0.50
51	LB201458P-261	2/0 AWG	325/24 2/0 Weld	1/4	3.07	1.27	0.93	0.13	0.63	0.57
52	LB203801	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.16	1.81	0.83	0.13	1.00	0.51
53	LB203801-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.64	1.84	0.85	0.13	1.00	0.52
54	LB203801-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.63	1.83	0.83	0.12	1.00	0.50
55	LB203801P	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.16	1.81	0.83	0.13	1.00	0.51
56	LB203801P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.64	1.84	0.85	0.13	1.00	0.52
57	LB203801P-251	2/0 AWG	325/24 2/0 Weld	3/8	3.64	1.84	0.96	0.13	1.00	0.58
58	LB203801P-260	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.63	1.83	0.83	0.12	1.00	0.50
59	LB203801P-261	2/0 AWG	325/24 2/0 Weld	3/8	3.63	1.83	0.93	0.13	1.00	0.57
60	LB205601-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	3.58	1.78	0.85	0.13	1.00	0.52

2/0 AWG

Compression Connectors / Two hole 0° / 2/0 AWG

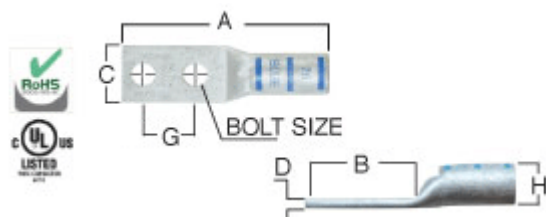

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Black	45
Panduit	CT-720 CT-920	Black	P45
Burndy	MY29 Y644M	Black	13


#	Cat.No	Wire Size		Dimension (in.)							
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
61	LB205601P-250	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	3.58	1.78	0.85	0.13	1.00	0.52	
62	WP201201-142	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.07	1.81	0.83	0.12	1.00	0.50	
63	WP201243-143	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/2	3.82	2.56	0.83	0.12	1.75	0.50	
64	WP201434-130	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.77	1.56	0.83	0.12	0.75	0.50	
65	WP201458-180	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	1/4	2.65	1.44	0.83	0.12	0.63	0.50	
66	WP203801-057	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	3/8	3.02	1.81	0.83	0.12	1.00	0.50	
67	WP205601-013	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	3.02	1.81	0.83	0.12	1.00	0.50	
68	WP205678-173	2/0 AWG	125 Navy 1/0 Weld 275/24 = 111 kcmil 133/.0282	5/16	2.93	1.63	0.83	0.12	0.88	0.50	

3/0 AWG

Compression Connectors / Two hole 0°

3/0 AWG

Compression Connectors / Two hole 0° / 3/0 AWG

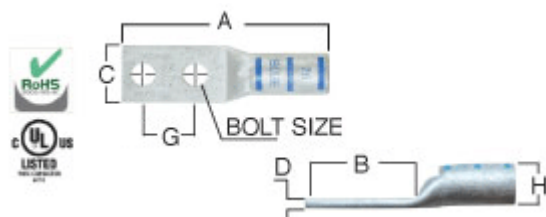


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB301243	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	3.83	2.81	0.94	0.14	1.75	0.57
2	DB301243-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.47	3.01	0.96	0.13	1.75	0.58
3	DB301243-251	3/0 AWG 450/24 3/0 Weld		1/2	4.24	3.02	1.06	0.14	1.75	0.64
4	DB301243-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.15	2.83	0.91	0.13	1.75	0.56
5	DB301243-261	3/0 AWG 450/24 3/0 Weld		1/2	4.15	2.83	1.03	0.14	1.75	0.63
6	DB301434-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/4	2.99	1.53	0.96	0.13	0.75	0.58
7	DB301434-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/4	2.71	1.39	0.91	0.12	0.75	0.56
8	DB301458-251	3/0 AWG 450/24 3/0 Weld		1/4	2.64	1.70	1.06	0.14	0.63	0.64
9	DB301458-261	3/0 AWG 450/24 3/0 Weld		1/4	2.59	1.27	1.03	0.14	0.63	0.63
10	DB303801	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	3/8	2.83	1.81	0.94	0.14	1.00	0.57
11	DB303801-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	3/8	3.30	1.84	0.96	0.13	1.00	0.58
12	DB303801-251	3/0 AWG 450/24 3/0 Weld		3/8	3.09	2.11	1.06	0.14	1.00	0.64
13	DB303801-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	3/8	3.15	1.83	0.91	0.12	1.00	0.56
14	DB303801-261	3/0 AWG 450/24 3/0 Weld		3/8	3.15	1.83	1.03	0.14	1.00	0.63
15	DB305601	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	5/16	2.77	1.75	0.94	0.14	1.00	0.57
16	DB305601-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	5/16	3.24	1.78	0.96	0.13	1.00	0.58
17	DB305601-251	3/0 AWG 450/24 3/0 Weld		5/16	3.02	2.08	1.06	0.14	1.00	0.64
18	DB305601-261	3/0 AWG 450/24 3/0 Weld		5/16	3.02	1.70	1.03	0.14	1.00	0.63
19	LB301201-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	3.90	2.09	0.96	0.13	1.00	0.58
20	LB301201P-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	3.90	2.09	0.96	0.13	1.00	0.58
21	LB301243	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.47	3.00	0.94	0.13	1.75	0.57
22	LB301243-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.82	3.01	0.96	0.13	1.75	0.58
23	LB301243-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.65	2.83	0.91	0.13	1.75	0.56
24	LB301243P-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.82	3.01	0.96	0.13	1.75	0.58
25	LB301243P-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/2	4.65	2.83	0.91	0.13	1.75	0.56
26	LB301434	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/4	2.92	1.45	0.92	0.13	0.75	0.57
27	LB301434-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/4	3.34	1.53	0.96	0.13	0.75	0.58
28	LB301434-260	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/4	3.21	1.39	0.91	0.12	0.75	0.56
29	LB301434P-250	3/0 AWG 150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316 259/.0227 427/.0177	1/4	3.34	1.53	0.96	0.13	0.75	0.58
30	LB301434P-251	3/0 AWG 450/24 3/0 Weld		1/4	3.41	1.53	1.06	0.14	0.75	0.64

3/0 AWG

Compression Connectors / Two hole 0° / 3/0 AWG

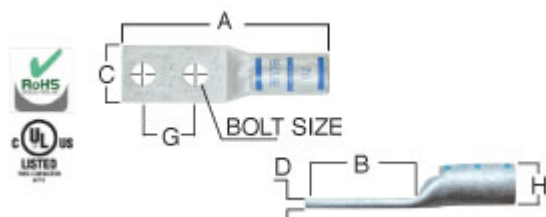

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Orange	50
Panduit	CT-720 CT-920	Orange	P50
Burndy	MY29 Y644M	Orange	14


#	Cat.No	Wire Size					Dimension (in.)						
		Code	Flex Class G,H,I,K,M				Bolt Size	A	B	C	D	G	H
31	LB301434P-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	1/4	3.21	1.39	0.90	0.12	0.75	0.56
32	LB301434P-261	3/0 AWG	450/24 3/0 Weld				1/4	3.21	1.39	1.03	0.14	0.75	0.63
33	LB303801	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	3.10	1.63	0.92	0.13	1.00	0.57
34	LB303801-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	3.65	1.84	0.96	0.13	1.00	0.58
35	LB303801-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	3.65	1.83	0.90	0.12	1.00	0.56
36	LB303801P-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	3.65	1.84	0.96	0.13	1.00	0.58
37	LB303801P-251	3/0 AWG	450/24 3/0 Weld				3/8	3.74	1.86	1.06	0.14	1.00	0.64
38	LB303801P-260	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	3.65	1.83	0.9	0.12	1.00	0.56
39	LB303801P-261	3/0 AWG	450/24 3/0 Weld				3/8	3.65	1.83	1.03	0.14	1.00	0.63
40	LB305601P-250	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	5/16	3.59	1.78	0.96	0.13	1.00	0.58
41	WP301201-149	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	1/2	2.94	1.81	0.93	0.12	1.00	0.56
42	WP301243-150	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	1/2	3.69	2.56	0.93	0.12	1.75	0.56
43	WP301458-181	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	1/4	2.57	1.44	0.94	0.12	0.63	0.56
44	WP303801-077	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	3/8	2.94	1.81	0.93	0.12	1.00	0.56
45	WP305601-020	3/0 AWG	150 Navy 2/0 Weld 325/24 = 131 kcmil	133/.0316	259/.0227	427/.0177	5/16	2.94	1.81	0.93	0.12	1.00	0.56

4/0 AWG

Compression Connectors / Two hole 0°

4/0 AWG

Compression Connectors / Two hole 0° / 4/0 AWG

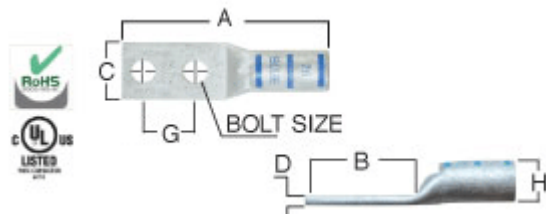


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB401201-251	4/0 AWG	550/24 4/0 Weld	1/2	3.44	2.32	1.19	0.16	1.00	0.73
2	DB401201-261	4/0 AWG	550/24 4/0 Weld	1/2	3.43	2.08	1.14	0.15	1.00	0.71
3	DB401241-251	4/0 AWG	550/24 4/0 Weld	1/2	3.72	2.60	1.19	0.16	1.25	0.73
4	DB401241-261	4/0 AWG	550/24 4/0 Weld	1/2	3.68	2.33	1.14	0.15	1.25	0.71
5	DB401243	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.27	3.00	1.03	0.14	1.75	0.63
6	DB401243-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.52	3.01	1.06	0.14	1.75	0.64
7	DB401243-251	4/0 AWG	550/24 4/0 Weld	1/2	4.36	3.11	1.19	0.16	1.75	0.73
8	DB401243-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.03	2.83	1.02	0.14	1.75	0.63
9	DB401243-261	4/0 AWG	550/24 4/0 Weld	1/2	4.18	2.83	1.20	0.15	1.75	0.71
10	DB401243-263	4/0 AWG	550/24 4/0 Weld	1/2	4.18	2.83	1.14	0.15	1.75	0.71
11	DB401401-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	2.84	1.64	1.02	0.14	1.00	0.63
12	DB401434	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.08	1.81	1.03	0.14	0.75	0.63
13	DB401434-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.04	1.53	1.06	0.14	0.75	0.64
14	DB401434-251	4/0 AWG	550/24 4/0 Weld	1/4	2.76	1.79	1.19	0.16	0.75	0.73
15	DB401434-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	2.59	1.39	1.02	0.14	0.75	0.63
16	DB401434-261	4/0 AWG	550/24 4/0 Weld	1/4	2.74	1.39	1.12	0.15	0.75	0.71
17	DB401458	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	2.71	1.44	1.03	0.16	0.625	0.63
18	DB401458-251	4/0 AWG	550/24 4/0 Weld	1/4	2.57	1.70	1.19	0.16	0.63	0.73
19	DB401458-261	4/0 AWG	550/24 4/0 Weld	1/4	2.62	1.27	1.12	0.15	0.625	0.71
20	DB403801	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.20	1.93	1.03	0.14	1.00	0.63
21	DB403801-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.37	1.86	1.06	0.14	1.00	0.64
22	DB403801-251	4/0 AWG	550/24 4/0 Weld	3/8	3.17	2.17	1.19	0.16	1.00	0.73
23	DB403801-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.03	1.83	1.02	0.14	1.00	0.63
24	DB403801-261	4/0 AWG	550/24 4/0 Weld	3/8	3.18	1.83	1.12	0.15	1.00	0.71
25	DB403834-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.78	1.58	1.02	0.14	0.75	0.63
26	DB405601	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	3.20	1.93	1.03	0.14	1.00	0.63
27	DB405601-251	4/0 AWG	550/24 4/0 Weld	5/16	3.14	2.17	1.19	0.16	1.00	0.73
28	DB405601-261	4/0 AWG	550/24 4/0 Weld	5/16	3.05	1.70	1.12	0.15	1.00	0.71
29	DB405643-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	3.65	2.45	1.02	0.14	1.75	0.63
30	LB401201-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.96	2.09	1.06	0.14	1.00	0.64

4/0 AWG

Compression Connectors / Two hole 0° / 4/0 AWG

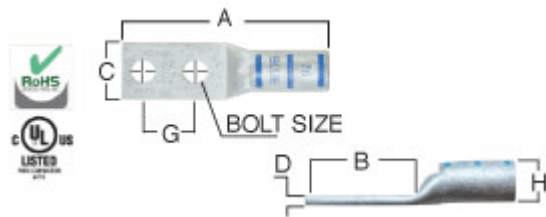


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15

#	Cat.No	Wire Size		Dimension (in.)							
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
31	LB401201P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	3.96	2.09	1.06	0.14	1.00	0.64	
32	LB401243	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.72	3.00	1.03	0.14	1.75	0.63	
33	LB401243-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.88	3.01	1.06	0.14	1.75	0.64	
34	LB401243-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.77	2.83	1.02	0.14	1.75	0.63	
35	LB401243P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.88	3.01	1.06	0.14	1.75	0.64	
36	LB401243P-251	4/0 AWG	550/24 4/0 Weld	1/2	5.57	3.01	1.19	0.16	1.75	0.73	
37	LB401243P-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/2	4.77	2.83	1.02	0.14	1.75	0.63	
38	LB401243P-261	4/0 AWG	550/24 4/0 Weld	1/2	4.77	2.83	1.14	0.15	1.75	0.71	
39	LB401434	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.10	1.38	1.03	0.14	0.75	0.63	
40	LB401434-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.40	1.53	1.06	0.14	0.75	0.64	
41	LB401434-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.33	1.39	1.02	0.14	0.75	0.63	
42	LB401434P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.40	1.53	1.06	0.14	0.75	0.64	
43	LB401434P-251	4/0 AWG	550/24 4/0 Weld	1/4	3.97	1.41	1.19	0.16	0.75	0.73	
44	LB401434P-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.33	1.39	1.02	0.14	0.75	0.63	
45	LB401434P-261	4/0 AWG	550/24 4/0 Weld	1/4	3.33	1.39	1.14	0.15	0.75	0.71	
46	LB401458P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	3.28	1.41	1.06	0.14	0.63	0.64	
47	LB403801	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.53	1.81	1.03	0.14	1.00	0.63	
48	LB403801-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.73	1.86	1.06	0.14	1.00	0.64	
49	LB403801-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.77	1.83	1.02	0.14	1.00	0.63	
50	LB403801P	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.60	1.88	1.03	0.14	1.00	0.63	
51	LB403801P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.73	1.86	1.06	0.14	1.00	0.64	
52	LB403801P-251	4/0 AWG	550/24 4/0 Weld	3/8	4.38	1.82	1.19	0.16	1.00	0.73	
53	LB403801P-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	3.77	1.83	1.02	0.14	1.00	0.63	
54	LB403801P-261	4/0 AWG	550/24 4/0 Weld	3/8	3.77	1.83	1.14	0.15	1.00	0.71	
55	LB403843	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	4.35	2.63	1.03	0.14	1.75	0.63	
56	LB403843-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	4.48	2.61	1.06	0.14	1.75	0.64	
57	LB403843-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	4.52	2.58	1.02	0.14	1.75	0.63	
58	LB403843P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	4.48	2.61	1.06	0.14	1.75	0.64	
59	LB403843P-260	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	4.52	2.58	1.02	0.14	1.75	0.63	
60	LB405601-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	3.66	1.79	1.06	0.14	1.00	0.64	

4/0 AWG

Compression Connectors / Two hole 0° / 4/0 AWG

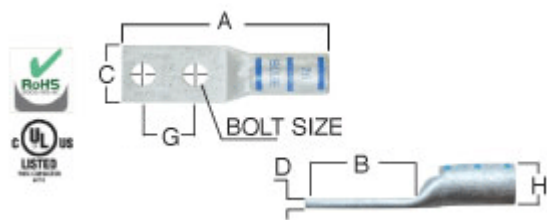

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Purple	54
Panduit	CT-720 CT-920	Purple	P54
Burndy	MY29 Y644M	Purple	15


#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
61	LB405601P-250	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	5/16	3.66	1.79	1.06	0.14	1.00	0.64
62	LB405643P-261	-	550/24 4/0 Weld	5/16	4.39	2.45	1.20	0.16	1.75	0.71
63	WP401434-153	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	1/4	2.72	1.52	1.00	0.14	0.75	0.63
64	WP403801-059	4/0 AWG	200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154	3/8	2.97	1.77	1.00	0.14	1.00	0.63

250 kcmil

Compression Connectors / Two hole 0°

250 kcmil

Compression Connectors / Two hole 0° / 250 kcmil

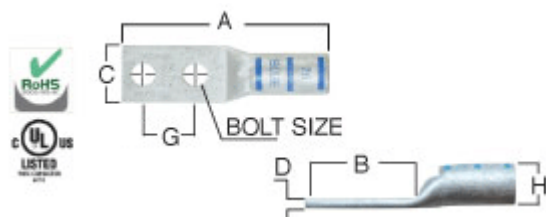


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)							
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H	
1	DB251241-251	250 kcmil	262.6 kcmil		1/2	3.75	2.66	1.28	0.17	1.25	0.79
2	DB251241-261	250 kcmil	Class G 259 Str Class H 427 Str		1/2	3.74	2.33	1.20	0.16	1.25	0.73
3	DB251241-263	-	250 kcmil 637/24 Class I, K, M		1/2	3.74	2.33	1.29	0.18	1.25	0.79
4	DB251243	250 kcmil	250 Navy		1/2	4.21	2.81	1.13	0.18	1.75	0.70
5	DB251243-241	-	4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306		1/2	4.21	2.81	0.94	0.14	1.75	0.75
6	DB251243-250	250 kcmil	250 Navy		1/2	4.61	3.01	1.17	0.14	1.75	0.70
7	DB251243-251	250 kcmil	262.6 kcmil		1/2	4.39	3.17	1.28	0.17	1.75	0.79
8	DB251243-260	250 kcmil	250 Navy		1/2	4.24	2.83	1.11	0.16	1.75	0.68
9	DB251243-261	250 kcmil	Class G 259 Str Class H 427 Str		1/2	4.24	2.83	1.20	0.16	1.75	0.73
10	DB251243-263	-	250 kcmil 637/24 Class I, K, M		1/2	4.24	2.83	1.29	0.18	1.75	0.79
11	DB253801	250 kcmil	250 Navy		3/8	3.33	1.93	1.13	0.14	1.00	0.70
12	DB253801-241	-	4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306		3/8	4.20	2.80	1.25	0.15	1.00	0.75
13	DB253801-250	250 kcmil	250 Navy		3/8	3.46	1.86	1.17	0.14	1.00	0.70
14	DB253801-251	250 kcmil	262.6 kcmil		3/8	3.20	2.23	1.28	0.17	1.00	0.79
15	DB253801-260	250 kcmil	250 Navy		3/8	3.24	1.83	1.11	0.16	1.00	0.68
16	DB253801-261	250 kcmil	Class G 259 Str Class H 427 Str		3/8	3.24	1.83	1.20	0.16	1.00	0.73
17	DB253801-263	-	250 kcmil 637/24 Class I, K, M		3/8	3.24	1.83	1.29	0.18	1.00	0.79
18	DB253843-251	250 kcmil	262.6 kcmil		3/8	3.95	2.98	1.28	0.17	1.75	0.79
19	DB253843-261	-	250 kcmil 637/24 Class I, K, M		3/8	3.99	2.58	1.29	0.18	1.75	0.79
20	DB253878-241	-	4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306		3/8	3.09	1.69	1.25	0.15	0.875	0.75
21	DB253878-243	-	4/0 Weld 925/24 = 373 kcmil 259/.0393 427/.0306		3/8	3.28	1.88	1.25	0.16	0.88	0.75
22	LB251201-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.05	2.09	1.17	0.14	1.00	0.70
23	LB251201P-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.05	2.09	1.17	0.14	1.00	0.70
24	LB251243	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.95	3.00	1.13	0.14	1.75	0.70
25	LB251243-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.97	3.01	1.17	0.14	1.75	0.70
26	LB251243-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.80	2.83	1.11	0.16	1.75	0.68
27	LB251243P-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.97	3.01	1.17	0.14	1.75	0.70
28	LB251243P-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld		1/2	4.80	2.83	1.10	0.16	1.75	0.68
29	LB251434P-251	250 kcmil	262.6 kcmil		1/4	3.93	1.34	1.28	0.17	0.75	0.79
30	LB251434P-261	-	250 kcmil 637/24 Class I, K, M		1/40	3.74	1.39	1.29	0.18	0.75	0.76

250 kcmil

Compression Connectors / Two hole 0° / 250 kcmil

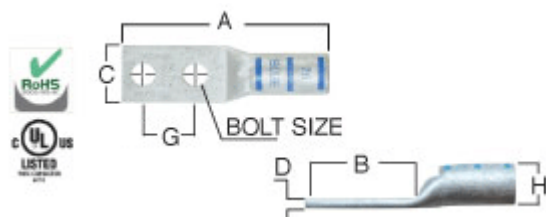

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM8	Yellow	62
Panduit	CT-720 CT-920	Yellow	P62
Burndy	MY29 Y644M	Yellow	16


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB253801	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	3.88	1.93	1.13	0.14	1.00	0.70
32	LB253801-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	3.82	1.86	1.17	0.14	1.00	0.70
33	LB253801-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	3.80	1.83	1.10	0.16	1.00	0.68
34	LB253801P	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	3.88	1.93	1.13	0.14	1.00	0.70
35	LB253801P-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	3.82	1.86	1.17	0.14	1.00	0.70
36	LB253801P-251	250 kcmil	262.6 kcmil	3/8	4.41	1.82	1.28	0.17	1.00	0.79
37	LB253801P-260	250 kcmil	550/24 = 222 kcmil 4/0 Weld	3/8	3.80	1.83	1.10	0.14	1.00	0.68
38	LB253801P-261	250 kcmil	Class G 259 Str Class H 427 Str	3/8	4.18	1.83	1.20	0.16	1.00	0.73
39	LB253801P-263	-	250 kcmil 637/24 Class I, K, M	3/8	4.18	1.83	1.28	0.18	1.00	0.79
40	LB255601P-250	250 kcmil	550/24 = 222 kcmil 4/0 Weld	5/16	3.75	1.79	1.17	0.14	1.00	0.70
41	WP251201-159	250 kcmil	250 Navy	1/2	3.44	2.06	1.20	0.16	1.00	0.72
42	WP251243-160	250 kcmil	250 Navy	1/2	3.94	2.56	1.20	0.16	1.75	0.72
43	WP253801-027	250 kcmil	250 Navy	3/8	3.19	1.81	1.20	0.16	1.00	0.72
44	WP255601-158	250 kcmil	250 Navy	5/16	3.19	1.81	1.20	0.16	1.00	0.72

300 kcmil

Compression Connectors / Two hole 0°

300 kcmil

Compression Connectors / Two hole 0° / 300 kcmil

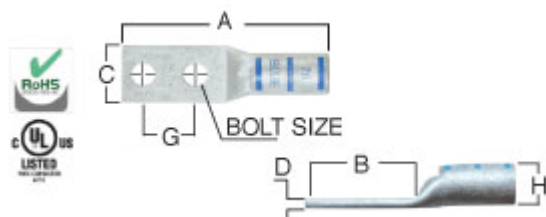

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	CT-720 CT-920	White	P66
Burndy	Y35 Y45	White	17


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB311243	300 kcmil	300 Navy	1/2	4.45	3.00	1.25	0.15	1.75	0.78
2	DB311243-250	300 kcmil	300 Navy	1/2	4.85	3.01	1.19	0.16	1.75	0.72
3	DB311243-251	-	313.1 kcmil 775/24 300 kcmil	1/2	4.60	3.24	1.39	0.18	1.75	0.86
4	DB311243-260	300 kcmil	300 Navy	1/2	4.26	2.83	1.20	0.16	1.75	0.73
5	DB311243-261	-	313.1 kcmil 775/24 300 kcmil	1/2	4.52	2.83	1.38	0.19	1.75	0.86
6	DB313801	300 kcmil	300 Navy	3/8	3.38	1.93	1.25	0.15	1.00	0.78
7	DB313801-250	300 kcmil	300 Navy	3/8	3.66	1.82	1.19	0.16	1.00	0.72
8	DB313801-251	-	313.1 kcmil 775/24 300 kcmil	3/8	3.41	2.30	1.39	0.18	1.00	0.86
9	DB313801-260	300 kcmil	300 Navy	3/8	3.26	1.83	1.20	0.16	1.00	0.73
10	DB313801-261	-	313.1 kcmil 775/24 300 kcmil	3/8	3.52	1.83	1.38	0.19	1.00	0.86
11	LB311243	300 kcmil	300 Navy	1/2	5.20	3.00	1.25	0.15	1.75	0.78
12	LB311243-250	300 kcmil	300 Navy	1/2	5.64	3.01	1.19	0.16	1.75	0.72
13	LB311243-260	300 kcmil	300 Navy	1/2	5.23	2.83	1.20	0.16	1.75	0.73
14	LB311243P-250	300 kcmil	300 Navy	1/2	5.65	3.01	1.19	0.16	1.75	0.72
15	LB311243P-260	300 kcmil	300 Navy	1/2	5.23	2.83	1.20	0.16	1.75	0.73
16	LB313801	300 kcmil	300 Navy	3/8	5.00	2.80	1.25	0.15	1.00	0.78
17	LB313801-250	300 kcmil	300 Navy	3/8	4.45	1.82	1.19	0.16	1.00	0.72
18	LB313801-260	300 kcmil	300 Navy	3/8	4.23	1.83	1.20	0.16	1.00	0.73
19	LB313801P-250	300 kcmil	300 Navy	3/8	4.46	1.82	1.19	0.16	1.00	0.72
20	LB313801P-251	-	313.1 kcmil 775/24 300 kcmil	3/8	4.52	1.82	1.39	0.18	1.00	0.86
21	LB313801P-260	300 kcmil	300 Navy	3/8	4.23	1.83	1.20	0.16	1.00	0.73
22	LB313801P-261	-	313.1 kcmil 775/24 300 kcmil	3/8	4.35	1.83	1.55	0.19	1.00	0.86

350 kcmil

Compression Connectors / Two hole 0°

350 kcmil

Compression Connectors / Two hole 0° / 350 kcmil

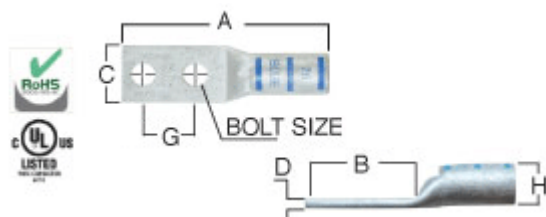


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB351241-250	350 kcmil	350 Navy	1/2	4.31	2.37	1.28	0.17	1.25	0.79
2	DB351241-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	4.16	2.82	1.54	0.22	1.25	0.95
3	DB351241-260	350 kcmil	350 Navy	1/2	3.89	2.33	1.29	0.18	1.25	0.79
4	DB351241-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	4.20	2.33	1.52	0.23	1.25	0.95
5	DB351243	350 kcmil	350 Navy	1/2	4.55	3	1.36	0.18	1.75	0.84
6	DB351243-250	350 kcmil	350 Navy	1/2	4.95	3.01	1.28	0.17	1.75	0.79
7	DB351243-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	4.80	3.33	1.54	0.22	1.75	0.95
8	DB351243-260	350 kcmil	350 Navy	1/2	4.39	2.83	1.29	0.18	1.75	0.79
9	DB351243-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	4.70	2.83	1.52	0.23	1.75	0.95
10	DB351434	350 kcmil	350 Navy	1/4	3.36	1.81	1.36	0.18	0.75	0.84
11	DB351434-250	350 kcmil	350 Navy	1/4	3.28	1.34	1.28	0.17	0.75	0.79
12	DB351434-260	350 kcmil	350 Navy	1/4	2.95	1.39	1.29	0.18	0.75	0.79
13	DB353801	350 kcmil	350 Navy	3/8	3.48	1.93	1.36	0.18	1.00	0.84
14	DB353801-250	350 kcmil	350 Navy	3/8	3.76	1.82	1.28	0.17	1.00	0.79
15	DB353801-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	3.61	2.39	1.54	0.22	1.00	0.95
16	DB353801-260	350 kcmil	350 Navy	3/8	3.39	1.83	1.29	0.18	1.00	0.79
17	DB353801-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	3.70	1.83	1.52	0.23	1.00	0.95
18	DB353843-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	4.36	3.14	1.54	0.22	1.75	0.95
19	DB353843-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	4.45	2.58	1.55	0.23	1.75	0.95
20	DB355601-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	5/16	3.54	2.35	1.54	0.22	1.00	0.95
21	DB355601-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	5/16	3.57	1.70	1.55	0.23	1.00	0.95
22	DB355643	350 kcmil	350 Navy	5/16	4.18	2.63	1.36	0.18	1.75	0.84
23	DB355643-260	350 kcmil	350 Navy	5/16	4.01	2.45	1.29	0.18	1.75	0.79
24	LB351243	350 kcmil	350 Navy	1/2	5.35	3.00	1.36	0.18	1.75	0.84
25	LB351243-250	350 kcmil	350 Navy	1/2	5.74	3.01	1.28	0.17	1.75	0.79
26	LB351243-260	350 kcmil	350 Navy	1/2	5.33	2.83	1.29	0.18	1.75	0.79
27	LB351243P-250	350 kcmil	350 Navy	1/2	5.75	3.01	1.28	0.17	1.75	0.79
28	LB351243P-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	6.01	3.01	1.54	0.22	1.75	0.95
29	LB351243P-260	350 kcmil	350 Navy	1/2	5.33	2.83	1.29	0.18	1.75	0.79
30	LB351243P-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	5.58	2.83	1.55	0.23	1.75	0.95

350 kcmil

Compression Connectors / Two hole 0° / 350 kcmil

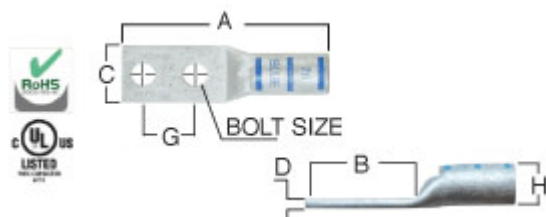

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB351434	350 kcmil	350 Navy	1/4	4.28	1.93	1.36	0.18	0.75	0.84
32	LB351434-250	350 kcmil	350 Navy	1/4	4.07	1.34	1.28	0.17	0.75	0.79
33	LB351434-260	350 kcmil	350 Navy	1/4	3.89	1.39	1.29	0.18	0.75	0.79
34	LB351434P-250	350 kcmil	350 Navy	1/4	4.08	1.34	1.28	0.17	0.75	0.79
35	LB351434P-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/4	4.34	1.34	1.54	0.22	0.75	0.95
36	LB351434P-260	350 kcmil	350 Navy	1/4	3.89	1.39	1.29	0.18	0.75	0.79
37	LB351434P-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/4	4.14	1.39	1.55	0.23	0.75	0.95
38	LB353801	350 kcmil	350 Navy	3/8	4.28	1.93	1.36	0.18	1.00	0.84
39	LB353801-250	350 kcmil	350 Navy	3/8	4.55	1.82	1.28	0.17	1.00	0.79
40	LB353801-260	350 kcmil	350 Navy	3/8	4.33	1.83	1.29	0.18	1.00	0.79
41	LB353801P	350 kcmil	350 Navy	3/8	4.28	1.93	1.36	0.18	1.00	0.84
42	LB353801P-250	350 kcmil	350 Navy	3/8	4.56	1.82	1.28	0.17	1.00	0.79
43	LB353801P-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	4.82	1.82	1.54	0.22	1.00	0.95
44	LB353801P-260	350 kcmil	350 Navy	3/8	4.33	1.83	1.29	0.18	1.00	0.79
45	LB353801P-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	4.58	1.83	1.55	0.23	1.00	0.95
46	WP351243-081	350 kcmil	350 Navy	1/2	4.08	2.30	1.29	0.18	1.25	0.80
47	WP351434-133	350 kcmil	350 Navy	1/4	3.52	1.79	1.29	0.18	0.75	0.80
48	WP353801-061	350 kcmil	350 Navy	3/8	3.52	1.79	1.29	0.18	1.00	0.80
49	WP353801-186	350 kcmil	350 Navy	3/8	3.52	1.82	1.29	0.18	1.00	0.80

400 kcmil

Compression Connectors / Two hole 0°

400 kcmil

Compression Connectors / Two hole 0° / 400 kcmil

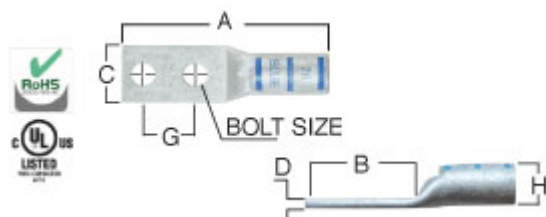

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-720 CT-920	Blue	P76
Burndy	Y35 Y45	Blue	19


#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB411243-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	5.00	3.00	1.61	0.22	1.75	0.93
2	DB411243-250	400 kcmil	400 Navy	1/2	5.11	3.01	1.39	0.18	1.75	0.86
3	DB411243-260	400 kcmil	400 Navy	1/2	4.62	2.83	1.38	0.19	1.75	0.86
4	DB413801	400 kcmil	400 Navy	3/8	3.88	1.93	1.41	0.17	1.00	0.88
5	DB413801-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	4.25	2.25	1.61	0.22	1.00	0.93
6	DB413801-243	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	4.06	2.06	1.61	0.22	1.00	0.93
7	DB413801-250	400 kcmil	400 Navy	3/8	3.92	1.82	1.39	0.18	1.00	0.86
8	DB413801-260	400 kcmil	400 Navy	3/8	3.62	1.83	1.40	0.19	1.00	0.86
9	DB413801-262	400 kcmil	400 Navy	3/8	3.62	1.83	1.38	0.19	1.00	0.86
10	DB413861	400 kcmil	400 Navy	3/8	3.88	1.93	1.41	0.17	1.06	0.88
11	DB413861-260	400 kcmil	400 Navy	3/8	3.68	1.8925	1.40	0.19	1.06	0.86
12	LB411243	400 kcmil	400 Navy	1/2	5.45	3.00	1.41	0.17	1.75	0.88
13	LB411243-250	400 kcmil	400 Navy	1/2	5.90	3.01	1.39	0.18	1.75	0.86
14	LB411243-260	400 kcmil	400 Navy	1/2	5.55	2.83	1.38	0.19	1.75	0.86
15	LB411243P-250	400 kcmil	400 Navy	1/2	5.91	3.01	1.28	0.17	1.75	0.86
16	LB411243P-260	400 kcmil	400 Navy	1/2	5.55	2.83	1.40	0.19	1.75	0.86
17	LB411434	400 kcmil	400 Navy	1/4	4.38	1.93	1.41	0.17	0.75	0.88
18	LB411434-250	400 kcmil	400 Navy	1/4	4.23	1.34	1.39	0.18	0.75	0.86
19	LB411434P-250	400 kcmil	400 Navy	1/4	4.24	1.34	1.39	0.18	0.75	0.86
20	LB413801	400 kcmil	400 Navy	3/8	4.38	1.93	1.41	0.17	1.00	0.88
21	LB413801-250	400 kcmil	400 Navy	3/8	4.71	1.82	1.39	0.18	1.00	0.86
22	LB413801-260	400 kcmil	400 Navy	3/8	4.55	1.83	1.38	0.19	1.00	0.86
23	LB413801P-250	400 kcmil	400 Navy	3/8	4.72	1.82	1.39	0.18	1.00	0.86
24	LB413801P-260	400 kcmil	400 Navy	3/8	4.55	1.83	1.40	0.19	1.00	0.86
25	WP411241-163	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	4.17	2.06	1.55	0.23	1.25	0.94
26	WP411243-034	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	4.96	2.87	1.55	0.23	1.75	0.94
27	WP413801-086	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	3.89	1.81	1.55	0.23	1.00	0.94
28	WP413801-183	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	3.89	1.82	1.55	0.23	1.00	0.94

450 kcmil

Compression Connectors / Two hole 0°

450 kcmil

Compression Connectors / Two hole 0° / 450 kcmil

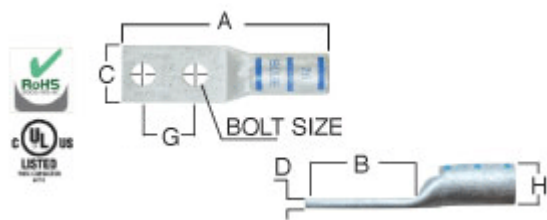

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Brown	-
Panduit	CT-920 CT-930	Brown	P87
Burndy	Y35 Y45	Brown	20


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB451243-251	450 kcmil	444.4 kcmil 450 kcmil 1100/24	1/2	5.01	3.01	1.70	0.26	1.75	1.06
2	DB451243-261	450 kcmil	444.4 kcmil 450 kcmil 1100/24	1/2	4.81	2.83	1.72	0.27	1.75	1.06
3	DB453801-251	450 kcmil	444.4 kcmil 450 kcmil 1100/24	3/8	3.82	2.50	1.70	0.26	1.00	1.06
4	DB453801-261	450 kcmil	444.4 kcmil 450 kcmil 1100/24	3/8	3.81	1.83	1.72	0.27	1.00	1.06

500 kcmil

Compression Connectors / Two hole 0°

500 kcmil

Compression Connectors / Two hole 0° / 500 kcmil

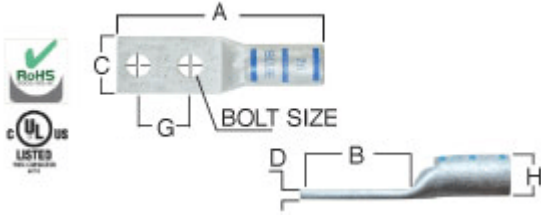


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB511241	500 kcmil	500 Navy	1/2	4.31	2.31	1.63	0.22	1.25	0.99
2	DB511241-250	500 kcmil	500 Navy	1/2	4.72	2.37	1.54	0.22	1.25	0.95
3	DB511241-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	4.59	3.05	1.89	0.26	1.25	1.17
4	DB511241-260	500 kcmil	500 Navy	1/2	4.20	2.33	1.52	0.23	1.25	0.95
5	DB511241-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	4.48	2.33	1.81	0.27	1.25	1.12
6	DB511243	500 kcmil	500 Navy	1/2	5.00	3	1.61	0.22	1.75	0.99
7	DB511243-250	500 kcmil	500 Navy	1/2	5.36	3.01	1.54	0.22	1.75	0.95
8	DB511243-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	5.09	3.55	1.89	0.26	1.75	1.17
9	DB511243-260	500 kcmil	500 Navy	1/2	4.70	2.83	1.52	0.23	1.75	0.95
10	DB511243-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	4.98	2.83	1.81	0.27	1.75	1.12
11	DB511243-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	4.98	2.83	1.63	0.27	1.75	1.12
12	DB511434-250	500 kcmil	500 Navy	1/4	3.69	1.34	1.54	0.22	0.75	0.95
13	DB511434-260	500 kcmil	500 Navy	1/4	3.26	1.39	1.52	0.23	0.75	0.95
14	DB513801	500 kcmil	500 Navy	3/8	3.93	1.93	1.61	0.22	1.00	0.99
15	DB513801-250	500 kcmil	500 Navy	3/8	4.17	1.82	1.54	0.22	1.00	0.95
16	DB513801-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	3.90	2.61	1.89	0.26	1.00	1.17
17	DB513801-260	500 kcmil	500 Navy	3/8	3.70	1.83	1.52	0.23	1.00	0.95
18	DB513801-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	3.98	1.83	1.81	0.27	1.00	1.12
19	DB513801-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	3.98	1.83	1.63	0.27	1.00	1.12
20	DB513801-262	500 kcmil	500 Navy	3/8	3.70	1.83	1.55	0.23	1.00	0.95
21	DB515601-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	5/16	3.83	2.57	1.89	0.26	1.00	1.17
22	DB515601-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	5/16	3.85	1.07	1.84	0.27	1.00	1.12
23	LB511243	500 kcmil	500 Navy	1/2	5.95	3.00	1.61	0.22	1.75	0.99
24	LB511243-250	500 kcmil	500 Navy	1/2	6.10	3.01	1.54	0.22	1.75	0.95
25	LB511243-260	500 kcmil	500 Navy	1/2	5.68	2.83	1.52	0.23	1.75	0.95
26	LB511243P-250	500 kcmil	500 Navy	1/2	6.11	3.01	1.54	0.22	1.75	0.95
27	LB511243P-251	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	6.49	3.01	1.89	0.26	1.75	1.17
28	LB511243P-260	500 kcmil	500 Navy	1/2	5.68	2.83	1.55	0.23	1.75	0.95
29	LB511243P-261	-	535.3 kcmil 1325/24 (500 MCM NOM)	1/2	6.24	2.83	1.81	0.27	1.75	1.12
30	LB511434	500 kcmil	500 Navy	1/4	4.89	1.94	1.61	0.22	0.75	0.99

500 kcmil

Compression Connectors / Two hole 0° / 500 kcmil

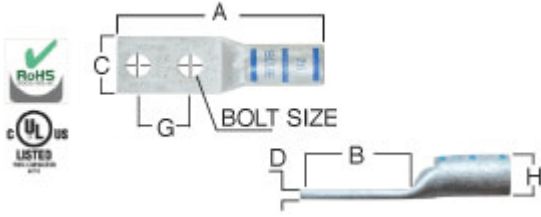

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM8 TBM12	Brown	87
Panduit	CT-720 CT-920	Brown	P87
Burndy	Y35 Y45	Brown	20


#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB511434-250	500 kcmil	500 Navy	1/4	4.43	1.34	1.54	0.22	0.75	0.95
32	LB511434-260	500 kcmil	500 Navy	1/4	4.24	1.39	1.55	0.23	0.75	0.95
33	LB511434P-250	500 kcmil	500 Navy	1/4	4.44	1.34	1.54	0.22	0.75	0.95
34	LB511434P-260	500 kcmil	500 Navy	1/4	4.24	1.39	1.55	0.23	0.75	0.95
35	LB513801	500 kcmil	500 Navy	3/8	4.88	1.93	1.61	0.22	1.00	0.99
36	LB513801-250	500 kcmil	500 Navy	3/8	4.91	1.82	1.54	0.22	1.00	0.95
37	LB513801-260	500 kcmil	500 Navy	3/8	4.68	1.83	1.55	0.23	1.00	0.95
38	LB513801P	500 kcmil	500 Navy	3/8	4.88	1.93	1.61	0.22	1.00	0.99
39	LB513801P-250	500 kcmil	500 Navy	3/8	4.92	1.82	1.54	0.22	1.00	0.95
40	LB513801P-260	500 kcmil	500 Navy	3/8	4.68	1.83	1.55	0.23	1.00	0.95
41	LB513801P-261	500 kcmil	500 Navy	3/8	5.12	1.83	1.72	0.27	1.00	0.99
42	LB513801P-263	-	535.3 kcmil 1325/24 (500 MCM NOM)	3/8	5.24	1.83	1.81	0.27	1.00	1.12
43	WP511241-134	500 kcmil	500 Navy	1/2	4.17	2.01	1.55	0.23	1.25	0.96
44	WP511243-088	500 kcmil	500 Navy	1/2	4.96	2.80	1.55	0.23	1.75	0.96
45	WP511243-189	500 kcmil	500 Navy	1/2	4.96	2.80	1.55	0.23	1.75	0.96
46	WP513801-063	500 kcmil	500 Navy	3/8	3.96	1.82	1.55	0.23	1.00	0.96
47	WP513801-182	500 kcmil	500 Navy	3/8	3.96	1.82	1.55	0.23	1.00	0.96

600 kcmil

Compression Connectors / Two hole 0°

600 kcmil

Compression Connectors / Two hole 0° / 600 kcmil

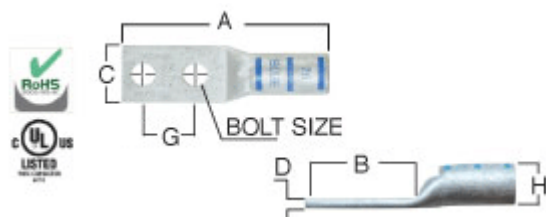

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14	Green	94
Panduit	CT-920 CT-980	Green	P94
Burndy	Y35 Y45	Green	22


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB611243	600 kcmil	1100/24 = 444 kcmil	1/2	5.15	3.00	1.75	0.24	1.75	1.08
2	DB611243-250	600 kcmil	1100/24 = 444 kcmil	1/2	5.36	3.01	1.70	0.26	1.75	1.06
3	DB611243-251	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	5.09	3.55	1.89	0.26	1.75	1.17
4	DB611243-260	600 kcmil	1100/24 = 444 kcmil	1/2	4.81	2.83	1.74	0.27	1.75	1.06
5	DB611243-261	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	4.95	2.83	1.91	0.27	1.75	1.17
6	DB613801	600 kcmil	1100/24 = 444 kcmil	3/8	4.08	1.93	1.75	0.24	1.00	1.08
7	DB613801-250	600 kcmil	1100/24 = 444 kcmil	3/8	4.17	1.82	1.70	0.26	1.00	1.06
8	DB613801-260	600 kcmil	1100/24 = 444 kcmil	3/8	3.81	1.83	1.73	0.27	1.00	1.06
9	DB651243-251	-	646 kcmil 1600/24	1/2	5.06	3.58	1.95	0.30	1.75	1.20
10	DB651243-261	-	646 kcmil 1600/24	1/2	4.95	2.83	1.95	0.30	1.75	1.20
11	DB653801-251	-	646 kcmil 1600/24	3/8	4.11	2.76	1.95	0.30	1.00	1.20
12	DB653801-261	-	646 kcmil 1600/24	3/8	3.95	1.83	1.98	0.30	1.00	1.20
13	LB611243	600 kcmil	1100/24 = 444 kcmil	1/2	6.00	3.00	1.75	0.24	1.75	1.08
14	LB611243-250	600 kcmil	1100/24 = 444 kcmil	1/2	6.29	3.01	1.70	0.26	1.75	1.06
15	LB611243-260	600 kcmil	1100/24 = 444 kcmil	1/2	6.12	2.83	1.69	0.27	1.75	1.06
16	LB611243P-250	600 kcmil	1100/24 = 444 kcmil	1/2	6.30	3.01	1.70	0.26	1.75	1.06
17	LB611243P-260	600 kcmil	1100/24 = 444 kcmil	1/2	6.12	2.83	1.74	0.27	1.75	1.06
18	LB613801	600 kcmil	1100/24 = 444 kcmil	3/8	5.80	2.80	1.75	0.24	1.00	1.08
19	LB613801-250	600 kcmil	1100/24 = 444 kcmil	3/8	5.10	1.82	1.70	0.26	1.00	1.06
20	LB613801-260	600 kcmil	1100/24 = 444 kcmil	3/8	5.12	1.83	1.74	0.26	1.00	1.06
21	LB613801P-250	600 kcmil	1100/24 = 444 kcmil	3/8	5.11	1.82	1.70	0.26	1.00	1.06
22	LB613801P-260	600 kcmil	1100/24 = 444 kcmil	3/8	5.37	2.08	1.74	0.26	1.00	1.06

700 kcmil

Compression Connectors / Two hole 0°

700 kcmil

Compression Connectors / Two hole 0° / 700 kcmil

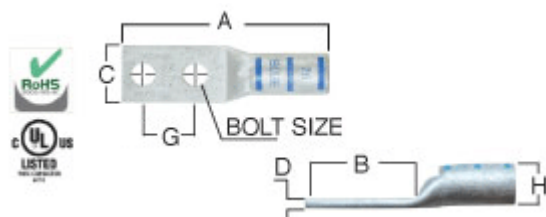

Installation Information

Manufacturer	Tools	Color	Code
T&B	40TON TBM8-750	Pink	99
Panduit	-	Pink	-
Burndy	Y39 Y644M	Pink	400


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB711221-260	700 kcmil	1325/24 = 535 kcmil	1/2	4.73	2.58	1.81	0.27	1.50	1.11
2	DB711243	700 kcmil	1325/24 = 535 kcmil	1/2	5.40	3.00	1.84	0.23	1.75	1.11
3	DB711243-242	700 kcmil	1325/24 = 535 kcmil	1/2	5.40	3.00	1.80	0.28	1.75	1.11
4	DB711243-260	700 kcmil	1325/24 = 535 kcmil	1/2	4.98	2.83	1.81	0.27	1.75	1.11
5	DB713801	700 kcmil	1325/24 = 535 kcmil	3/8	4.51	2.11	1.78	0.24	1.00	1.11
6	DB713801-242	700 kcmil	1325/24 = 535 kcmil	3/8	4.46	2.06	1.80	0.28	1.00	1.11
7	DB713801-260	700 kcmil	1325/24 = 535 kcmil	3/8	3.98	1.83	1.81	0.27	1.00	1.11
8	DB713881-260	700 kcmil	1325/24 = 535 kcmil	3/8	4.11	1.96	1.84	0.27	1.13	1.11
9	WP711241-164	700 kcmil	1325/24 = 535 kcmil	1/2	4.60	2.55	1.79	0.27	1.25	1.09
10	WP711243-041	700 kcmil	1325/24 = 535 kcmil	1/2	5.05	2.80	1.79	0.27	1.75	1.09
11	WP711243-190	700 kcmil	1325/24 = 535 kcmil	1/2	5.05	2.80	1.79	0.27	1.75	1.09
12	WP713801-165	700 kcmil	1325/24 = 535 kcmil	3/8	4.30	2.05	1.79	0.27	1.00	1.09
13	WP713801-185	700 kcmil	1325/24 = 535 kcmil	3/8	4.30	2.05	1.79	0.27	1.00	1.09

750 kcmil

Compression Connectors / Two hole 0°

750 kcmil

Compression Connectors / Two hole 0° / 750 kcmil

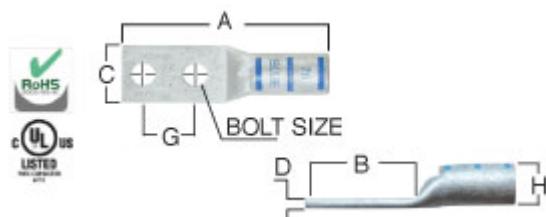


Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB751221-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	5.05	2.69	2.17	0.32	1.50	1.34
2	DB751221-260	750 kcmil	-	1/2	4.70	2.58	1.89	0.27	1.50	1.17
3	DB751221-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	4.93	2.58	2.19	0.33	1.50	1.34
4	DB751241-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	4.87	3.22	2.17	0.32	1.25	1.34
5	DB751241-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	4.68	2.33	2.19	0.33	1.25	1.34
6	DB751243	750 kcmil	-	1/2	5.23	3.00	1.94	0.27	1.75	1.20
7	DB751243-250	750 kcmil	-	1/2	5.59	3.01	1.89	0.26	1.75	1.17
8	DB751243-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	5.37	3.72	2.17	0.32	1.75	1.34
9	DB751243-260	750 kcmil	-	1/2	4.95	2.83	1.89	0.27	1.75	1.17
10	DB751243-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	1/2	5.18	2.83	2.19	0.33	1.75	1.34
11	DB753801	750 kcmil	-	3/8	5.03	2.80	1.94	0.27	1.00	1.20
12	DB753801-250	750 kcmil	-	3/8	4.64	2.06	1.89	0.26	1.00	1.17
13	DB753801-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	4.42	2.90	2.17	0.32	1.00	1.34
14	DB753801-260	750 kcmil	-	3/8	3.95	1.83	1.89	0.27	1.00	1.17
15	DB753801-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	3/8	4.18	1.83	2.19	0.33	1.00	1.34
16	DB753881-260	750 kcmil	-	3/8	4.075	1.96	1.91	0.27	1.13	1.17
17	DB755821-251	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	5.36	3.71	2.17	0.32	1.50	1.34
18	DB755821-260	750 kcmil	-	5/8	4.95	2.83	1.89	0.27	1.50	1.17
19	DB755821-261	-	777.7 kcmil 1925/24 (750 MCM NOM)	5/8	5.18	2.83	2.19	0.33	1.50	1.34
20	LB751243	750 kcmil	-	1/2	6.10	3.00	1.94	0.27	1.75	1.20
21	LB751243-241	-	1600/24 = 646 kcmil	1/2	6.10	3.00	1.94	0.27	1.75	1.20
22	LB751243-250	750 kcmil	-	1/2	6.58	3.01	1.89	0.26	1.75	1.17
23	LB751243-260	750 kcmil	-	1/2	6.41	2.83	1.89	0.27	1.75	1.17
24	LB751243P-250	750 kcmil	-	1/2	6.59	3.01	1.89	0.26	1.75	1.17
25	LB751243P-260	750 kcmil	-	1/2	6.41	2.83	1.91	0.27	1.75	1.17
26	LB753801	750 kcmil	-	3/8	5.16	2.06	1.94	0.27	1.00	1.20
27	LB753801-250	750 kcmil	-	3/8	5.63	2.06	1.89	0.26	1.00	1.17
28	LB753801-260	750 kcmil	-	3/8	5.41	1.83	1.91	0.27	1.00	1.17
29	LB753801P	750 kcmil	-	3/8	5.16	2.06	1.94	0.27	1.00	1.20
30	LB753801P-250	750 kcmil	-	3/8	5.64	2.06	1.89	0.26	1.00	1.17

750 kcmil

Compression Connectors / Two hole 0° / 750 kcmil

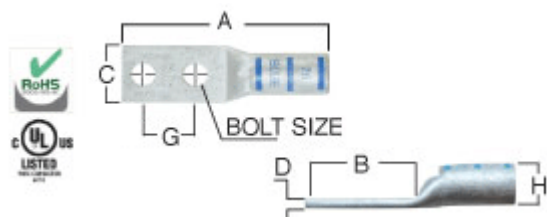

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-980	Black	P106
Burndy	Y35 Y45	Black	24


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
31	LB753801P-260	750 kcmil	-	3/8	5.66	2.08	1.91	0.27	1.00	1.17
32	WP751243-065	750 kcmil	-	1/2	5.39	2.78	1.90	0.27	1.75	1.17
33	WP751243-191	750 kcmil	-	1/2	5.39	2.78	1.90	0.27	1.75	1.17
34	WP753801-135	750 kcmil	-	3/8	5.39	2.05	1.90	0.27	1.00	1.17

800 kcmil

Compression Connectors / Two hole 0°

800 kcmil

Compression Connectors / Two hole 0° / 800 kcmil

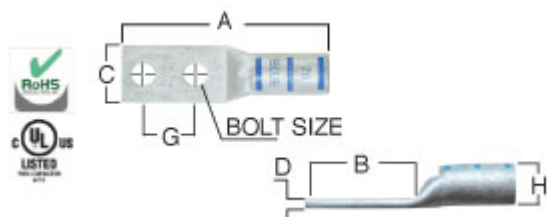

Installation Information

Manufacturer	Tools	Color	Code
T&B	15TON 40TON	Orange	107
Panduit	-	Orange	-
Burndy	Y35 Y46	Orange	25


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB811243	800 kcmil	-	1/2	5.23	3.00	2.01	0.27	1.75	1.25
2	DB811243-260	800 kcmil	-	1/2	4.95	2.83	1.89	0.30	1.75	1.25
3	DB813801-260	800 kcmil	-	3/8	3.95	1.83	1.95	0.30	1.00	1.25
4	DB813881	800 kcmil	-	3/8	4.51	2.28	2.01	0.27	1.13	1.25
5	DB813881-260	800 kcmil	-	3/8	4.08	1.96	1.98	0.30	1.13	1.25
6	LB811243-250	800 kcmil	-	1/2	6.64	3.01	1.95	0.29	1.75	1.20
7	LB811243P-250	800 kcmil	-	1/2	6.65	3.01	1.95	0.30	1.75	1.20

900 kcmil

Compression Connectors / Two hole 0°

900 kcmil

Compression Connectors / Two hole 0° / 900 kcmil

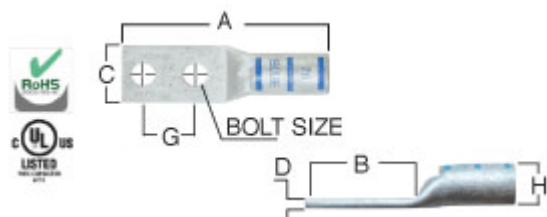

Installation Information

Manufacturer	Tools	Color	Code
T&B	12 TON 15TON	Yellow	115
Panduit	-	Yellow	-
Burndy	-	Yellow	-


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB911243	900 kcmil	1925/24 = 777 kcmil	1/2	5.4	3.00	2.18	0.31	1.75	1.35
2	DB913801	900 kcmil	1925/24 = 777 kcmil	3/8	4.46	2.06	2.18	0.31	1.00	1.35
3	DB913801-242	900 kcmil	1925/24 = 777 kcmil	3/8	4.46	2.06	2.12	0.31	1.00	1.35
4	DB915821	900 kcmil	1925/24 = 777 kcmil	5/8	5.03	2.63	2.18	0.31	1.50	1.35
5	LB911243	900 kcmil	1925/24 = 777 kcmil	1/2	6.6	3.00	2.18	0.31	1.75	1.35
6	WP911221-169	900 kcmil	1925/24 = 777 kcmil	1/2	5.58	2.58	2.18	0.33	1.50	1.32
7	WP911243-048	900 kcmil	1925/24 = 777 kcmil	1/2	5.83	2.83	2.18	0.33	1.75	1.32
8	WP911243-192	900 kcmil	1925/24 = 777 kcmil	1/2	5.83	2.83	2.18	0.33	1.75	1.32
9	WP913801-170	900 kcmil	1925/24 = 777 kcmil	3/8	5.08	2.08	2.18	0.33	1.00	1.32
10	WP913801-184	900 kcmil	1925/24 = 777 kcmil	3/8	5.08	2.08	2.18	0.33	1.00	1.32
11	WP915821-168	900 kcmil	1925/24 = 777 kcmil	5/8	5.58	2.58	2.18	0.33	1.50	1.32

1000 kcmil

Compression Connectors / Two hole 0°

1000 kcmil

Compression Connectors / Two hole 0° / 1000 kcmil

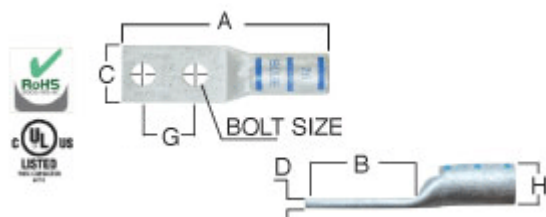

Installation Information

Manufacturer	Tools	Color	Code
T&B	14TON 15TON	White	125
Panduit	CT-920 CT-930	White	P125
Burndy	Y35 Y46	White	27


#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB111241-250	1000 kcmil	1000 Navy	1/2	5.09	2.51	2.17	0.32	1.25	1.34
2	DB111241-260	1000 kcmil	1000 Navy	1/2	4.68	2.33	2.19	0.33	1.25	1.34
3	DB111241-262	1000 kcmil	1000 Navy	1/2	4.68	2.33	2.17	0.33	1.25	1.34
4	DB111243	1000 kcmil	1000 Navy	1/2	5.45	3.00	2.27	0.30	1.75	1.40
5	DB111243-250	1000 kcmil	1000 Navy	1/2	5.59	3.01	2.17	0.32	1.75	1.34
6	DB111243-260	1000 kcmil	1000 Navy	1/2	5.18	2.83	2.17	0.33	1.75	1.34
7	LB111243	1000 kcmil	1000 Navy	1/2	6.55	3.00	2.27	0.30	1.75	1.40
8	LB111243-250	1000 kcmil	1000 Navy	1/2	6.70	3.01	2.17	0.32	1.75	1.34
9	LB111243-260	1000 kcmil	1000 Navy	1/2	6.53	2.83	2.17	0.33	1.75	1.34
10	LB111243P-250	1000 kcmil	1000 Navy	1/2	6.71	3.01	2.17	0.32	1.75	1.34
11	LB111243P-260	1000 kcmil	1000 Navy	1/2	6.53	2.83	2.19	0.33	1.75	1.34
12	LB113801	1000 kcmil	1000 Navy	3/8	6.35	2.80	2.27	0.30	1.00	1.40
13	LB113801-250	1000 kcmil	1000 Navy	3/8	5.75	2.06	2.17	0.32	1.00	1.34
14	LB113801-260	1000 kcmil	1000 Navy	3/8	5.53	1.83	2.19	0.33	1.00	1.34
15	LB113801P-250	1000 kcmil	1000 Navy	3/8	5.76	2.06	2.17	0.32	1.00	1.34
16	LB113801P-260	1000 kcmil	1000 Navy	3/8	5.78	2.08	2.19	0.33	1.00	1.34

350 kcmil

Compression Connectors / Two hole 0°

350 kcmil

Compression Connectors / Two hole 0° / 350 kcmil

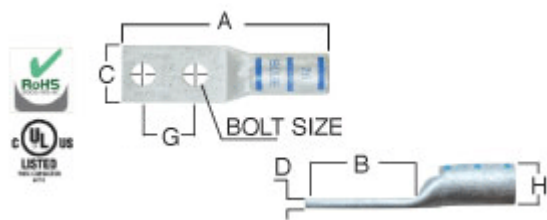

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-920 CT-920CH	Blue	P76
Burndy	Y35 Y45	Blue	19

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

400 kcmil

Compression Connectors / Two hole 0°

400 kcmil

Compression Connectors / Two hole 0° / 400 kcmil

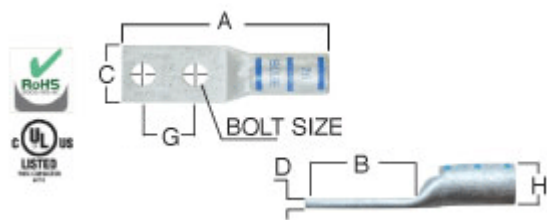

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6H 6TOM	--	80
Panduit	-	--	-
Burndy	-	--	-

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

500 kcmil

Compression Connectors / Two hole 0°

500 kcmil

Compression Connectors / Two hole 0° / 500 kcmil

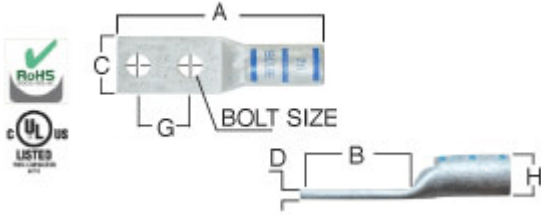

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Pink	-
Panduit	CT-920 CT-930	Pink	P99
Burndy	Y35 Y45	Pink	L99

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

650 kcmil

Compression Connectors / Two hole 0°

650 kcmil

Compression Connectors / Two hole 0° / 650 kcmil

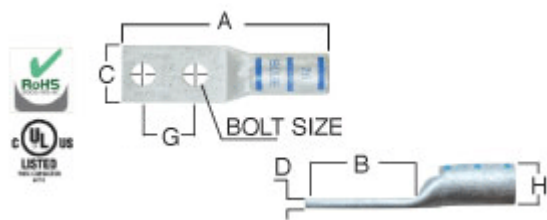

Installation Information

Manufacturer	Tools	Color	Code
T&B	-	Black	-
Panduit	CT-920 CT-930	Black	106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

750 kcmil

Compression Connectors / Two hole 0°

750 kcmil

Compression Connectors / Two hole 0° / 750 kcmil

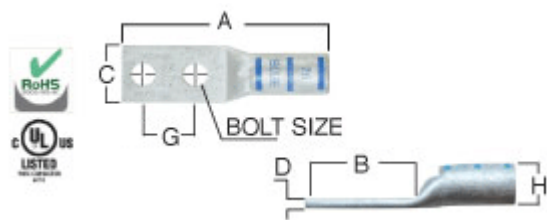

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM12 TBM14M	Black	106
Panduit	CT-920 CT-920CH	Black	P106
Burndy	Y35 Y45	Black	24

#	Cat.No	Wire Size			Dimension (in.)					
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

4/0 weld

Compression Connectors / Two hole 0°

4/0 weld

Compression Connectors / Two hole 0° / 4/0 weld

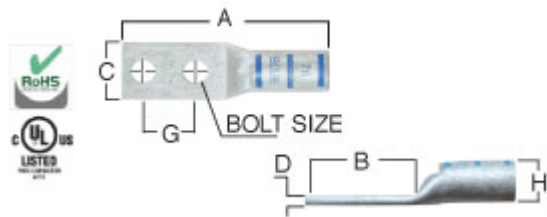

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM5 TBM6	Yellow	62
Panduit	-	Yellow	-
Burndy	MY29 Y644M	Yellow	16

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

250 kcmil

Compression Connectors / Two hole 0°

250 kcmil

Compression Connectors / Two hole 0° / 250 kcmil

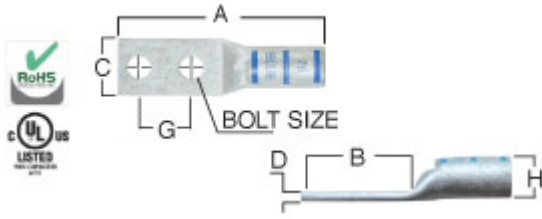

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	White	66
Panduit	-	White	-
Burndy	Y35 Y45	White	17

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H


No items in this section.

300 kcmil

Compression Connectors / Two hole 0°

300 kcmil

Compression Connectors / Two hole 0° / 300 kcmil

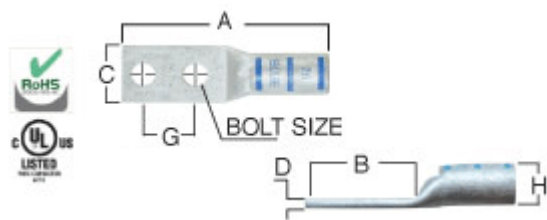

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-980	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H

No items in this section.