

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF CELESTRA, IS DISCLOSED IN CONFIDENCE AND NOT TO BE REPRODUCED, USED OR DISCLOSED EXCEPT FOR WHICH FURNISHED.

| CELESTRA CAT.NO | WIRE SIZE | | BOLT SIZE | B MIN | C ±0.04 | D ±0.015 | H ±0.01 |
|--------------------|-----------|--|--------------|----------|------------|-------------|------------|
| | CODE | FLEX | | | | | |
| DA4038F | 4/0 AWG | 200 Navy 3/0 Weld 450/24 = 182 kcmil 703/.0154 | 3/8 | 0.93 | 1.03 | 0.14 | 0.56 |

D
NOTE:




1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. ALL DA,DB,LA,LB,WP,AL,AS AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTRO-TIN PLATE UNLESS OTHERWISE SPECIFIED PLATE PER MIL - T -16366.
SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = 54
DIE COLOR = Purple

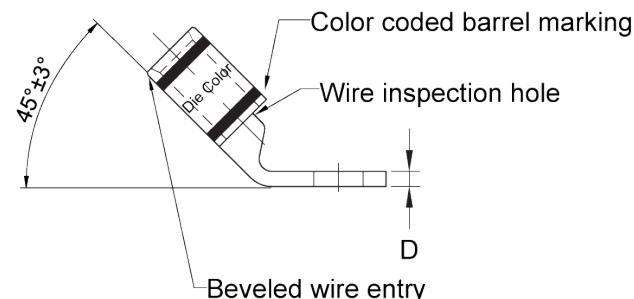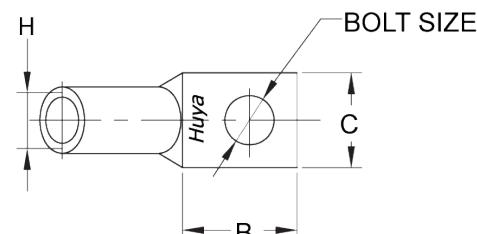

| | | | | | |
|-----|-----------|-----------|-----------|-------------------------------------|-----|
| 00 | 17-Jan-26 | Ruby Feng | Sinia Qiu | Celestra Standards Spec. Initiated. | ECN |
| REV | DATE | DWN | CHK | DESCRIPTION | ECN |

| | | | | | |
|----------|----------------------------------|--|------------|----------------------|------|
| TITLE | | WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE | | CELESTRA CORPORATION | |
| MATERIAL | HIGH-CONDUCTIVITY WROUGHT COPPER | PRT. NO. | DA4038F | SCALE | NTS |
| FINISH | ELECTRO TIN PLATE | DWG. NO. | 186-cp1079 | UNIT | INCH |

