| CELESTRA CAT.NO | WIRE SIZE | | BOLT SIZE | B MIN ±0.04 | C ±0.01 | H ±0.015 | D ±0.015 |
	CODE	FLEX					
DA1158A	1000 kcmil	1000 Navy	5/8	1.58	2.27	1.25	0.30

NOTE:

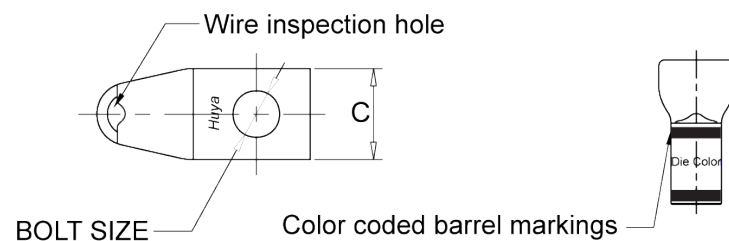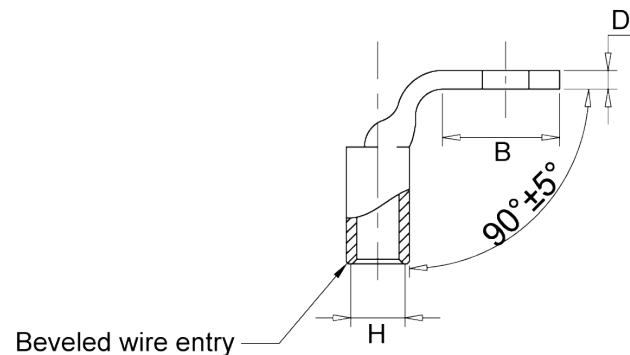1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

2. ALL DA,DB,LA,LB,WP AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

   PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTOR-TIN PLATE UNLESS OTHERWISE SPECIFED PLATE PER MIL - T -16366. SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = 125
DIE COLOR = White

Beveled wire entry

$90° ±5°$

Wire inspection hole

BOLT SIZE

Color coded barrel markings

Die Color

c(UL)us LISTED
WIRE CONNECTORS
ZMVV/2/7/8.E513913

RoHS
2002/95/EC

HUYA®
www.huyaco.com

CELESTRA CORPORATION
76. Huancun Rd. Zhongcun Town.
Panyu Dist. Guangzhou 511495.

TITLE WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE

| 00 | 23-Aug-25 | Ruby Feng | Sinia Qiu | Celestra Standards Spec. Initialed. | | MATERIAL HIGH-CONDUCTIVITY WROUGHT COPPER | PRT. NO. DA1158A | SCALE NTS | THRID ANGLE PROJECTION |
| REV | DATE | DWN | CHK | DESCRIPTION | ECN | FINISH ELECTRO TIN PLATE | DWG. NO. 186-cp1932 | UNIT INCH | |