CELESTRA CAT.NO	WIRE SIZE		BOLT SIZE	A ±0.06	B MIN	C ±0.04	D ±0.015	G ±0.02	H ±0.01
	CODE	FLEX							
DB251243-263	?	250 kcmil 637/24 Class I, K, M	?1/2	4.24	2.83	1.29	0.18	1.75	0.79

NOTE:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. ALL DA,DB,LA,LB,WP AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

   PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTOR-TIN PLATE UNLESS OTHERWISE SPECIFED PLATE PER MIL - T -16366.
SUFFIX CAT.NO.WITH "SP" FOR SILVER.

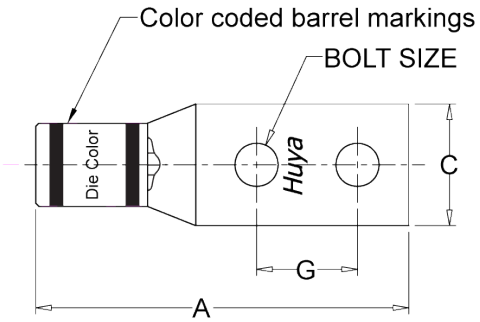

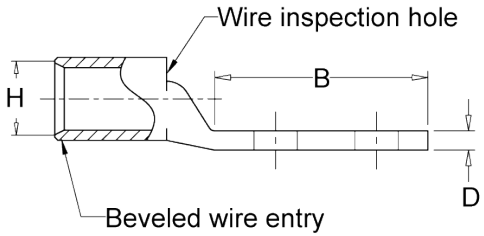



INSTALLATION GUIDE
DIE CODE = 62
DIE COLOR = Yellow

c UL us LISTED
WIRE CONNECTORS
ZMVV/2/7/8.E513813

RoHS 2002/95/EC

REV	DATE	DWN	CHK	DESCRIPTION	ECN
00	04-May-25	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initialed.	

HUYA®
www.huyaco.com

CELESTRA CORPORATION
76. Huancun Rd. Zhongcun Town.
Panyu Dist. Guangzhou 511495.

TITLE: WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE

MATERIAL	PRT. NO.	SCALE	THRID ANGLE PROJECTION
HIGH-CONDUCTIVITY WROUGHT COPPER	DB251243-263	NTS	
FINISH: ELECTRO TIN PLATE	DWG. NO. 186-cp3106	UNIT: INCH	