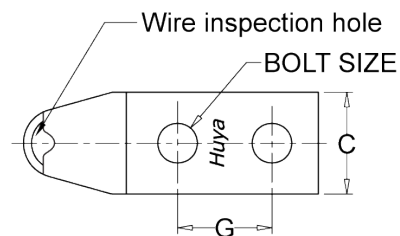| CELESTRA CAT.NO | WIRE SIZE | | BOLT SIZE | B MIN | C ±0.015 | D ±0.02 | G | H ±0.01 |
	CODE	FLEX		±0.04			±0.02	
LB141458AP-250	#14-#10 AWG	–	1/4	1.25	0.42	0.05	0.63	0.18

NOTE:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

2. ALL DA,DB,LA,LB,WP AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

   PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTOR-TIN PLATE UNLESS OTHERWISE SPECIFED PLATE PER MIL - T -16366. SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = -
DIE COLOR = --

Beveled wire entry

90° ±5°

Wire inspection hole

BOLT SIZE

Huya

Color coded barrel markings

Die Color

cULus LISTED WIRE CONNECTORS ZMVV/2/7/8.E513913

RoHS 2002/95/EC

HUYA®
www.huyaco.com

CELESTRA CORPORATION
76. Huancun Rd. Zhongcun Town.
Panyu Dist. Guangzhou 511495.

TITLE WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE

REV	DATE	DWN	CHK	DESCRIPTION	ECN
00	23-Aug-25	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initialed.	

MATERIAL HIGH-CONDUCTIVITY WROUGHT COPPER
FINISH ELECTRO TIN PLATE

PRT. NO. LB141458AP-250
DWG. NO. 186-cp4203

SCALE NTS
UNIT INCH

THRID ANGLE PROJECTION