

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF CELESTRA, IS DISCLOSED IN CONFIDENCE AND NOT TO BE REPRODUCED, USED OR DISCLOSED EXCEPT FOR WHICH FURNISHED.

| CELESTRA CAT.NO. | WIRE SIZE | | BOLT SIZE | B MIN | C ± 0.04 | D ± 0.015 | G ± 0.02 | H ± 0.01 |
|---------------------|-----------|----------------|--------------|----------|-----------------|------------------|-----------------|-----------------|
| | CODE | FLEX | | | | | | |
| LB043834AP-261 | #4 AWG | 105/24 #4 Weld | 3/8 | 1.58 | 0.58 | 0.08 | 0.75 | 0.33 |

D NOTE:



1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. ALL DA,DB,LA,LB,WP,AL,AS AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".


MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTRO-TIN PLATE UNLESS OTHERWISE SPECIFIED PLATE PER MIL - T -16366. SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = 29
DIE COLOR = Gray

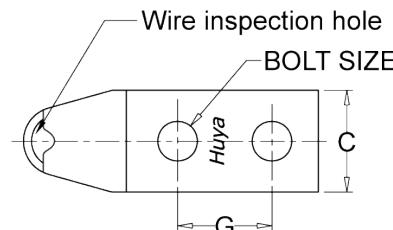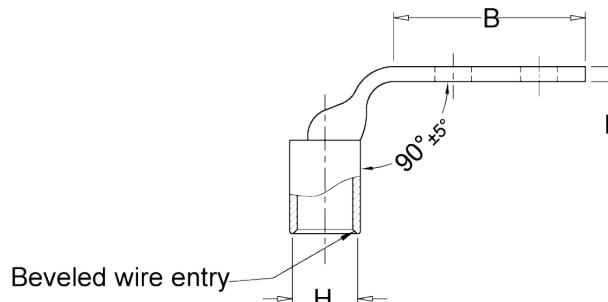

Color coded barrel markings



| | | | | | |
|-----|-----------|-----------|-----------|-------------------------------------|-----|
| 00 | 14-Feb-26 | Ruby Feng | Sinia Qiu | Celestra Standards Spec. Initiated. | |
| REV | DATE | DWN | CHK | DESCRIPTION | ECN |

| | | | | | | |
|----------|----------------------------------|----------|----------------|--|------|------------------------|
| TITLE | | | | WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE | | |
| MATERIAL | HIGH-CONDUCTIVITY WROUGHT COPPER | PRT. NO. | LB043834AP-261 | SCALE | NTS | THIRD ANGLE PROJECTION |
| FINISH | ELECTRO TIN PLATE | DWG. NO. | 186-cp4411 | UNIT | INCH | |