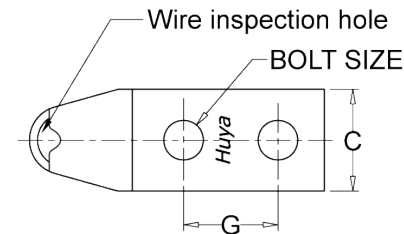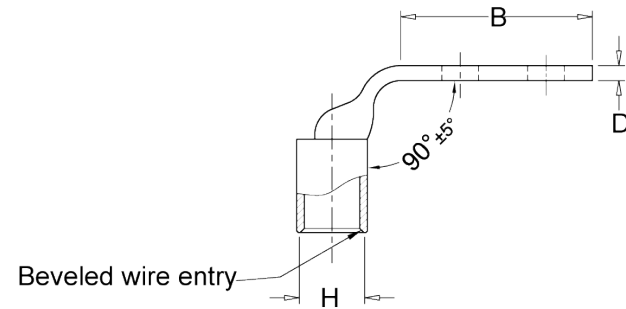| CELESTRA CAT.NO | WIRE SIZE | | BOLT SIZE | B MIN | C ±0.015 | D ±0.02 | G | H ±0.01 |
	CODE	FLEX		±0.04			±0.02	
LB103801AP-260	1/0 AWG	100 Navy #1 Weld 225/24 = 90.8 kcmil 133/.0254	3/8	1.83	0.75	0.12	1.00	0.45

NOTE:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

2. ALL DA,DB,LA,LB,WP AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

   PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTOR-TIN PLATE UNLESS OTHERWISE SPECIFED PLATE PER MIL - T -16366. SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = 42
DIE COLOR = Pink

Beveled wire entry

B

D

90° ±5°

H

Wire inspection hole

BOLT SIZE

Huya

C

G

Die Color

Color coded barrel markings

c(UL)us LISTED
WIRE CONNECTORS
ZMVV/2/7/8.E513913

RoHS 2002/95/EC

HUYA®
www.huyaco.com

CELESTRA CORPORATION
76. Huancun Rd. Zhongcun Town.
Panyu Dist. Guangzhou 511495.

TITLE: WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE

REV	DATE	DWN	CHK	DESCRIPTION	ECN
00	23-Aug-25	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initialed.	

MATERIAL: HIGH-CONDUCTIVITY WROUGHT COPPER
FINISH: ELECTRO TIN PLATE
PRT. NO. LB103801AP-260
DWG. NO. 186-cp4613
SCALE: NTS
UNIT: INCH
THRID ANGLE PROJECTION