

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF CELESTRA, IS DISCLOSED IN CONFIDENCE AND NOT TO BE REPRODUCED, USED OR DISCLOSED EXCEPT FOR WHICH FURNISHED.

CELESTRA CAT.NO.	WIRE SIZE		BOLT SIZE	B MIN	C ±0.04	D ±0.015	G ±0.02	H ±0.01
	CODE	FLEX						
LB353801AP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.83	1.55	0.23	1.00	0.95

D
NOTE:



1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. ALL DA,DB,LA,LB,WP,AL,AS AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".


MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTRO-TIN PLATE UNLESS OTHERWISE SPECIFIED PLATE PER MIL - T -16366. SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = 71
DIE COLOR = Red

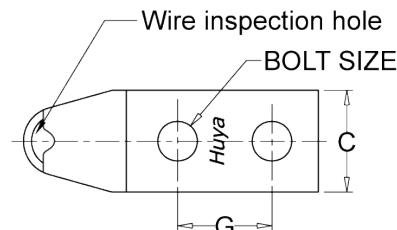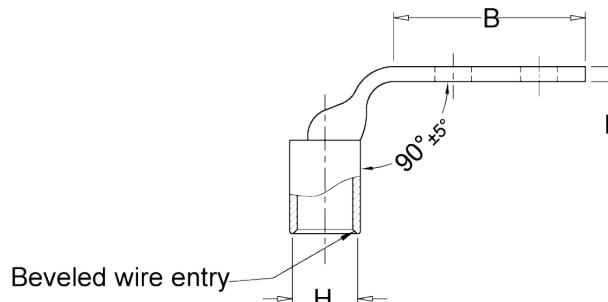

Color coded barrel markings



00	13-Feb-26	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initiated.	
REV	DATE	DWN	CHK	DESCRIPTION	ECN

TITLE		WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE		CELESTRA CORPORATION	
MATERIAL	HIGH-CONDUCTIVITY WROUGHT COPPER	PRT. NO.	LB353801AP-261	SCALE	NTS
FINISH	ELECTRO TIN PLATE	DWG. NO.	186-cp4885	UNIT	INCH

