CELESTRA CAT.NO	WIRE SIZE		BOLT SIZE	B MIN	C ±0.04	D ±0.015	G ±0.02	H ±0.01
	CODE	FLEX						
LB351243AP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.83	1.55	0.23	1.75	0.95

NOTE:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. ALL DA,DB,LA,LB,WP,AL,AS AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

   PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTOR-TIN PLATE UNLESS OTHERWISE SPECIFED PLATE PER MIL - T -16366.
SUFFIX CAT.NO.WITH "SP" FOR SILVER.

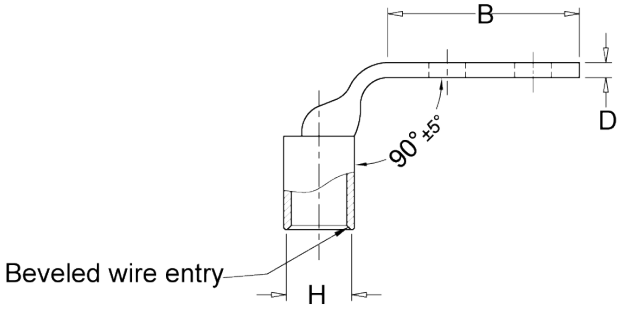

INSTALLATION GUIDE
DIE CODE = 71
DIE COLOR = Red

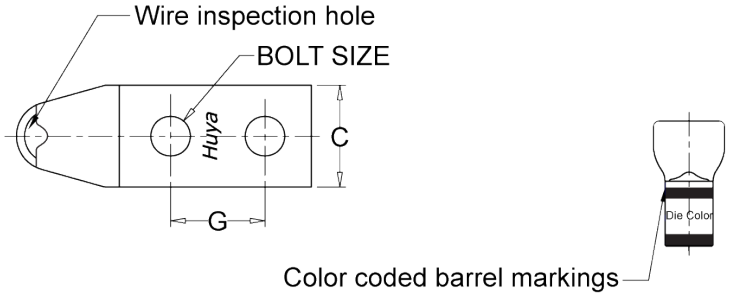

cULus LISTED WIRE CONNECTORS ZMVV(2/7)8.E513813

RoHS 2002/95/EC

REV	DATE	DWN	CHK	DESCRIPTION	ECN
00	15-Dec-25	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initialed.	

HUYA®
www.huyaco.com

CELESTRA CORPORATION
76. Huancun Rd. Zhongcun Town.
Panyu Dist. Guangzhou 511495.

TITLE: WIRE CONNECTORS AND SOLDERING LUGS FOR CODE AND FLEX CABLE

MATERIAL	PRT. NO.	SCALE	THRID ANGLE PROJECTION
HIGH-CONDUCTIVITY WROUGHT COPPER	LB351243AP-261	NTS	
FINISH: ELECTRO TIN PLATE	DWG. NO. 186-cp4886	UNIT: INCH	