| 4 | | 3 | | 2 | | 1 | |

CELESTRA CAT.NO	WIRE SIZE		BOLT SIZE	B MIN	C ±0.015	D ±0.02	G ±0.02	H ±0.01
	CODE	FLEX						
DB611243A-261	600 kcmil	535.3 kcmil 1325/24 500 kcmil	1/2	2.83	1.91	0.27	1.75	1.17

D

NOTE:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

2. ALL DA,DB,LA,LB,WP AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

   PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".

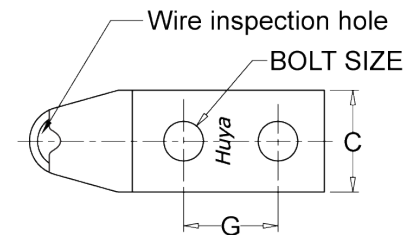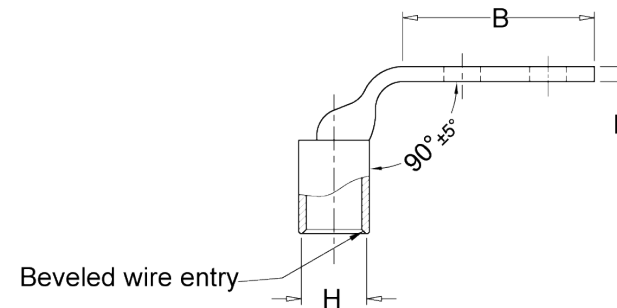MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTOR-TIN PLATE UNLESS OTHERWISE SPECIFED PLATE PER MIL - T -16366. SUFFIX CAT.NO.WITH "SP" FOR SILVER.

INSTALLATION GUIDE
DIE CODE = 94
DIE COLOR = Green

Beveled wire entry — $90° \pm 5°$ — B — D — H

Wire inspection hole
BOLT SIZE
Huya
C
G

Color coded barrel markings — Die Color

C

B

cULus LISTED
WIRE CONNECTORS
ZMVV/2/7/8.E513913

RoHS
2002/95/EC

A

HUYA®
www.huyaco.com

CELESTRA CORPORATION
76. Huancun Rd. Zhongcun Town.
Panyu Dist. Guangzhou 511495.

TITLE
WIRE CONNECTORS AND SOLDERING
LUGS FOR CODE AND FLEX CABLE

00	23-Aug-25	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initialed.		MATERIAL HIGH-CONDUCTIVITY WROUGHT COPPER	PRT. NO. DB611243A-261	SCALE NTS	THRID ANGLE PROJECTION
REV	DATE	DWN	CHK	DESCRIPTION	ECN	FINISH ELECTRO TIN PLATE	DWG. NO. 186-cp4973	UNIT INCH	

| 4 | | 3 | | 2 | | 1 | |