

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF CELESTRA, IS DISCLOSED IN CONFIDENCE AND NOT TO BE REPRODUCED, USED OR DISCLOSED EXCEPT FOR WHICH FURNISHED.

CELESTRA CAT.NO	WIRE SIZE		BOLT SIZE	A ±0.06	B MIN	C ±0.04	R	ID ±0.01
	CODE	FLEX						
DA2512-241	-	250 Weld 650/24 = 262 kcmil 259/.0311, 703/.0189	1/2	2.65	1.25	1.25	1.40	0.70

D NOTE:


1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
2. ALL DA,DB,LA,LB,WP,AL,AS AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.

PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO. WITH "P".



MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER

FINISH: ELECTRO-TIN PLATE UNLESS OTHERWISE SPECIFIED PLATE PER MIL - T -16366.  
SUFFIX CAT.NO.WITH "SP" FOR SILVER.

### Color coded marking

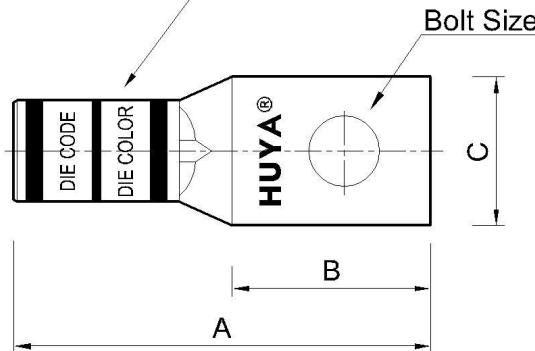

INSTALLATION GUIDE  
DIE CODE = 66  
DIE COLOR = White

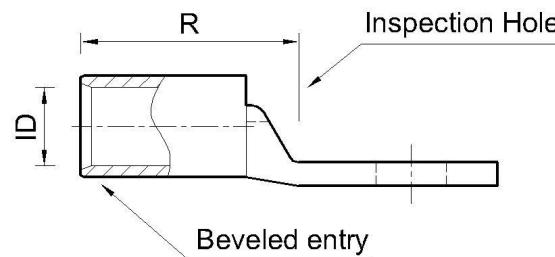

00	18-Jan-26	Ruby Feng	Sinia Qiu	Celestra Standards Spec. Initiated.					
REV	DATE	DWN	CHK	DESCRIPTION	ECN	MATERIAL HIGH-CONDUCTIVITY WROUGHT COPPER	PRT. NO. DA2512-241	SCALE NTS	THIRD ANGLE PROJECTION
						FINISH ELECTRO TIN PLATE	DWG. NO. 186-cp0722	UNIT INCH	