

THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF CELESTRA, IS  
DISCLOSED IN CONFIDENCE AND NOT TO BE REPRODUCED, USED OR  
DISCLOSED EXCEPT FOR WHICH FURNISHED.

| CELESTRA<br>CAT.NO | WIRE SIZE |          | BOLT<br>SIZE | B<br>MIN | C<br>±0.04 | D<br>±0.015 | G<br>±0.02 | H<br>±0.01 |
|--------------------|-----------|----------|--------------|----------|------------|-------------|------------|------------|
|                    | CODE      | FLEX     |              |          |            |             |            |            |
| WP511243A-092      | 500 kcmil | 500 Navy | 1/2          | 2.79     | 1.55       | 0.23        | 1.75       | 0.96       |


NOTE: 1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

2. ALL DA,DB,LA,LB,WP,AL,AS AND J SERIES OF CAT.NO.S ARE LISTED BY "UNDERWRITERS INC." AND "CSA" FOR USE ON CODE WIRES AND FLEX/24 STRANDED CABLES.


PRE-FIX CAT.NO.WITH "L" HAS NOT PEEP HOLE UNLESS  
OTHERWISE SPECIFIED IN THE SUFFIX OF THE CAT.NO.  
WITH "P".

MATERIAL: HIGH CONDUCTIVITY WROUGHT COPPER


FINISH: ELECTRO-TIN PLATE UNLESS OTHERWISE  
SPECIFIED PLATE PER MIL - T - 16366.  
SUFFIX CAT.NO. WITH "SP" FOR SILVER.

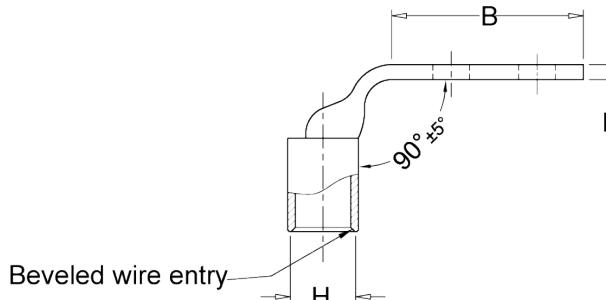

### Beveled wire entry

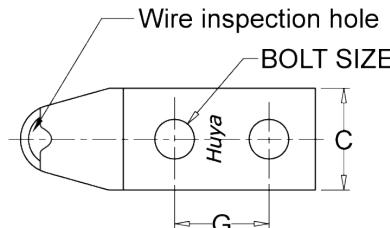

### Color coded barrel markings



INSTALLATION GUIDE  
DIE CODE = 87  
DIE COLOR = Brown

