


400 kcmil Catalog

Compression Connectors / Two hole 0°

CATEGORY EDITION

400 kcmil

Compression Connectors / Two hole 0° / 400 kcmil

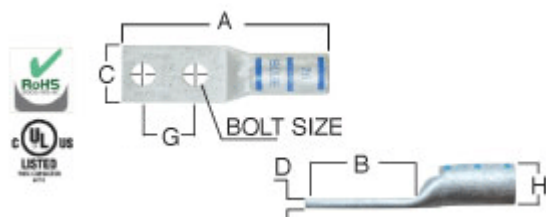

Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Blue	76
Panduit	CT-720 CT-920	Blue	P76
Burndy	Y35 Y45	Blue	19

#	Cat.No	Wire Size		Dimension (in.)						
		Code	Flex Class G,H,I,K,M	Bolt Size	A	B	C	D	G	H
1	DB411243-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	5.00	3.00	1.61	0.22	1.75	0.93
2	DB411243-250	400 kcmil	400 Navy	1/2	5.11	3.01	1.39	0.18	1.75	0.86
3	DB411243-260	400 kcmil	400 Navy	1/2	4.62	2.83	1.38	0.19	1.75	0.86
4	DB413801	400 kcmil	400 Navy	3/8	3.88	1.93	1.41	0.17	1.00	0.88
5	DB413801-241	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	4.25	2.25	1.61	0.22	1.00	0.93
6	DB413801-243	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	4.06	2.06	1.61	0.22	1.00	0.93
7	DB413801-250	400 kcmil	400 Navy	3/8	3.92	1.82	1.39	0.18	1.00	0.86
8	DB413801-260	400 kcmil	400 Navy	3/8	3.62	1.83	1.40	0.19	1.00	0.86
9	DB413801-262	400 kcmil	400 Navy	3/8	3.62	1.83	1.38	0.19	1.00	0.86
10	DB413861	400 kcmil	400 Navy	3/8	3.88	1.93	1.41	0.17	1.06	0.88
11	DB413861-260	400 kcmil	400 Navy	3/8	3.68	1.8925	1.40	0.19	1.06	0.86
12	LB411243	400 kcmil	400 Navy	1/2	5.45	3.00	1.41	0.17	1.75	0.88
13	LB411243-250	400 kcmil	400 Navy	1/2	5.90	3.01	1.39	0.18	1.75	0.86
14	LB411243-260	400 kcmil	400 Navy	1/2	5.55	2.83	1.38	0.19	1.75	0.86
15	LB411243P-250	400 kcmil	400 Navy	1/2	5.91	3.01	1.28	0.17	1.75	0.86
16	LB411243P-260	400 kcmil	400 Navy	1/2	5.55	2.83	1.40	0.19	1.75	0.86
17	LB411434	400 kcmil	400 Navy	1/4	4.38	1.93	1.41	0.17	0.75	0.88
18	LB411434-250	400 kcmil	400 Navy	1/4	4.23	1.34	1.39	0.18	0.75	0.86
19	LB411434P-250	400 kcmil	400 Navy	1/4	4.24	1.34	1.39	0.18	0.75	0.86
20	LB413801	400 kcmil	400 Navy	3/8	4.38	1.93	1.41	0.17	1.00	0.88
21	LB413801-250	400 kcmil	400 Navy	3/8	4.71	1.82	1.39	0.18	1.00	0.86
22	LB413801-260	400 kcmil	400 Navy	3/8	4.55	1.83	1.38	0.19	1.00	0.86
23	LB413801P-250	400 kcmil	400 Navy	3/8	4.72	1.82	1.39	0.18	1.00	0.86
24	LB413801P-260	400 kcmil	400 Navy	3/8	4.55	1.83	1.40	0.19	1.00	0.86
25	WP411241-163	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	4.17	2.06	1.55	0.23	1.25	0.94
26	WP411243-034	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	1/2	4.96	2.87	1.55	0.23	1.75	0.94
27	WP413801-086	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	3.89	1.81	1.55	0.23	1.00	0.94
28	WP413801-183	-	400 Weld 925/24 = 373 kcmil 259/.0393 427/.0306	3/8	3.89	1.82	1.55	0.23	1.00	0.94