


# 350 kcmil Catalog

Compression Connectors / Two hole 45°

CATEGORY EDITION

# 350 kcmil

Compression Connectors / Two hole 45° / 350 kcmil

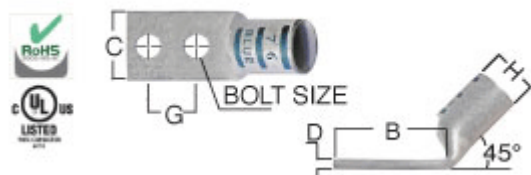


## Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
1	DB351241F-250	350 kcmil	350 Navy	1/2	2.37	1.28	0.17	1.25	0.79
2	DB351241F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.37	1.54	0.22	1.25	0.95
3	DB351241F-260	350 kcmil	350 Navy	1/2	2.33	1.29	0.18	1.25	0.79
4	DB351241F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.33	1.52	0.23	1.25	0.95
5	DB351243F	350 kcmil	350 Navy	1/2	3.00	1.36	0.18	1.75	0.84
6	DB351243F-250	350 kcmil	350 Navy	1/2	3.01	1.28	0.16	1.75	0.79
7	DB351243F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	3.01	1.54	0.22	1.75	0.95
8	DB351243F-260	350 kcmil	350 Navy	1/2	2.83	1.29	0.18	1.75	0.79
9	DB351243F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.83	1.52	0.23	1.75	0.95
10	DB351434F-250	350 kcmil	350 Navy	1/4	1.34	1.28	0.17	0.75	0.79
11	DB351434F-260	350 kcmil	350 Navy	1/4	1.39	1.29	0.18	0.75	0.79
12	DB353801F	350 kcmil	350 Navy	3/8	1.93	1.36	0.18	1.00	0.84
13	DB353801F-250	350 kcmil	350 Navy	3/8	1.82	1.28	0.17	1.00	0.79
14	DB353801F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.82	1.54	0.22	1.00	0.95
15	DB353801F-260	350 kcmil	350 Navy	3/8	1.83	1.29	0.18	1.00	0.79
16	DB353801F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.83	1.52	0.23	1.00	0.95
17	DB353843F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	2.57	1.54	0.22	1.75	0.95
18	DB353843F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	2.58	1.55	0.23	1.75	0.95
19	DB355601F-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	5/16	1.75	1.55	0.22	1.00	0.95
20	DB355601F-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	5/16	1.70	1.55	0.23	1.00	0.95
21	DB355643F-260	350 kcmil	350 Navy	5/16	2.45	1.29	0.18	1.75	0.79
22	LB351243F	350 kcmil	350 Navy	1/2	3.00	1.36	0.18	1.75	0.84
23	LB351243F-250	350 kcmil	350 Navy	1/2	3.01	1.28	0.17	1.75	0.79
24	LB351243F-260	350 kcmil	350 Navy	1/2	2.83	1.29	0.18	1.75	0.79
25	LB351243FP-250	350 kcmil	350 Navy	1/2	3.01	1.28	0.17	1.75	0.79
26	LB351243FP-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	3.01	1.54	0.22	1.75	0.95
27	LB351243FP-260	350 kcmil	350 Navy	1/2	2.83	1.29	0.18	1.75	0.79
28	LB351243FP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/2	2.83	1.55	0.23	1.75	0.95
29	LB351434F	350 kcmil	350 Navy	1/4	1.93	1.36	0.18	0.75	0.84
30	LB351434F-250	350 kcmil	350 Navy	1/4	1.34	1.28	0.17	0.75	0.79

# 350 kcmil

Compression Connectors / Two hole 45° / 350 kcmil

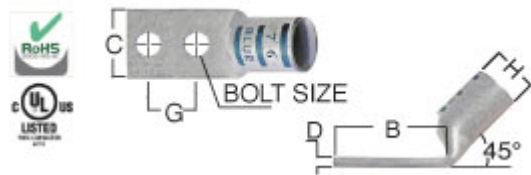

## Installation Information

Manufacturer	Tools	Color	Code
T&B	TBM6 TBM8	Red	71
Panduit	CT-720 CT-920	Red	P71
Burndy	Y35 Y45	Red	18

#	Cat.No	Wire Size			Dimension (in.)				
		Code	Flex Class G,H,I,K,M	Bolt Size	B	C	D	G	H
31	LB351434F-260	350 kcmil	350 Navy	1/4	1.39	1.29	0.18	0.75	0.79
32	LB351434FP-250	350 kcmil	350 Navy	1/4	1.34	1.28	0.17	0.75	0.79
33	LB351434FP-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/4	1.34	1.54	0.22	0.75	0.95
34	LB351434FP-260	350 kcmil	350 Navy	1/4	1.39	1.29	0.18	0.75	0.79
35	LB351434FP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	1/4	1.39	1.55	0.23	0.75	0.95
36	LB353801F	350 kcmil	350 Navy	3/8	1.93	1.36	0.18	1.00	0.84
37	LB353801F-250	350 kcmil	350 Navy	3/8	1.82	1.28	0.17	1.00	0.79
38	LB353801F-260	350 kcmil	350 Navy	3/8	1.83	1.29	0.18	1.00	0.79
39	LB353801FP	350 kcmil	350 Navy	3/8	1.93	1.36	0.18	1.00	0.84
40	LB353801FP-250	350 kcmil	350 Navy	3/8	1.82	1.28	0.17	1.00	0.79
41	LB353801FP-251	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.82	1.54	0.22	1.00	0.95
42	LB353801FP-260	350 kcmil	350 Navy	3/8	1.83	1.29	0.18	1.00	0.79
43	LB353801FP-261	350 kcmil	373.7 kcmil 925/24 350 kcmil	3/8	1.83	1.55	0.23	1.00	0.95
44	WP351243F-082	350 kcmil	350 Navy	1/2	2.79	1.29	0.18	1.75	0.80
45	WP353801F-044	350 kcmil	350 Navy	3/8	1.79	1.29	0.18	1.00	0.80